

InControl 2 Appliance Setup Guide

for Appliance Software 2.14.1.2

(Last updated: 2025-12-29)

Contents

[Contents](#)

[1. Virtual Appliance](#)

[1.1 Introduction](#)

[1.2 Hardware Requirements](#)

[1.3 Installation on VMware ESXi](#)

[Compatibility](#)

[Networking](#)

[Creating InControl and DB VMs](#)

[1.4 Installation on Microsoft Hyper-V](#)

[Networking](#)

[Creating InControl and DB VMs](#)

[Uploading and Adding data storage to the VMs](#)

[Powering up VMs](#)

[1.5 Installation on KVM on Peplink Edge Computing Platform](#)

[1.6 Installation on AWS](#)

[1.6.1 Preparing AMIs](#)

[1.6.1.1 For general AWS regions](#)

[1.6.1.2 For AWS GovCloud](#)

[Uploading the images to S3 Bucket](#)

[Creating the required import role and policy](#)

[Importing the AMI to AWS](#)

[1.6.2 Setting up network](#)

[1.6.3 Setting up security groups](#)

[1.6.4 Setting up Route 53 Hosted private zone](#)

[1.6.5 Creating a role for Route 53 DNS update and snapshot creation](#)

[1.6.6 Launching instances](#)

[1.6.7 Associate Elastic IP address](#)

[1.6.8 Reset control panel admin password on AWS](#)[1.7 Installation on Google Cloud Platform](#)[1.7.1 Request the disk images](#)[1.7.2 Uploading the images](#)[1.7.3 Importing the image](#)[1.7.4 Setting up the firewall](#)[1.7.5 Creating the instances](#)[1.8 Installation on Azure](#)[1.8.1 Create the InControl instance](#)[1.8.2 Create an internal network and attach a second network interface](#)[1.8.3 Create the Database instance](#)[1.9 Accessing the Control Panel](#)[1.10 IP Address Configuration and Password Reset On the Console](#)[1.10.1 How to change the VMs' IP on the Internal network?](#)[1.11 Software License](#)[1.12 Automatic Synchronization of Service Expiration Records](#)[1.12.1 Synchronization via External Computer with Internet Connectivity](#)[1.12.2 Fully Offline Synchronization](#)[2. Input E-mail Delivery Settings](#)[3. Map Settings](#)[Input Google Maps API Key](#)[OpenStreetMap Settings](#)[4. Input FTP/SFTP Archive Server Settings](#)[5. Setting up Devices to Report to InControl](#)[Method 1: By Configuring Devices Individually - for Internet Isolated Environments](#)[Method 2: By Configuring or Redirecting Devices from the Peplink InControl - for Internet-accessible Environments](#)[6. Logging Into InControl Appliance Website](#)[7. Importing Devices](#)[8. Creating an Organization, Group, and Adding Devices](#)[9. API Access](#)[10. Your Firewall Settings](#)[11 Data Backup](#)[11.1 Essential Data Backup](#)[11.2 Disk Backup of the DB System](#)[11.2.1 VMware](#)

[11.2.2 AWS](#)

[11.2.3 Hyper-V, GCE, and other virtualization platforms](#)

[12. Upgrading InControl Virtual Appliance](#)

[12.1 Upgrading a system newer than 2.9.0](#)

[12.2 Upgrading a system earlier than 2.9.0](#)

[12.2.1 For VMware ESXi](#)

[12.2.2 For Microsoft Hyper-V and versions prior to 2.9.0](#)

[13. Release Notes](#)

[Release notes for 2.14.1.2](#)

[Release notes for DB-20251229](#)

[Release notes for 2.14.1.1](#)

[Release notes for 2.14.1](#)

[Release notes for 2.14.0.3](#)

[Release notes for 2.14.0.2](#)

[Release notes for 2.14.0.1](#)

[Release notes for 2.14.0](#)

[Release notes for DB-20250520](#)

[Release notes for 2.13.4.5](#)

[Release notes for 2.13.4.3](#)

[Release notes for 2.13.4.1](#)

[Release notes for 2.13.4](#)

[Release notes for 2.13.3.2](#)

[Release notes for 2.13.3.1](#)

[Release notes for 2.13.3](#)

[Release notes for 2.13.2.2](#)

[Release notes for 2.13.2.1](#)

[Release notes for DB-20240711](#)

[Release notes for DB-20240410](#)

[Release notes for 2.13.2](#)

[Release notes for 2.13.1.2](#)

[Release notes for 2.13.1](#)

[Release notes for 2.13.0.2](#)

[Release notes for 2.13.0.1](#)

[Release notes for 2.13.0](#)

[Appendix 1: Procedure for preparing the data for setting up “Sign in with Apple”.](#)

[Appendix 2: Procedure for setting up authentication with Okta](#)


1. Virtual Appliance

1.1 Introduction

InControl 2 Virtual Appliance runs on top of a virtualization server. VMware ESXi and Microsoft Hyper-V are supported. For cloud services, Amazon Cloud Service and Google Cloud Platform are supported.

The system consists of two VMs (Virtual Machines), namely IC (InControl) VM and DB (database) VM.

For VM systems, the setup requires two Virtual Switches in the virtualization server. One is for internal communication between the InControl VM and the DB VM. Another one is for web access and device communication from the outside.

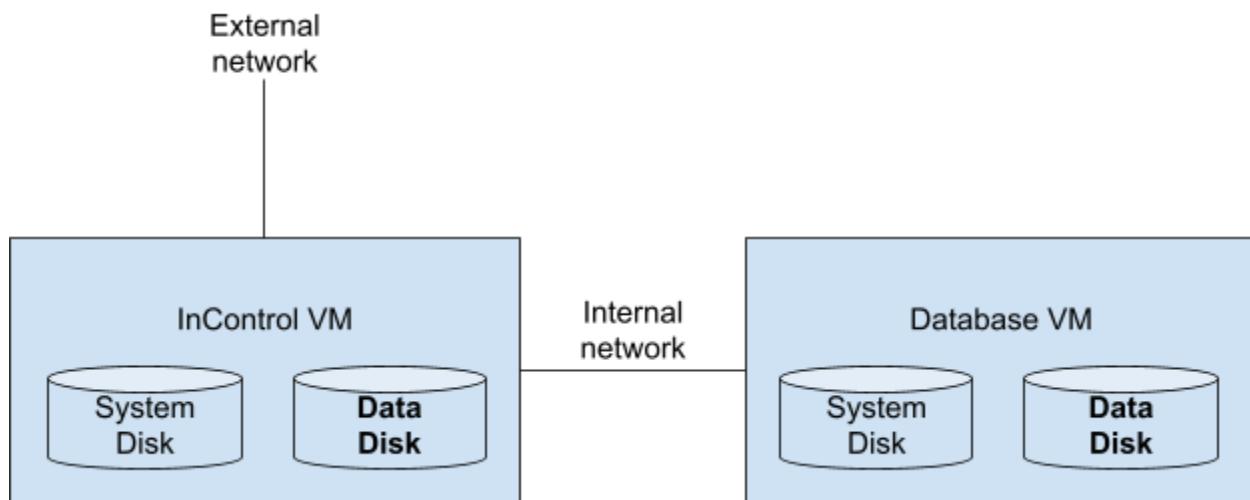

1.2 Hardware Requirements

For up to 100 devices

	InControl VM	Database VM
CPU	Dual-core minimum. Quad-core preferred	
Memory Size	12 GB	8 GB

AWS EC2 Instance Type	r6i.large	r6i.large
System Disk Size	24 GB	24 GB
Data Disk Size	20 GB	100 GB

For up to 1000 devices

	InControl VM	Database VM
CPU	Quad-core 3.4 GHz Xeon	
Memory Size	24 GB	12 GB
AWS EC2 Instance Type	r6i.xlarge	r6i.xlarge
System Disk Size	24 GB	24 GB
Data Disk Size	30 GB	1 TB

For up to 5000 devices

	InControl VM	Database VM
CPU	16-core 3.4 GHz Xeon	
Memory Size	96 GB	32 GB
AWS EC2 Instance Type	r6i.4xlarge	c6i.4xlarge
System Disk Size	24 GB	24 GB
Data Disk Size	40 GB	5 TB

The minimum memory requirement is 12 GB for the InControl VM. Systems with memory less than 8 GB are not recommended. The system stability and performance may be affected.

Important: The actual system requirement depends on not only the number of devices but also the devices' functionality and usage. E.g. GPS data availability, the number of cellular WANs, the number of client connections per hour, etc. The resource requirements for MAX models tend to be higher than those for Balance and AP One models. The above requirement figures are for average usage.

External archive server:

- An FTP or SFTP server: as much storage as possible. Please see chapter [4. Input](#) [FTP/SFTP Archive Server Settings](#) for details.

1.3 Installation on VMware ESXi

Compatibility

The installation images have been verified to be working on VMware ESXi 6.7 and 7.0. ESXi 6.5 is not supported.

Networking

Please create two vSwitches namely "WAN" and "Internal".

The "WAN" is for connecting to the outside world and will need a physical network adapter attached. The first network adapter of the InControl VM shall be assigned to this network.


The "Internal" is for inter-InControl-DB communication, no physical adapter is needed. The second network adapter of the InControl VM and the single network adapter on the Database VM shall be assigned to this network.

Note 1: A DHCP server is required on the WAN segment during the initial installation. The InControl VM will acquire an IP for its WAN from the DHCP server. You may configure the system with a static IP when you have access to the control panel.

Note 2: As the "Internal" network segment is on the subnet 192.168.1.0/24 by default, the WAN interface cannot be on 192.168.1.0/24 too. You may change the subnet DB VM's "Internal" interface's IP on the console (see chapter [1.9](#)) and change the IC VM's Internal interface IP and the DB server setting on the control panel.

For the ESXi's web console, navigate to "Networking" > "Port groups".

For vSphere client, navigate to ESXi host > Configuration > Networking.

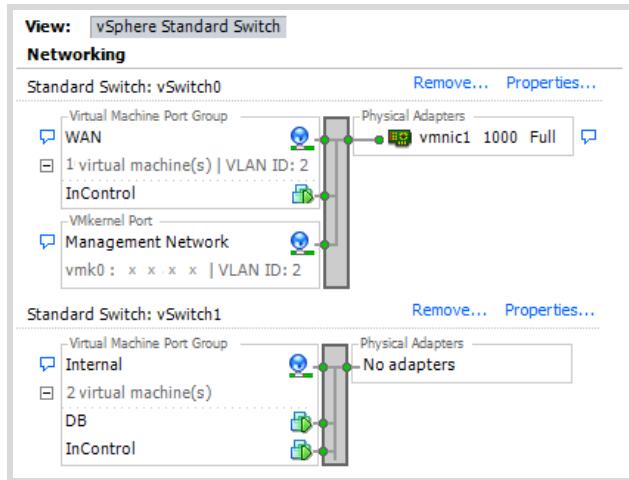

Creating InControl and DB VMs

Step 1. Download the latest Virtual Appliance and Database Server Installation Image file from

<https://www.peplink.com/support/incontrol-appliance-images-downloads/>

Step 2. Extract the downloaded .zip files.

The extracted file names and sizes are as follows:


InControl-System-2.9.4.1-vmware.zip:

File name	Size (Bytes)
InControl IC VM.nvram	8,684
InControl ICA IC VM.ovf	16,136
InControl IC VM-0.vmdk	23,661,537,792
InControl IC VM-1.vmdk	70,144


DB-System-20211215-vmware.zip:

File name	Size (Bytes)
InControl DB VM.nvram	8,684
InControl DB VM.ovf	15,217
InControl DB VM-0.vmdk	22,586,257,408
InControl DB VM-1.vmdk	80,384


Step 3. On the ESXi web console, navigate to “Virtual Machines”. Click the “Create / Register VM” button.

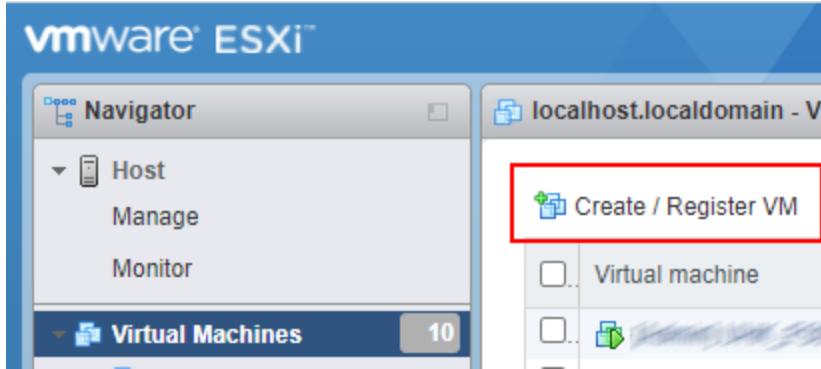


Step 4. Select the creation type “Deploy a virtual machine from an OVF or OVA file”. Click “Next”.

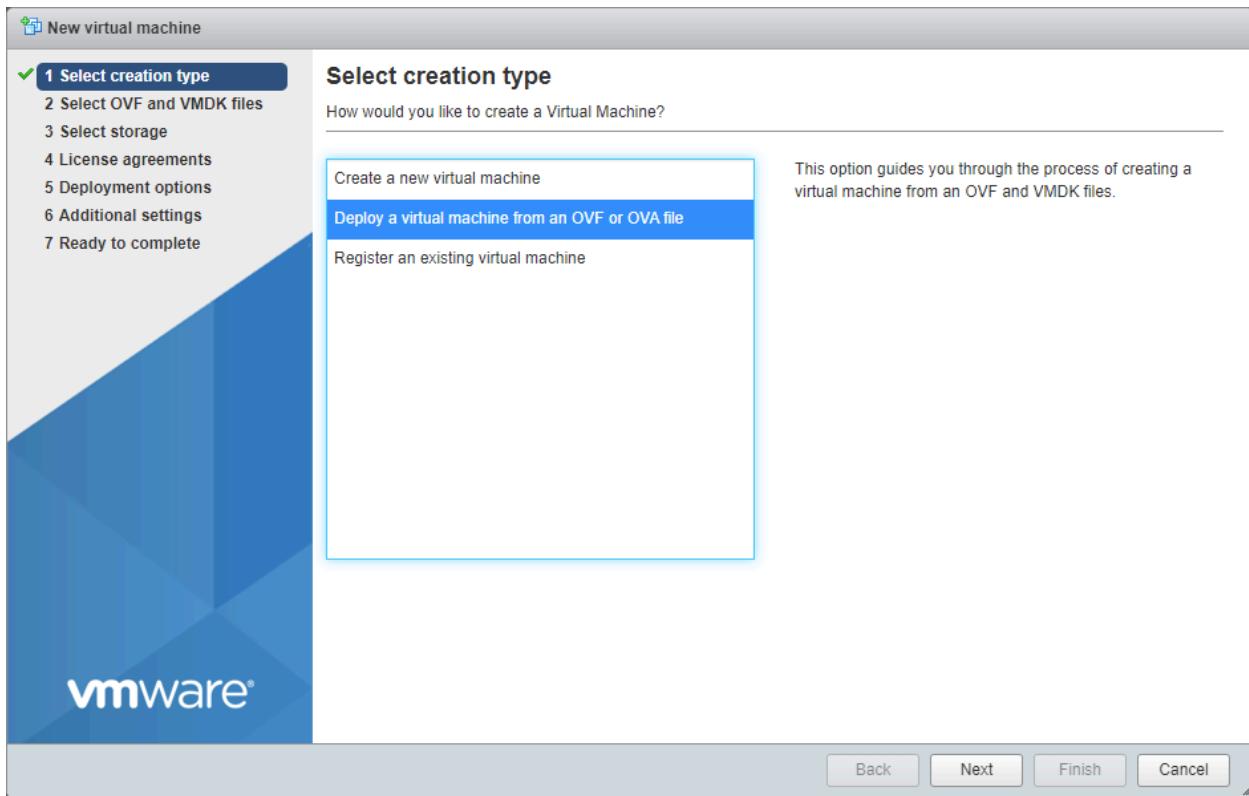


Step 5. Input a name for the virtual machine. E.g. “InControl DB VM”. Drag and drop **all four files** into the drop zone. Click “Next”.

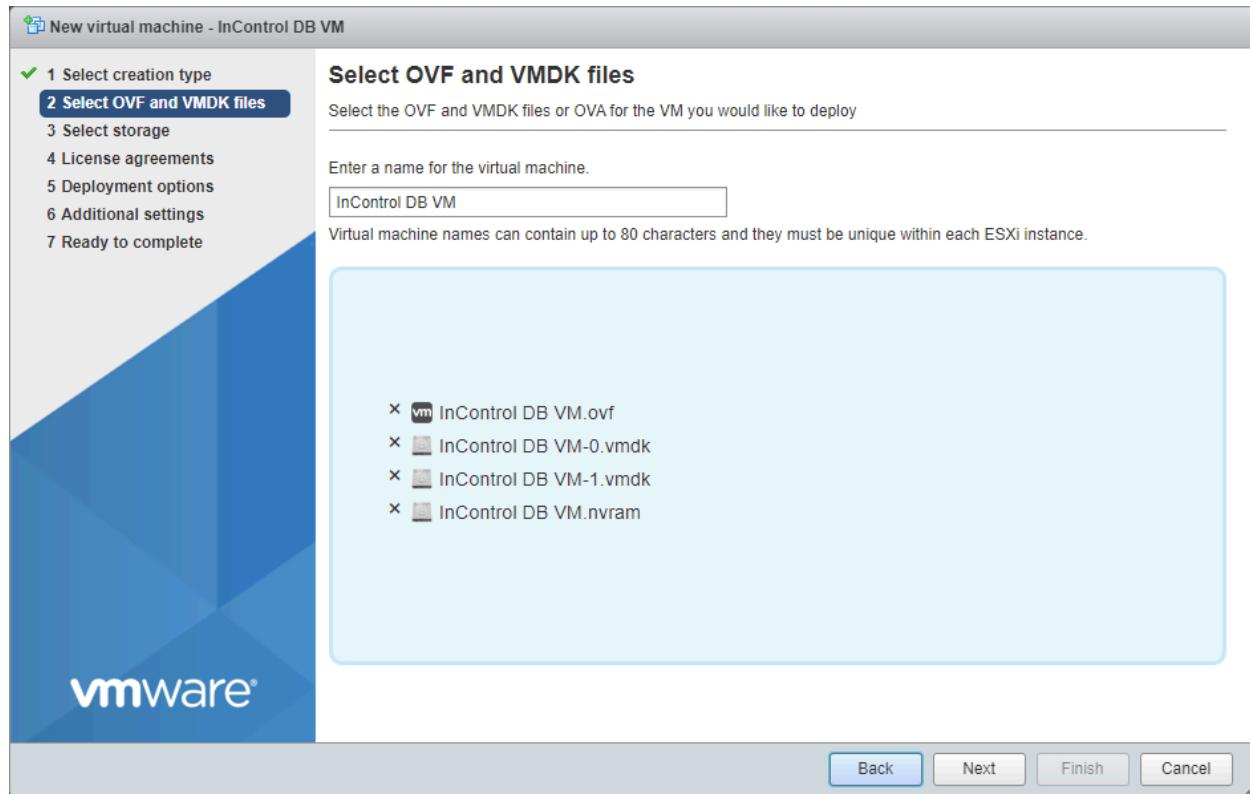

Step 6. Select the storage. Click "Next".

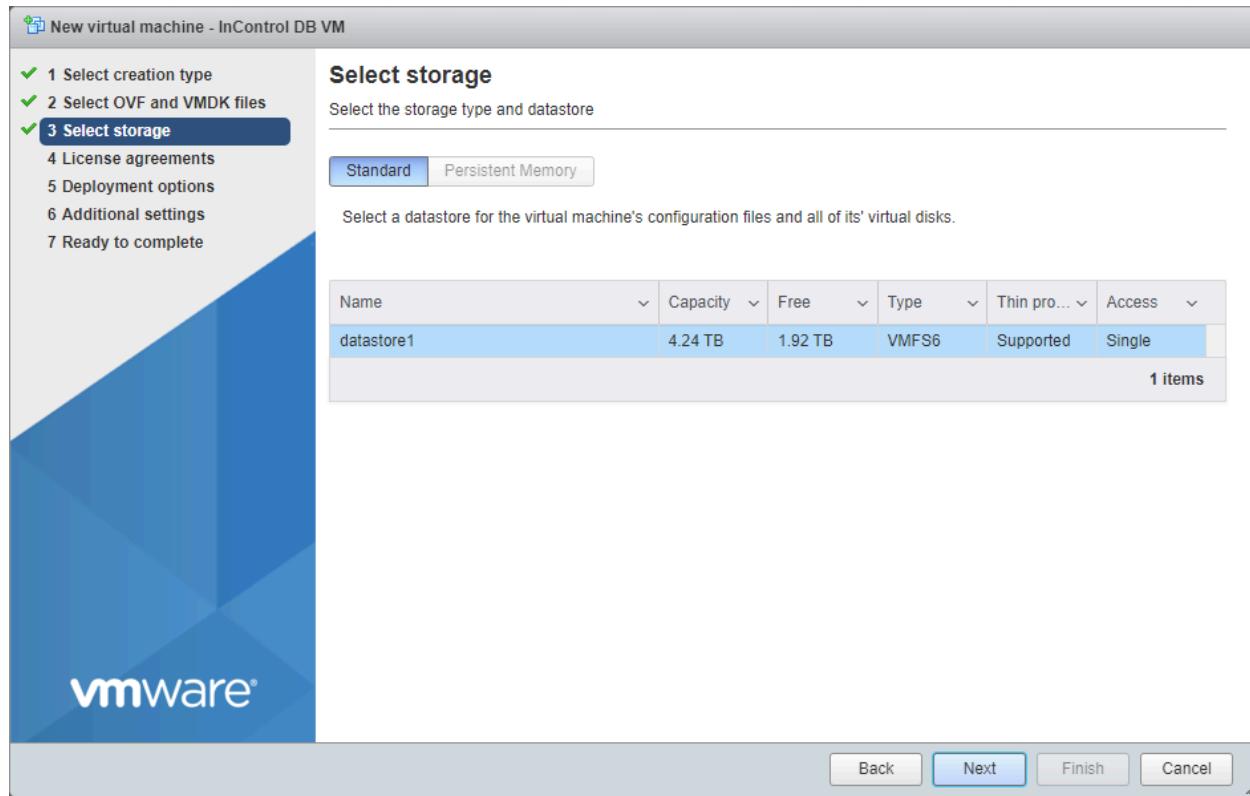


Step 7. In the Network mappings field, choose the network “Internal” that you created earlier. Leave the rest settings intact. Click “Next”.

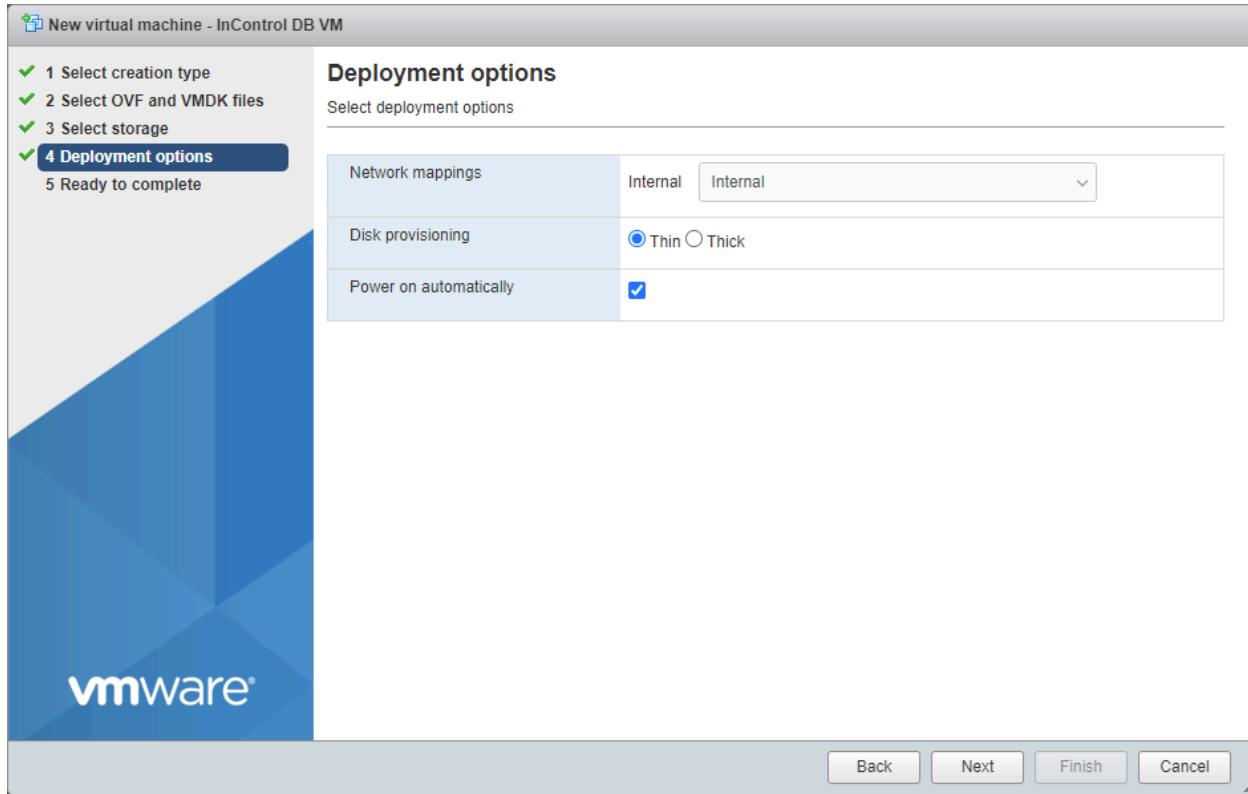

Step 8. Press “Finish”. The files will be uploaded. After the upload completes, the DB VM will start automatically.


Note: You can safely ignore the error message “A required disk image was missing”. The disk will be created automatically when the VM is started.

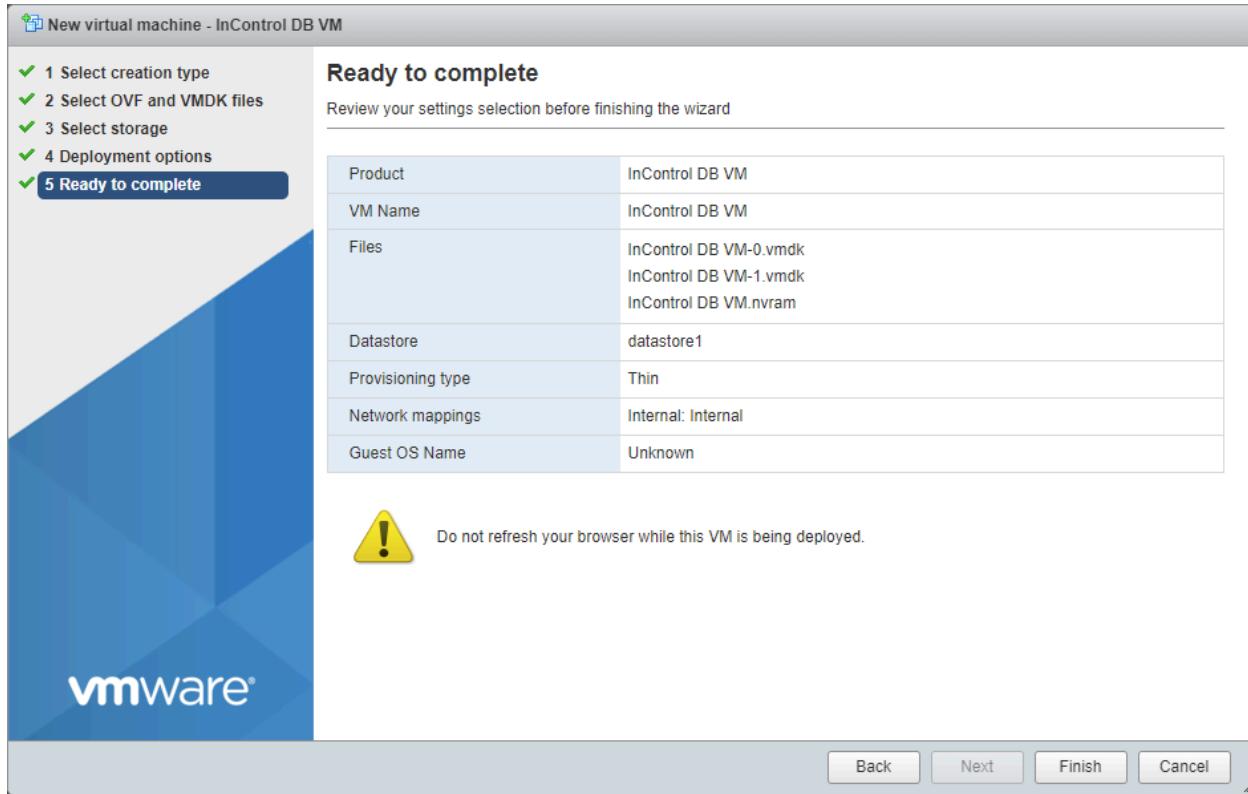

Step 9: Repeat steps 3 to 8 for the InControl VM.

In step 5, input “InControl IC VM” as the name of the virtual machine. Drag and drop **all four files** into the drop zone.

In step 7, choose “WAN” for “WAN”, “Internal” for “Internal”.

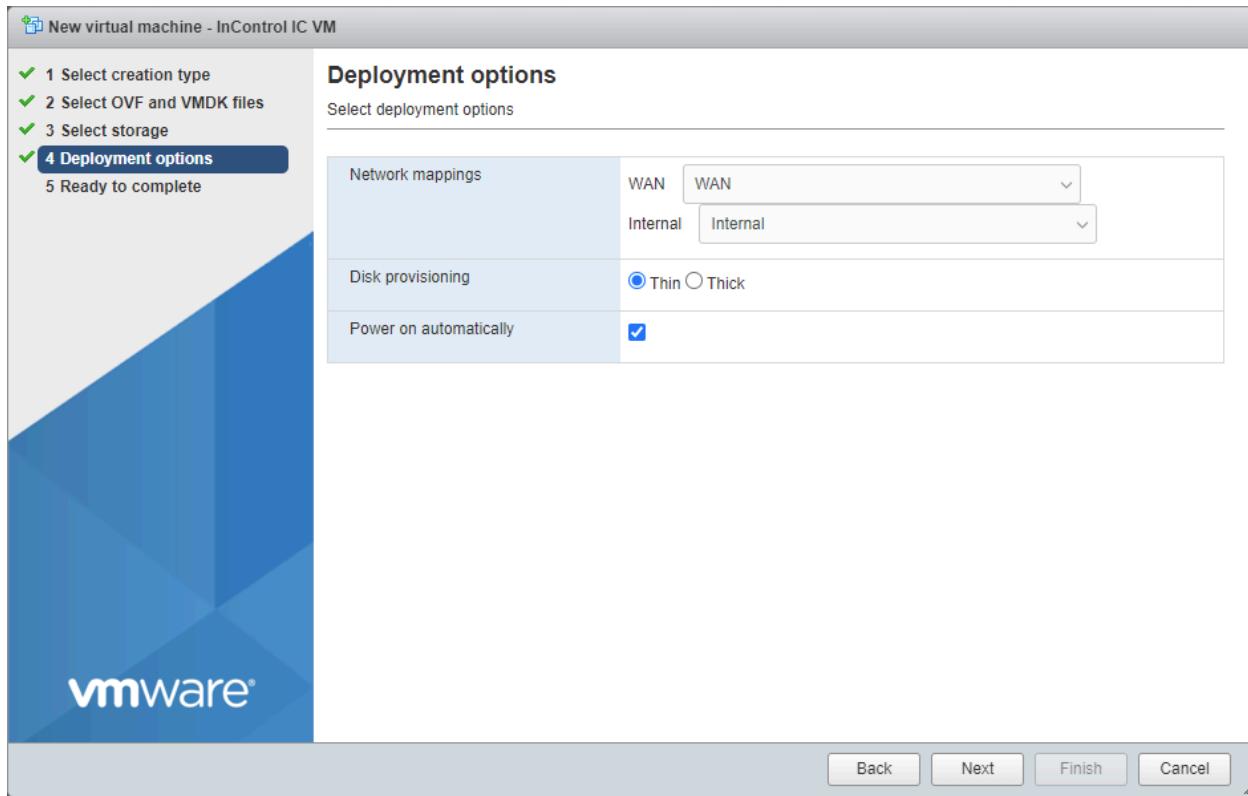

The InControl VM will start automatically when the files are completely uploaded and imported.

1.4 Installation on Microsoft Hyper-V

Networking



First of all, please create two networks on the Hyper-V host.

The first one is called "WAN" which is for connecting to the outside world and will need a physical network adapter attached. The first network adapter of the InControl VM shall be assigned to this network.

The second one is called "Internal". It is for inter-InControl-DB communication, no physical adapter is needed. The second network adapter of the InControl VM and the single network adapter on the Database VM shall be assigned to this network.

Note 1: A DHCP server is required on the WAN segment during the initial installation. The InControl VM will acquire an IP for its WAN from the DHCP server. You may configure the system with a static IP when you have access to the control panel.

Note 2: As the "Internal" network segment is on the subnet 192.168.1.0/24 by default, the WAN interface cannot be on 192.168.1.0/24 too. You may change the subnet DB VM's "Internal" interface's IP on the console (see chapter [1.9](#)) and change the IC VM's Internal interface IP and the DB server setting on the control panel.

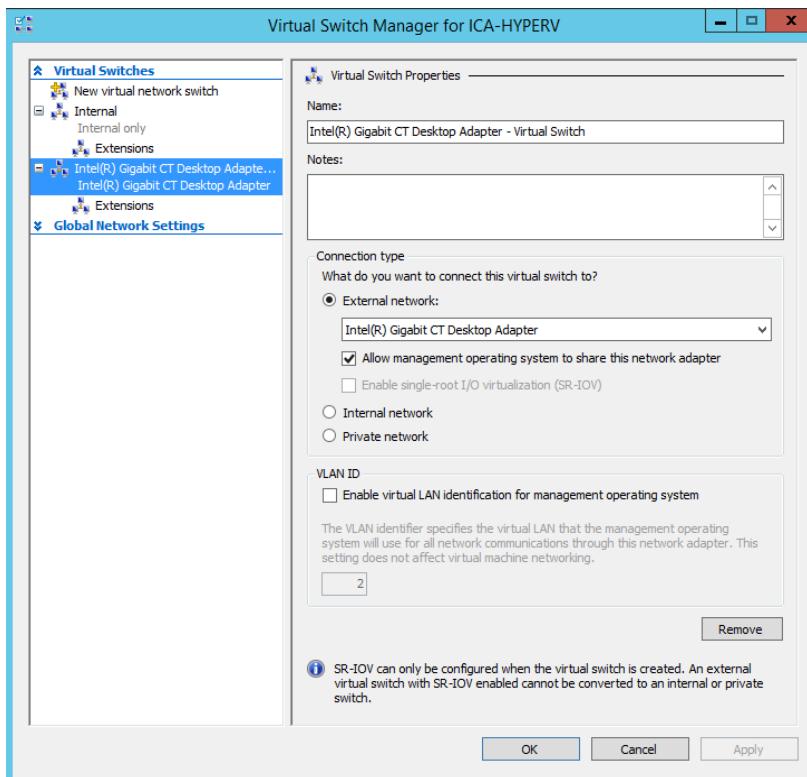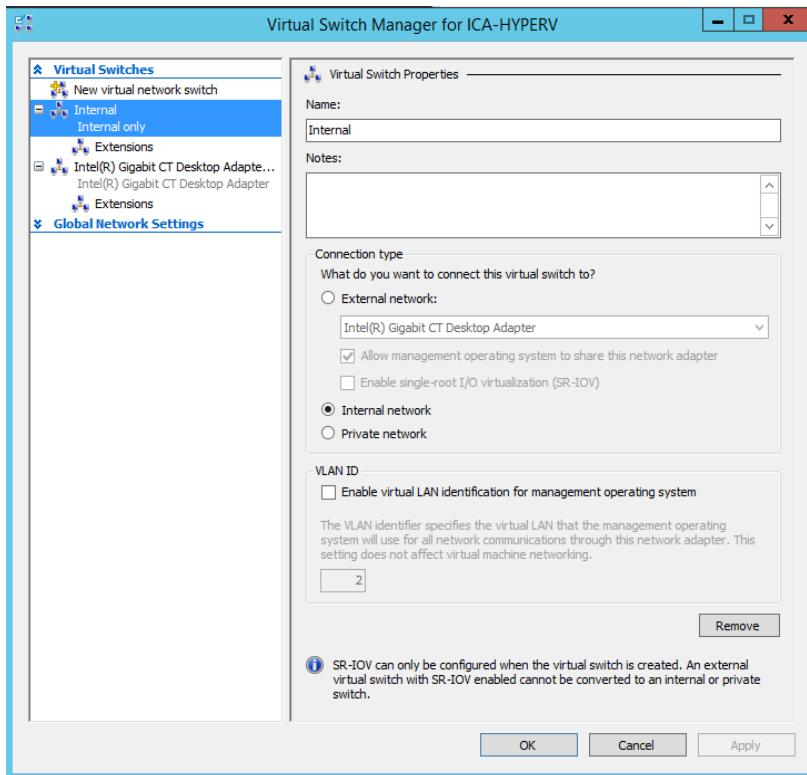

Creating InControl and DB VMs

Peplink publishes two VHDX files: `InControl-System-2.9.0.2.vhdx` and `DB-System-20210323.vhdx`. They are bootable systems of the InControl and database services respectively. You will use them to start one InControl and one Database VM.


Download the latest Virtual Appliance and Database Server image files in `.vhdx` format from



<https://www.peplink.com/support/incontrol-appliance-images-downloads/>

The `.vhdx` file names and sizes are as follow:

File name	Size (Bytes)
<code>InControl-System-2.9.0.2.vhdx</code>	25,035,800,576
<code>DB-System-20210323.vhdx</code>	25,035,800,576

In the Hyper-V Manager, create two new Virtual Machines called `DB` and `InControl` for Ubuntu Linux (64 bit) guest operating systems. Our test was on first-generation VMs. For the DB VM, you need only one network connection on the Internal network. For the InControl VM, you'll need the WAN network and the Internal network.

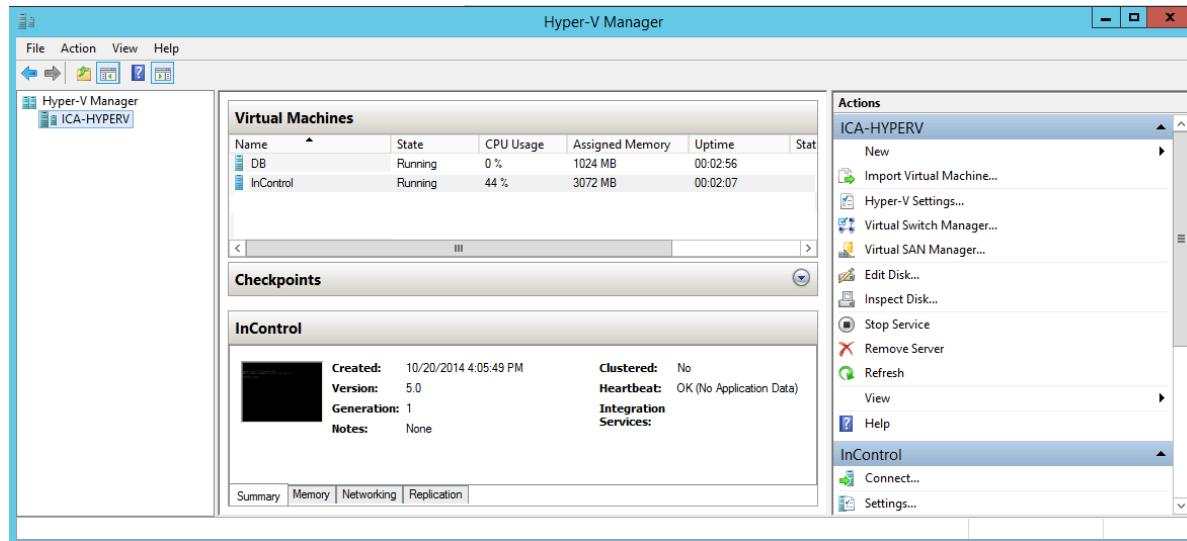


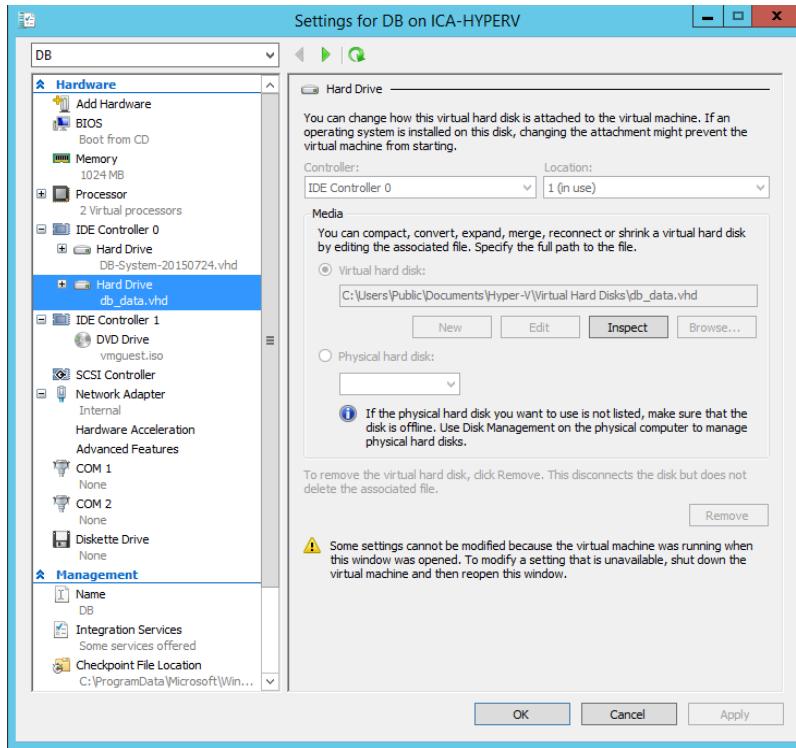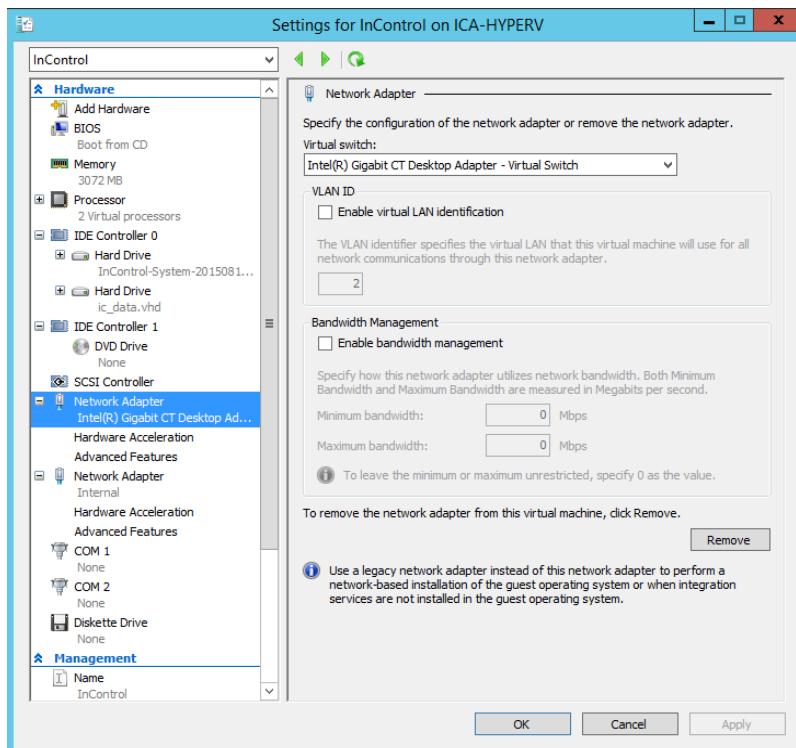DB VM:

InControl VM:


Uploading and Adding data storage to the VMs

For the InControl VM, add the `InControl-System.vhd` on IDE (0:0) and create an empty 20GB disk on IDE (0:1). For the DB VM, follow the same but add 100 GB of disk storage for supporting 100 devices. See [Introduction - Minimum Hardware Requirements](#)

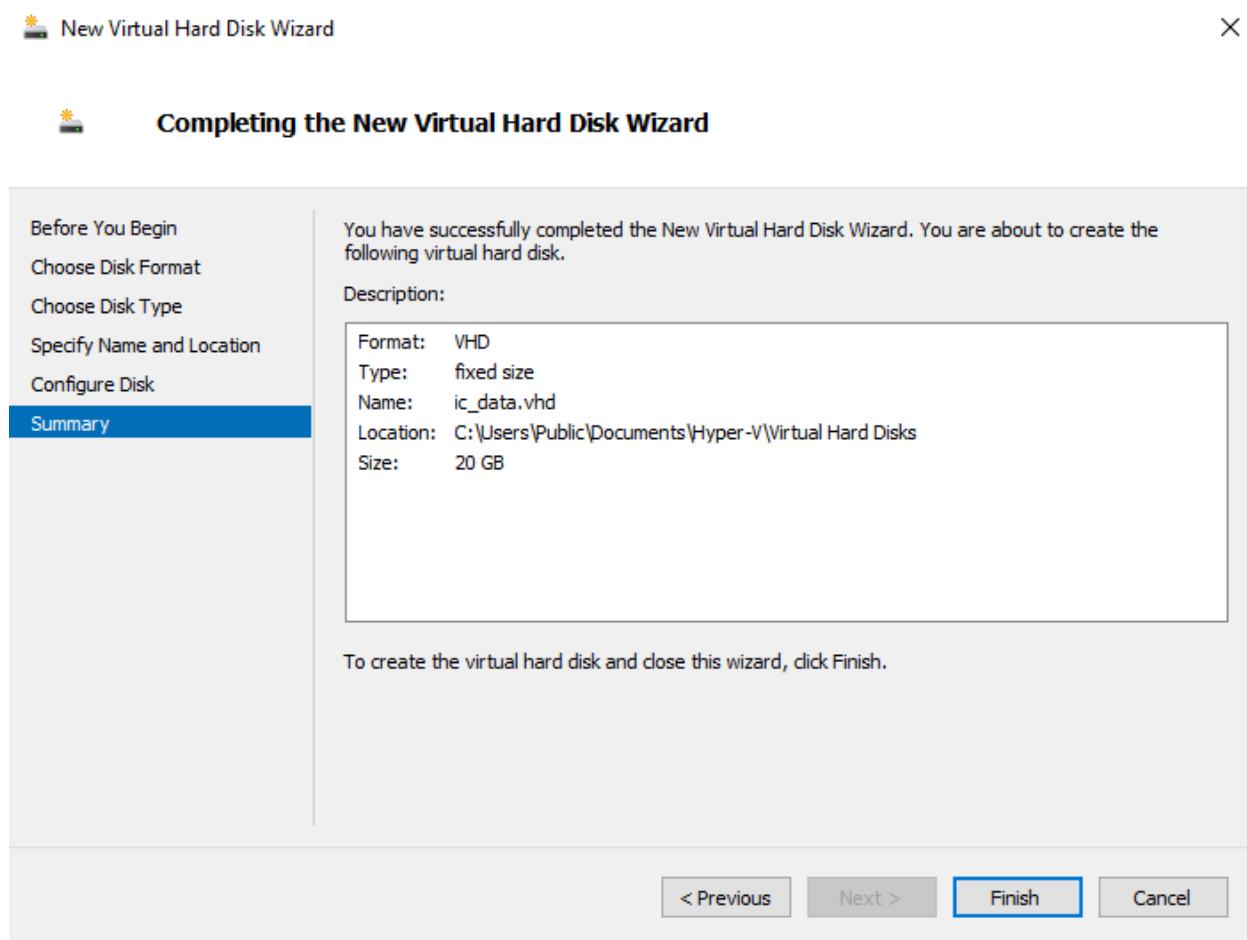Choose VHDX - fixed-size data disks.



After the installation, please perform a firmware update. Please refer to [chapter 11.1](#).

Powering up VMs

Power up the DB VM first. After one minute, power up the InControl VM. They will initialize their attached data disk automatically. The InControl VM takes about 5–10 minutes to start up for the first time, 2 minutes for subsequent boot-ups.


1.5 Installation on KVM on Peplink Edge Computing Platform

Peplink SDX, Balance 2500 EC, EPX with Expansion Module (EXM-LCDT), and MAX HD2/4 MBX with MediaFast support KVM, one of the Edge Computing technology. InControl Virtual Appliance supports running on those models.

Here is the setup procedure.

1. You have to prepare an Ubuntu terminal for managing the KVM on the command line.
2. Log in as root. Run `'apt install qemu-utils and libvirt-clients'` to install the required packages.
3. Create empty data disks by running:
`qemu-img create -f qcow2 DB-Data.qcow2 100G`
`qemu-img create -f qcow2 InControl-Data.qcow2 20G`
where the “20G” and “100GB” are the disks’ sizes. They are good for small setups.
4. Download the two files to your local PC.
5. Download the installation files for KVM in ZIP format from the [download site](#) to your local PC. Extract the files. You will find the files: `icva.xml`, `dbvm.xml`, `InControl-System.qcow2`, and `DB-System.qcow2`.
6. On your local PC, log in to the Peplink device’s web admin with a web browser. Navigate to “System” > “Storage Manager”. Click the first “Configure” button and review the partition settings. Allocate as much space to KVM as possible.
7. Navigate to “Advanced” > “Edge Computing” > KVM, enable KVM, and press “Save”.

8. Click the first “here” link on the page to open the file manager.

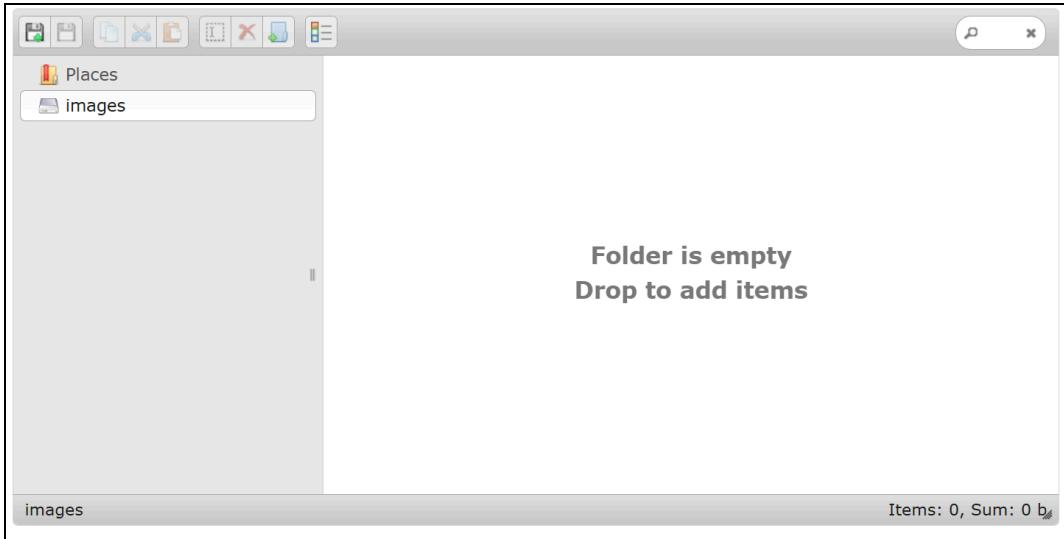

Drag the four `qcow2` files and drop into the empty area of the file manager. Wait until the upload is complete.

9. Navigate to “Network” > “LAN” > “Network Settings”. Create an “Internal” VLAN for inter IC VM and DB VM communications. Click “New LAN” and change the settings as shown below:

LAN

IP Settings

IP Address	192.168.1.10	255.255.255.0 (/24)
------------	--------------	---------------------

Network Settings

Name	Internal
VLAN ID	100
Inter-VLAN routing	<input checked="" type="checkbox"/>
Captive Portal	<input type="checkbox"/>


DHCP Server

DHCP Server	<input type="checkbox"/> Enable			
DHCP Server Logging	<input type="checkbox"/>			
IP Range	Start IP - End IP	255.255.255.0 (/24)		
Lease Time	1 Days 0 Hours 0 Mins			
DNS Servers	<input checked="" type="checkbox"/> Assign DNS server automatically			
WINS Servers	<input type="checkbox"/> Assign WINS server			
BOOTP	<input type="checkbox"/>			
Extended DHCP Option	Option	Value		
No Extended DHCP Option				
Add				
DHCP Exclusion Range	Start IP	End IP	+	
DHCP Reservation	Name	MAC Address	Static IP	+
Save Cancel				


If you change the “VLAN ID” to a number other than 100, you will have to edit the two XML files and replace the string “br_vlan100” with “br_vlanNNN” where NNN is the new VLAN ID.

10. Navigate to “Network” > “WAN”. Assuming that you are connected to the network on “WAN 1” and a static IP address is assigned to it. Click on it to edit its settings. Scroll down to the “Additional IP Address Settings” section, and add a second IP address to it.

This IP address will be for accessing the InControl from the external.

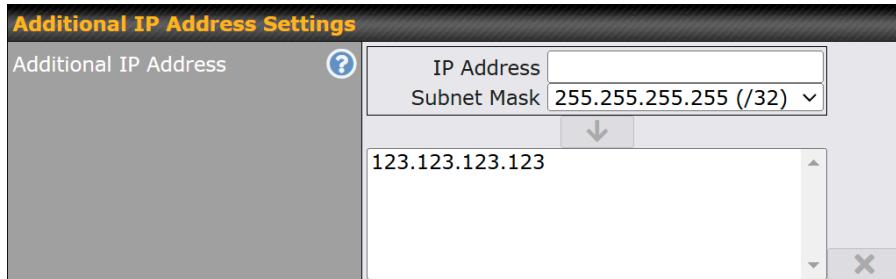

11. Navigate to “Advanced” > “NAT Mappings”. Assuming the IC VM’s internal IP address is 192.168.50.1 on the Untagged LAN. Change the Inbound and Outbound Mapping to its external IP address.

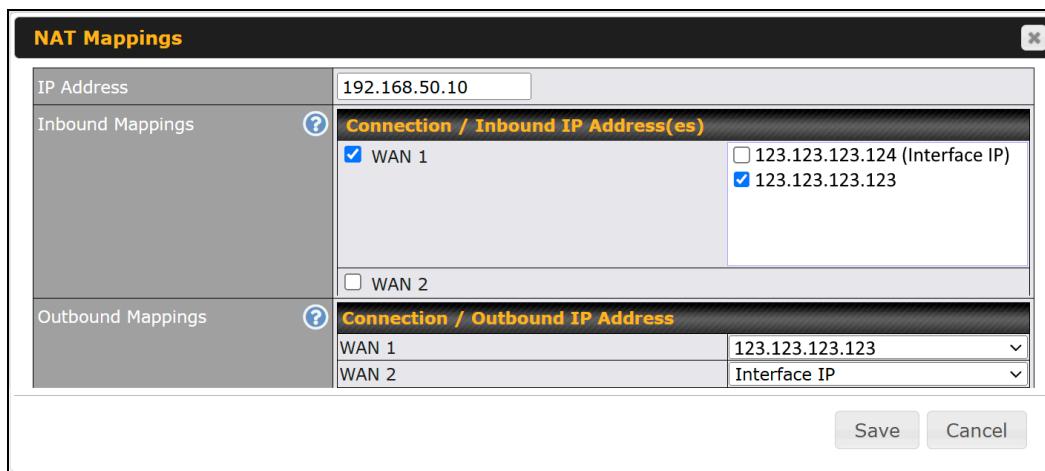

12. Press “Apply Changes”.
13. Transfer the “icvm.xml” and “dbvm.xml” to a directory of your Ubuntu system.
14. At the directory storing the above two files, run the following command to connect to the KVM on the Peplink device and enter into a “virsh” shell:

virsh -c qemu+tcp://**PEPLINK_IP**/system

where the **PEPLINK_IP** is the Peplink device’s LAN or WAN IP address. Enter your “admin” and the web admin password as the “authentication name” and “password” respectively:

```
$ virsh -c qemu+tcp://192.168.1.10/system
Please enter your authentication name: admin
Please enter your password: <web admin password>
Welcome to virsh, the virtualization interactive terminal.

Type: 'help' for help with commands
      'quit' to quit
```

```
virsh #
```

15. At the `virsh` prompt, run `“define dbvm.xml”` and `“define icvm.xml”`.
16. Run `“start dbvm”` and `“start icvm”` to start the two VMs.
17. Start a VNC client on your local PC to connect to the Peplink device’s IP (on the display number) to access the IC VM’s console. Log in to the console with the username and password `“setup”` and `“setup”`. Change the system’s IP address to your desired IP address on the Balance’s LAN subnet.
(The DB VM’s console is also accessible on port 5901 or display number 1.)
18. Log in to the control panel and upgrade the system.

The installation is completed.

1.6 Installation on AWS

1.6.1 Preparing AMIs

1.6.1.1 For general AWS regions

For general AWS regions, you can send an email containing your 12-digit Amazon account number as well as the planned deployment region to ica@peplink.com. Peplink will share two AMIs directly into your AWS account. You will be able to find the AMIs when filtering for ‘Private AMI’ in the AMI page of the corresponding region.

1.6.1.2 For AWS GovCloud

For AWS GovCloud, you should receive two image files, namely

`InControl-System-2.13.2.1.vmdk` and `DB-System-20240711.vmdk` from Peplink.

In order to complete the installation steps, you have to prepare a PC that has [aws-cli](#) installed and is configured to run with your access key ID and secret access key, and with the default region set.

Your account also needs to be able to create and assign IAM roles and policies, create buckets in S3, create and launch EC2 instances, and create a VPC.

Note: The file paths for AWS CLI commands should be specified in full with respect to your OS. E.g.

- Windows: "file:///C:/Users/username/My Documents/trust-policy.json"

- Mac and Linux: "file:///Users/username/trust-policy.json"

Uploading the images to S3 Bucket

Create or use an existing bucket within the same AWS region of your planned deployment. Upload the two disk files to the bucket, saving the bucket name and the file path.

While files are uploading, you may continue to prepare the environment.

Creating the required import role and policy

You will need to import the AMI from your S3 bucket using the `aws-cli`. Firstly, you will need to create the roles. You shall save the following piece of text to a file named ***trust-policy.json*** on your computer.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Principal": { "Service": "vmie.amazonaws.com" },
      "Action": "sts:AssumeRole",
      "Condition": {
        "StringEquals":{
          "sts:ExternalId": "vmimport"
        }
      }
    }
  ]
}
```

Then, run the following command to create the role:

```
aws iam create-role --role-name vmimportpeplink
--assume-role-policy-document "file:///trust-policy.json"
```

(Please change the file path as described above.)

Second, save the following piece of text to a file named **role-policy.json** on your computer. Change the **BUCKETNAME** to match yours:

```
{  
    "Version": "2012-10-17",  
    "Statement": [  
        {  
            "Effect": "Allow",  
            "Action": [  
                "s3:GetBucketLocation",  
                "s3:GetObject",  
                "s3>ListBucket"  
            ],  
            "Resource": [  
                "arn:aws:s3:::BUCKETNAME",  
                "arn:aws:s3:::BUCKETNAME/*"  
            ]  
        },  
        {  
            "Effect": "Allow",  
            "Action": [  
                "ec2:ModifySnapshotAttribute",  
                "ec2:CopySnapshot",  
                "ec2:RegisterImage",  
                "ec2:Describe*"  
            ],  
            "Resource": "*"  
        }  
    ]  
}
```

Then run the following command to create the role.

```
aws iam put-role-policy --role-name vmimportpeplink  
--policy-name vmimportpeplink --policy-document  
"file:///role-policy.json"
```

(Please change the file path as described above.)

Importing the AMI to AWS

Create two files and insert the following content, after changing to correct bucket name:

db.json:

```
[
```

```

{
  "Description": "InControl DB System",
  "Format": "VHDX",
  "UserBucket": {
    "S3Bucket": "YOURBUCKETNAME",
    "S3Key": "DB-System-20240711.vmdk"
  }
}
]

icva.json:
[
  {
    "Description": "InControl IC System",
    "Format": "VHDX",
    "UserBucket": {
      "S3Bucket": "YOURBUCKETNAME",
      "S3Key": "InControl-System-2.13.2.1.vmdk"
    }
  }
]

```

Once your disk images have been successfully uploaded to S3, run the following commands to import the files as AMIs.

```

aws ec2 import-image --disk-containers "file:///db.json"
--role-name vmimportpeplink

aws ec2 import-image --disk-containers "file:///icva.json"
--role-name vmimportpeplink

```

Please change the file paths as described above. Each command will take around 25 minutes to complete. They shall also return an import task ID. You can run the following command with the task ID specified to monitor their import progress:

```

aws ec2 describe-import-image-tasks --import-task-ids
import-ami-IMPORT_TASK_ID

```


1.6.2 Setting up network

InControl Virtual Appliances require to be set up in a Virtual Private Cloud (VPC) for virtual machines to communicate in a secured environment.

If you are going to launch the InControl EC2 instances in an existing VPC, please make sure both the “DNS hostnames” and “DNS resolution” options of the VPC are enabled.

Otherwise, please log in into the Amazon console, open the VPC service, and follow the following instructions:

1. Click the “Create VPC” button.
2. Choose “VPC and more” for the “Resources to create” field.
3. Fill in the VPC settings:
 - a. Fill in a IPv4 CIDR block that you prefer.
 - b. No IPv6 CIDR block is necessary.
 - c. The “Tenancy” can be “Default”.
 - d. The “Availability Zones” can be “1” or above.
 - e. The number of public subnets can be “0”
 - f. The number of private subnets can be “2” or above.
 - g. “NAT gateways” can be “None”.
 - h. “VPC endpoints” shall be “None”.
 - i. **IMPORTANT:** both “DNS hostnames” and “DNS resolutions” options shall be enabled.
4. Press the “Create VPC” button.
5. Once the VPC has been created, record the VPC ID. Click into “Subnets” and search for the newly created subnet(s) by the recorded VPC ID. Click into the subnet that you want to launch InControl instances, click the “Actions” menu, and then click “Edit subnet settings”. Check the “Enable auto-assign public IPv4 address” option and press the Save button.

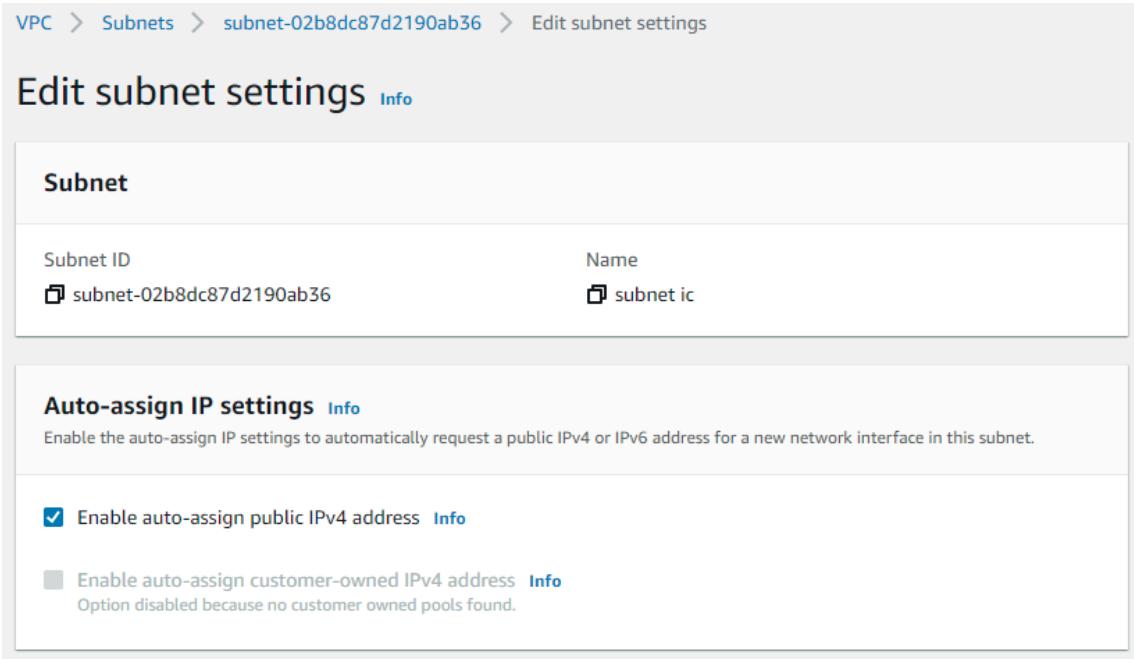

VPC > Subnets > subnet-02b8dc87d2190ab36 > Edit subnet settings

Edit subnet settings Info

Subnet	
Subnet ID	Name
<input type="button" value="subnet-02b8dc87d2190ab36"/>	<input type="button" value="subnet ic"/>

Auto-assign IP settings <small>Info</small>	
Enable the auto-assign IP settings to automatically request a public IPv4 or IPv6 address for a new network interface in this subnet.	
<input checked="" type="checkbox"/> Enable auto-assign public IPv4 address <small>Info</small>	
<input type="checkbox"/> Enable auto-assign customer-owned IPv4 address <small>Info</small>	Option disabled because no customer owned pools found.

6. Navigate to “Internet gateways”. Click the “Create internet gateway” button. Give the gateway a name and click the “Create internet gateway” button. Record the internet gateway’s ID.
7. Select the newly created internet gateway, select the action “Attach to VPC”. Choose the created VPC.
8. Navigate to “Route tables”. For each route table in the VPC, select it, click “Actions” and “Edit routes”. Add a route for the Destination “0.0.0.0/0” to the Internet gateway’s ID.

1.6.3 Setting up security groups

InControl Virtual Appliance requires two security groups, one for the InControl server and one for the Database server. Go to the “Security Groups” tab under “EC2” and click on Create security group.

Create the first security group for the InControl instance. Add the following **inbound rules**. (Note: the last two rules are for UDP protocols.)

Protocol	Port	Source	Description
TCP	4443	Any	Control panel website
TCP	443	Any	InControl website
TCP	2222	Any	Remote assistance (direct)
TCP	80	Any	InControl web redirector
TCP	1443	Any	Remote web admin
TCP	5246	Any	Remote web admin
UDP	5246	Any	Device communication
UDP	53	Any	Find My Peplink DDNS

Create a second security group for the Database instance with the following inbound rules. **Do not forget to change the source with your VPC’s subnet address**:


Protocol	Port	Source	Description
TCP	3306	<i>The VPC’s subnet address</i>	MySQL database
TCP	27017	<i>The VPC’s subnet address</i>	MongoDB
TCP	6379	<i>The VPC’s subnet address</i>	Redis
TCP	22	<i>The VPC’s subnet address</i>	SSH, management
All ICMP (IPv4)	-	<i>The VPC’s subnet address</i>	Troubleshooting

1.6.4 Setting up Route 53 Hosted private zone

Open the Route 53 > “Hosted zone”. Click on **Create a new zone**.

Enter **peplink.icva** as the Domain name and select the Private zone option. In the next section, pick the region of your VPC and associate your InControl Virtual Appliance VPC with the private zone.

You can copy the domain name, as it will be used later.

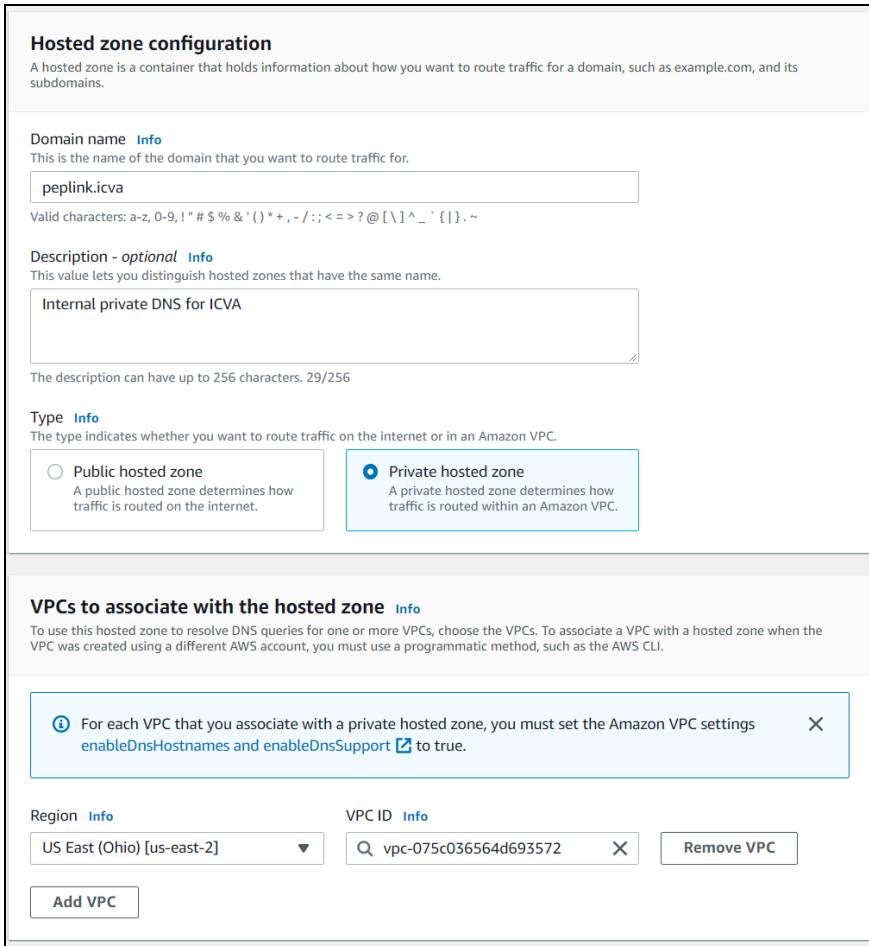

Hosted zone configuration
A hosted zone is a container that holds information about how you want to route traffic for a domain, such as example.com, and its subdomains.

Domain name [Info](#)
This is the name of the domain that you want to route traffic for.
peplink.icva
Valid characters: a-z, 0-9, ! * # \$ % & ' () * + , - / : ; < = > ? @ [\] ^ _ ' { } . ~

Description - optional [Info](#)
This value lets you distinguish hosted zones that have the same name.
Internal private DNS for ICVA
The description can have up to 256 characters. 29/256


Type [Info](#)
The type indicates whether you want to route traffic on the internet or in an Amazon VPC.
 Public hosted zone
A public hosted zone determines how traffic is routed on the internet.
 Private hosted zone
A private hosted zone determines how traffic is routed within an Amazon VPC.

VPCs to associate with the hosted zone [Info](#)
To use this hosted zone to resolve DNS queries for one or more VPCs, choose the VPCs. To associate a VPC with a hosted zone when the VPC was created using a different AWS account, you must use a programmatic method, such as the AWS CLI.

For each VPC that you associate with a private hosted zone, you must set the Amazon VPC settings enableDnsHostnames and enableDnsSupport to true.

Region [Info](#) **VPC ID** [Info](#)
US East (Ohio) [us-east-2]

After creation, click on details and copy the **Hosted zone ID**.



peplink.icva [Info](#)

Hosted zone details

Hosted zone ID
Z0307012209DWNG9W7FTW

1.6.5 Creating a role for Route 53 DNS update and snapshot creation

Navigate to **Identity and Access Management (IAM)** and select **Policies**. Click the **Create Policy** button. Click the **JSON** tab. Paste the following content to the text editor. Replace **HOSTED_ZONE_ID** with the **Hosted zone ID** you copied above.

```
{  
    "Version": "2012-10-17",  
    "Statement": [  
        {  
            "Effect": "Allow",  
            "Action": "ec2:DescribeTags",  
            "Resource": "*"  
        },  
        {  
            "Effect": "Allow",  
            "Action": "route53:ChangeResourceRecordSets",  
            "Resource": "arn:aws:route53:::hostedzone/HOSTED_ZONE_ID"  
        }  
    ]  
}
```

Click **Next: Tags**. Click **Next: Review**. On the **Review policy** screen, put **AutoDNSUpdatePeplink** to the **Name** field. Click **Create policy**.

Click the **Create Policy** button again. Click the **JSON** tab. Paste the following content to the text editor.

```
{  
    "Version": "2012-10-17",  
    "Statement": [  
        {  
            "Effect": "Allow",  
            "Action": [  
                "ec2:CreateSnapshot",  
                "ec2:DescribeVolumes",  
                "ec2:DescribeSnapshots",  
                "ec2:CreateTags"  
            ],  
            "Resource": "*"  
        }  
    ]  
}
```

```
        }  
    ]  
}
```

Click **Next: Tags**. Click **Next: Review**. On the **Review policy** screen, put **AllowSnapshotCreation** to the **Name** field. Click **Create policy**.

Navigate to **Identity and Access Management (IAM)** and select **Roles**. Click the **Create role** button. Choose **AWS service > EC2** and click **Next: Permission**. Select the policies **AutoDNSUpdatePeplink** and **AllowSnapshotCreation** that you just created. Click **Next: Tags**. Click **Next: Review**. On the **Review** screen, put a name, say, **AutoDNSUpdatePeplink**, in the **Role name** field. Click **Create role**.

1.6.6 Launching instances

Please follow the instruction in [chapter 1.6.1](#) to prepare the AMI images in your account. You shall launch a DB instance first and then an InControl instance.

- Navigate to **EC2** and select **AMIs**.
- Select the AMI **DB-System-20240711** for a DB instance (**InControl-System-2.13.2.1** for an InControl instance) and click the **Launch** button
- In the Name field, input “*ICVA InControl*” and “*ICVA Database*” for InControl and DB instance, respectively.
- Click **Add additional tags**. Add the following tags and values respectively for InControl and DB. Replace **HOSTED_ZONE_ID** with the Route 53 private hosted zone ID. You may change the domain “*peplink.icva*” in the **AUTO_DNS_NAME**s to something else.

Important: make sure no trailing space in the keys and values.

DB Instance	
Key	Value
AUTO_DNS_ZONE	HOSTED_ZONE_ID
AUTO_DNS_NAME	db.peplink.icva
Name	ICA DB

InControl instance


Key	Value
AUTO_DNS_ZONE	HOSTED_ZONE_ID
AUTO_DNS_NAME	web.peplink.icva
Name	ICA IC

- In **Instance type**, select “t3.large” or higher where the memory size is at least 8GB.
- In the **Key pair** section, choose “Proceed without a key pair”.
- In Network Settings,
 - choose your **VPC** and **Subnet**.



- **Auto-assign public IP** must be enabled. The IP address is for the instances to make AWS Route 53 API calls to update their DNS records.
- Select the corresponding security group you created earlier.

- In the **Configure storage** section, click **Add new volume**, set size to at least 50 GB.
- Expand the **Advanced details** section.
 - Set the **IAM role** as *AutoDNSUpdatePeplink*.

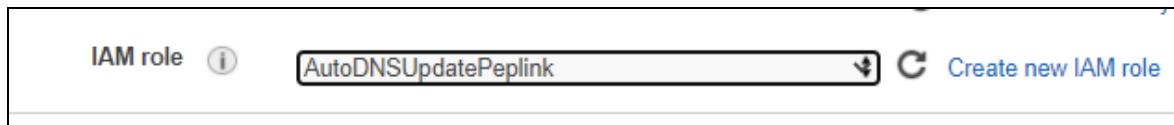

- Set “Enable” and “V2 only (token required)” in the **Metadata accessible** and **Metadata version** fields, respectively.

- Click the **Launch instance** button.

After a DB instance is launched, repeat the steps in this chapter to launch an InControl instance. After both instances are launched, wait around for about 5 minutes. Then you should be able to connect to the control panel:

`https://ICA_public_address:4443`

Please **upgrade the firmware immediately**. You may refer to [chapter 11.1](#).

1.6.7 Associate Elastic IP address

Navigate to **Network & Security > Elastic IPs**. Click the **Allocate Elastic IP address** button. Click the **Allocate** button. An IP address is allocated and selected. Click the **Actions** menu and choose the **Associate IP address** item. In the **Instance** field, type “ICA IC” and choose the ICA IC instance. Click the **Associate** button.

Your ICA's public IP address has been changed to the new elastic IP address. If you have decided on your "server name", you can update its DNS record and point it to the new elastic IP address.

1.6.8 Reset control panel admin password on AWS

In case you forgot your control panel admin password, you can reset it with EC2 instances' "user data" setting. First, stop the InControl instance. Second, once it is stopped, click **Actions > Instance settings > Manage User Data**

In the user data field, add a line as follows:

```
password=yournewpassword
```

Input a password no longer than 16 characters. Press Save and start the InControl instance.

When it is started up, log in to the control panel with the new password once. Stop the instance. Go to "Manage User Data", remove the message from the field, and press Save. Start the instance up again. Now, you have completed the password reset procedure. You can now log in to the control panel with the new password.

1.7 Installation on Google Cloud Platform

1.7.1 Request the disk images

You may email ica@peplink.com to request the disk images for Google Cloud. The disk images are `InControl-System-2.9.0.img` and `DB-System-20210323-gce.tar.gz`.

1.7.2 Uploading the images

Browse to Google Cloud Storage menu and create a new bucket.

Name your bucket and select the planned installation region. All other default settings can be kept.

Choose where to store your data

This permanent choice defines the geographic placement of your data and affects cost, performance, and availability. [Learn more](#)

Location type

Region

Lowest latency within a single region

Dual-region

High availability and low latency across 2 regions

Multi-region

Highest availability across largest area

Location

us-east1 (South Carolina) ▾

Once the bucket is created, open it and upload the downloaded DB and InControl images to it.

1.7.3 Importing the image

Once files are uploaded, browse to Google Cloud Compute Engine, then the Image menu under the Storage section.

Click on Create Image, name the image accordingly and select Source as Cloud Storage file, then select your bucket and the corresponding file. Then select the planned deployment region and click on Create.

Name ?
Name is permanent

Source ?
Cloud Storage file


Cloud Storage file ?
Your image source must use the .tar.gz extension and the file inside the archive must be named disk.raw. [Learn more](#)

 samsbucketpeplink/DB-System-2.9.0-gce.tar.gz

Location ?
 Multi-regional
 Regional

1.7.4 Setting up the firewall

Browse to Networking / VPC Network / Firewall.

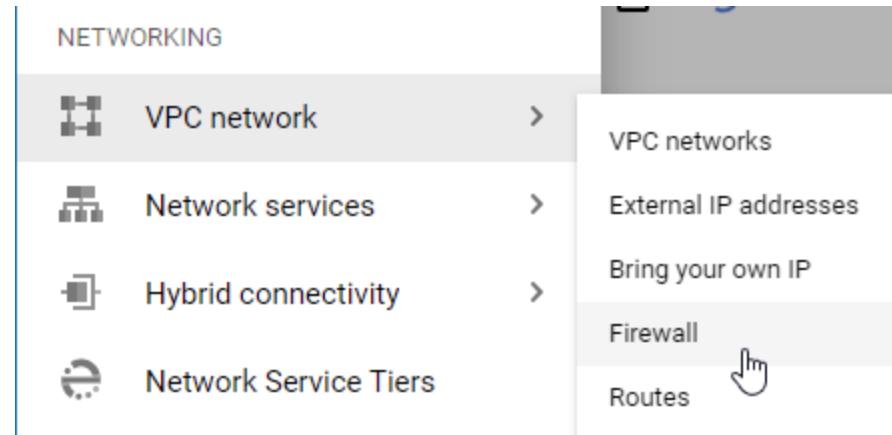

Click on Create Firewall rule:

- Name your first rule “incontrol”
- Add a “Target tags” as “incontrol”
- Add a Source IP range from which your InControl instance will be reachable (e.g.: 0.0.0.0/0)
- Check TCP and paste the following: 80, 443, 2222, 4443, 5246
- Check UDP and paste the following: 53, 5246


- Click on create

Now create a new firewall rule for DB:

- Name your rule “db”
- Add a “Target tags” as “db”
- Add a source IP range corresponding to the IP range of your VPC in the planned deployment region (e.g.: 10.170.0.0/20)
- Check TCP and paste the following: 22, 3306, 6379, 27017
- Click on Create

1.7.5 Creating the instances

Browse to Compute Engine / VM Instances and click on Create Instance.

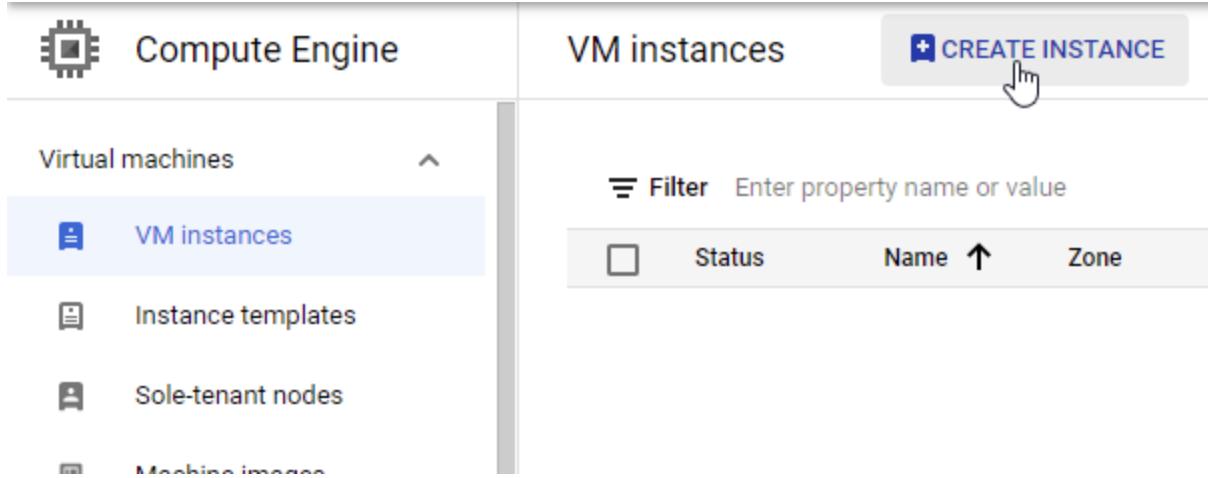

The screenshot shows the Google Cloud Platform Compute Engine interface. On the left, a sidebar menu lists 'Virtual machines' with sub-options: 'VM instances' (which is selected and highlighted in blue), 'Instance templates', 'Sole-tenant nodes', and 'Machine images'. On the right, the main 'VM instances' table is displayed. The table has a header row with columns for 'Status', 'Name' (with an upward arrow icon), and 'Zone'. A 'CREATE INSTANCE' button is located at the top right of the table area, with a hand cursor icon pointing at it. A 'Filter' input field is also visible above the table.

- Name your DB instance “ica-db”
- Select the desired machine configuration

- Under Boot disk section, click on Change and browse to Custom Images, select your project and the DB image then click on Select

Boot disk

Select an image or snapshot to create a boot disk; or attach an existing disk. Can't find what you're looking for?

Public images	Custom images	Snapshots	Existing disks
---------------	----------------------	-----------	----------------

Show images from
My First Project

Show deprecated images

Image
db

Created on Feb 24, 2021, 11:57:30 AM

Boot disk type	Size (GB)
Balanced persistent disk	25

- Expand the “Networking, disks, security, management, sole-tenancy” menu
 - ▼ NETWORKING, DISKS, SECURITY, MANAGEMENT, SOLE-TENANCY**
- Browse to Networking section
 - Add “db” as Network tag
 - In the Network interface section, edit the network interface:
 - Under Primary Internal IP, select Reserve Static IP Internal Address
 - Select Let Me Choose under “Static IP address” and input the desired IP for db instance

- Under External IP, select “None”

Network interfaces

Network interface is permanent

Edit network interface 

Network *	default 
Subnetwork *	default (10.138.0.0/20) 
Primary internal IP	db (10.138.0.3) 
Alias IP ranges	
+ ADD IP RANGE	
External IP	None 

DONE

- Click on Done
- Browse to the Disks section and add a new disk. Name it “ica-db-data”. Input size of 20 GB or above. Click Done.
- Click Create

Now create another new instance for the InControl:

- Name your instance (e.g.: incontrol)
- Select the desired machine configuration
- Under Boot disk section, click on Change and browse to Custom Images, select your project and the InControl image then click on Select
- Expand the “Networking, disks, security, management, sole-tenancy” menu
- Browse to Networking tab


- Add “incontrol” as Network tag. Add your InControl target DNS name:

Hostname 

Set a custom hostname for this instance or leave it default. Choice is permanent

- Under Network interfaces, edit the network interface
 - Under Primary Internal IP, select Reserve Static IP Internal Address
 - Select “Let Me Choose” under “Static IP address” and input the desired IP for InControl instance
 - Under External IP, select either Create IP address or assign the desired existing IP address.

■ Press Done.

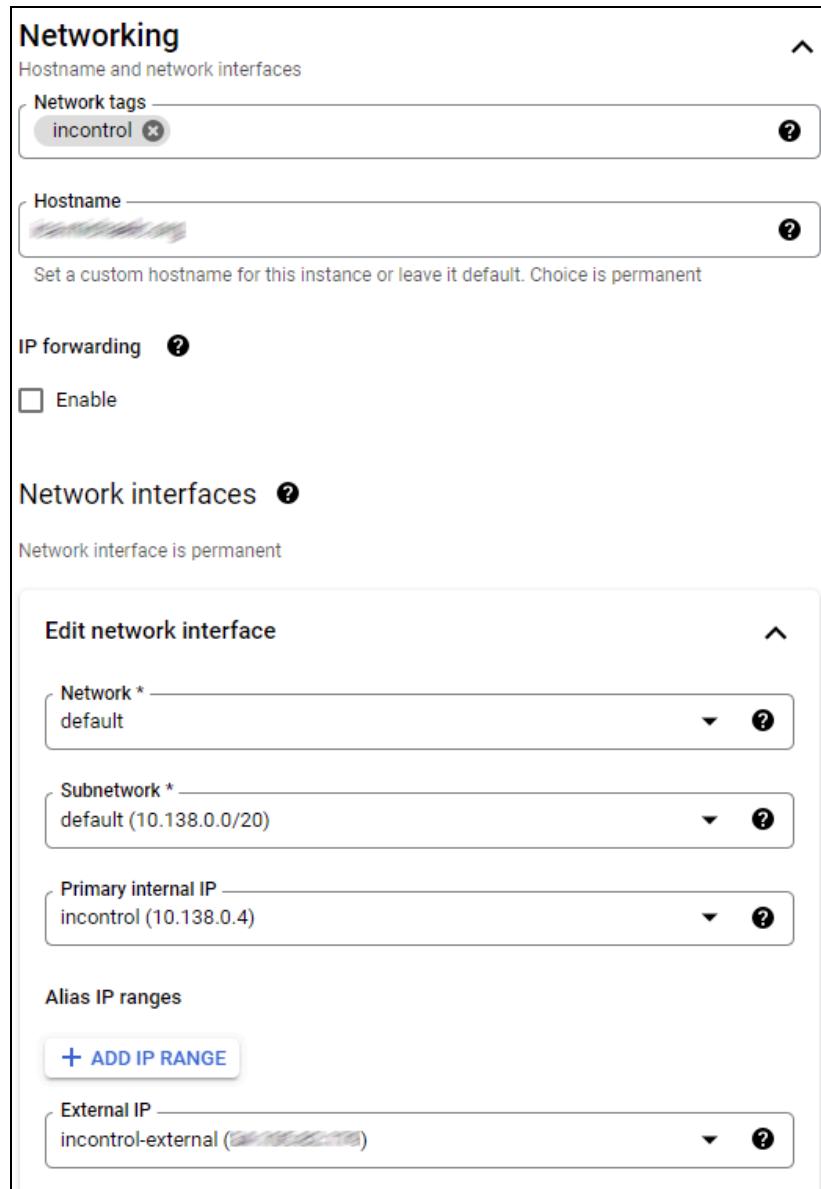

Networking
Hostname and network interfaces

Network tags
incontrol

Hostname
Set a custom hostname for this instance or leave it default. Choice is permanent

IP forwarding

Enable

Network interfaces

Network interface is permanent

Edit network interface

Network *

Subnetwork *

Primary internal IP

Alias IP ranges

+ ADD IP RANGE

External IP

- Browse to the Disks section and add a new disk. Name it “ica-ic-data”. Input size of 20 GB or above. Click Done.

- Under the Management tab, add a Metadata with the following key: “db” and the reserved private IP address of your DB instance as value.

Metadata

You can set custom metadata for an instance or project outside of the server-defined metadata. This is useful for passing in arbitrary values to your project or instance that can be queried by your code on the instance. [Learn more](#)

Key *	Value
<input type="text" value="db"/>	<input type="text" value="10.138.0.3"/>

- Click Create.


The system will take about 6 minutes to boot up for the first time if everything is set up correctly.

1.8 Installation on Azure

Throughout this setup guide for Azure, we refer to the new version of Azure portal.

1.8.1 Create the InControl instance

- Sign in to the [Azure Portal](#), navigate to the Azure service “Virtual machines”. Click “+ Create” > “Virtual machine”.

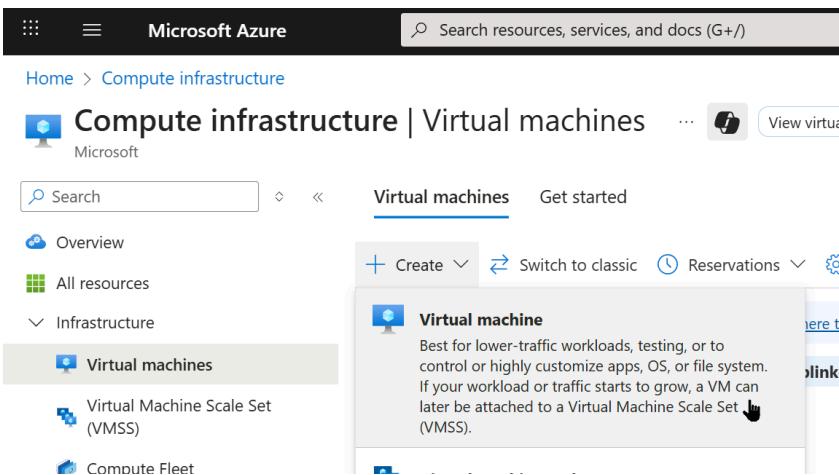


- Project details:** In the “Resource group” field under “Subscription”, click “Create new” and give it a name. E.g. “InControl”.

Tip: You are recommended to create a new resource group rather than choosing an existing one. Some existing resource group's settings might cause conflicts to the setup.

3. Instance details > Basics:

- Enter a “Virtual machine name”, e.g. “ICVA-InControl”.
- Leave the “Region”, “Availability options”, “Zone options”, “Availability zone”, and “Security type” fields unchanged. (A region will be selected after you choose an image.)
- For the “Image” field, click “See all images”, click “Community Images” on the left bar, and type “InControl” in the search box.

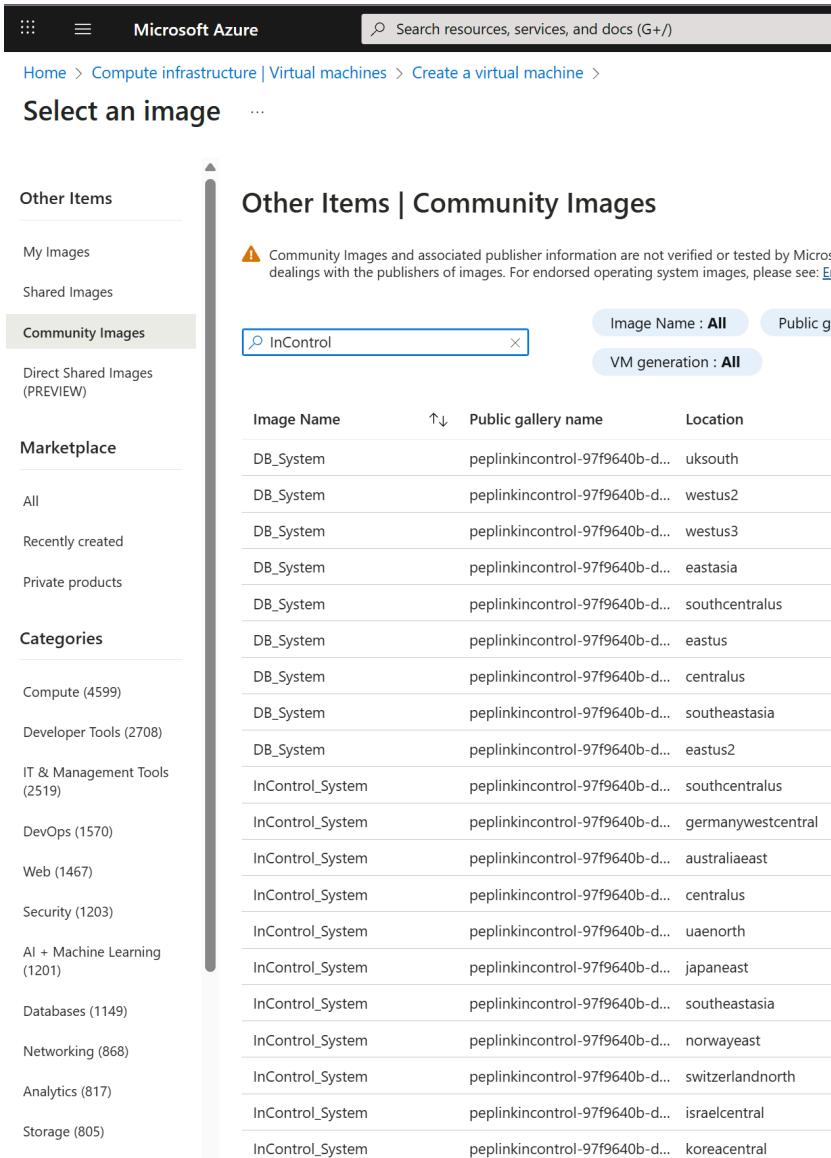

The screenshot shows the Microsoft Azure portal interface for creating a virtual machine. The top navigation bar includes the Microsoft Azure logo, a search bar, and a 'Create a virtual machine' button. The main content area is titled 'Select an image' and shows a search results table for 'Community Images'. The search bar contains 'InControl'. The table has columns for 'Image Name', 'Public gallery name', and 'Location'. The results list multiple entries for 'DB_System' and 'InControl_System' images, each with a different public gallery name and location.

Image Name	Public gallery name	Location
DB_System	peplinkincontrol-97f9640b-d...	uksouth
DB_System	peplinkincontrol-97f9640b-d...	westus2
DB_System	peplinkincontrol-97f9640b-d...	westus3
DB_System	peplinkincontrol-97f9640b-d...	eastasia
DB_System	peplinkincontrol-97f9640b-d...	southcentralus
DB_System	peplinkincontrol-97f9640b-d...	eastus
DB_System	peplinkincontrol-97f9640b-d...	centralus
DB_System	peplinkincontrol-97f9640b-d...	southeastasia
DB_System	peplinkincontrol-97f9640b-d...	eastus2
InControl_System	peplinkincontrol-97f9640b-d...	southcentralus
InControl_System	peplinkincontrol-97f9640b-d...	germanywestcentral
InControl_System	peplinkincontrol-97f9640b-d...	australiaeast
InControl_System	peplinkincontrol-97f9640b-d...	centralus
InControl_System	peplinkincontrol-97f9640b-d...	uaenorth
InControl_System	peplinkincontrol-97f9640b-d...	japaneast
InControl_System	peplinkincontrol-97f9640b-d...	southeastasia
InControl_System	peplinkincontrol-97f9640b-d...	norwayeast
InControl_System	peplinkincontrol-97f9640b-d...	switzerlandnorth
InControl_System	peplinkincontrol-97f9640b-d...	israelcentral
InControl_System	peplinkincontrol-97f9640b-d...	koreacentral

Click “Load more” if needed. Pick an “InControl_System” image that is at your favorite location. If your favorite location is available in Azure but not shown here, please send the location to ica@peplink.com.

- In the “Size” field, click “See all sizes” and choose “D4as_v4” (4 vcpus, 16 GiB memory, 32 GB storage) or above.
- Inbound port rules: Leave the “Allow selected ports” option selected. In the “Select inbound ports” field, enable “HTTP (80)” and “HTTPS (443)”, and disable “SSH (22)”. (We will review the rules later.)
- Licensing: choose “Other” in the “License type” field.
- Click “Next : Disks”

4. Instance Details > Disks:

- OS disk: Leave the “OS disk size” field as “Image default”. Customize the rest field as you wish.
- Data disks: click “Create and attach a new disk”. You can optionally customize the fields. For the Size field, you may choose “32 GiB” or larger. Click “OK”.
- Click “Next : Networking”

5. Instance Details > Networking:

- Virtual Network: you can optionally change the name by clicking “Edit virtual network”.
- Subnet: click “Edit subnet”. In the “Name” field, enter “WAN”. You can optionally change the subnet IP settings. Press “Save”.
- Customize the rest fields optionally.
- Click “Next : Management”.

6. Instance Details > Management, Monitoring, Advanced, and Tags: You can optionally customize the settings. Click “Review + create”.

7. Instance Details > Review + create:

After reviewing the settings, press “Create” and wait until the InControl VM deployment completes. Click “Go to resource”.

8. On the ICVA-InControl VM Overview screen, click the “Stop” button on the top bar.

1.8.2 Create an internal network and attach a second network interface

9. On the left navigation bar, click “Network settings” under “Networking”. Click into the VM’s Virtual network’s detail screen.
10. You should be on a “vnet-xxxxxxxx” screen. On the left navigation bar, click “Address space” under “Settings”. In the “Add additional address range” text box, fill in

“192.168.1.0/24”. Press “Save” on the page's bottom.

The address space for a virtual network is composed of one or more non-overlapping address ranges that is used to simplify address management and avoid overlapping address space. When not using IPAM, it is recommended to use a range defined in RFC 1918 or RFC 6598. [Learn more](#)

Address space	Address range
172.19.0.0/16	172.19.0.0 - 172.19.255.255
192.168.1.0/24	192.168.1.0 - 192.168.1.255
Add additional address range	

11. On the left navigation bar, select “Subnets” under “Settings”. Press “+ Subnet”. Input “Internal” in the “Name” field. In the “IPv4” > “IPv4 address range” field, select “192.168.1.0/24”. Press “Add” on the page's bottom.

Create subnets to segment the virtual network address space into smaller ranges for use by your applications.					
+ Subnet Refresh Manage users Delete					
<input type="text"/> Search subnets					
	Name ↑	IPv4	IPv6	Available IPs	Delegated
<input type="checkbox"/>	snet-[REDACTED]	172.19.0.0...	-	250	-
<input type="checkbox"/>	Internal	192.168.1.0...	-	251	-

12. Navigate to the Home screen and select the “ICVA-InControl” VM. In the left navigation bar, select “Network settings” under “Networking”. With the default network interface selected, in the “Rules” section in the lower half of the screen, you should see “HTTP” and “HTTPS” rules have already been defined. Click the “Create port rule” button to set up the rest inbound and outbound firewall rules as specified in chapter [10. Settings on Your Firewall](#). (By default, outbound accesses are unrestricted. You may keep the outbound rules unchanged in the testing phase.)
13. Click “Attach network interface” on the top bar. Click “Create and attach network interface” in the pop-up. On the Create network interface screen, in the “Network interface” section, input “Internal” in the “Name” field. In the Subnet field, choose “Internal (192.168.1.0/24)”. In the “Private IP address” field, input “192.168.1.5” (IMPORTANT). Press “Create” on the page's bottom.
14. When the second network interface is created, the ICVA-InControl VM has been set up. Leave it stopped. Navigate back to the “Home” page and then “Virtual machines”.

1.8.3 Create the Database instance

15. Click the “+ Create” button at the top bar, and click “Virtual machine”. In the “Resource group” field, choose the resource group (e.g. “InControl”) created in step 2.

16. Instance details > Basics:

- Enter a “Virtual machine name”, e.g. “ICVA-Database”.
- Leave the “Region”, “Availability options”, “Zone options”, “Availability zone”, and “Security type” fields unchanged.
- For the “Image” field, click “See all images”, click “Community Images” on the left bar, and type “InControl” in the search box.
- Pick the “DB_System” image that is at the same location as the first VM.
- In the “Size” field, click “See all sizes” and choose “D2s_v4” (2 vcpus, 8 GiB memory, 8 GB storage) or above.
- Choose “None” for the “Public inbound ports”
- Licensing: choose “Other” for the “License type”.
- Click “Next : Disks”

17. Instance Details > Disks:

- OS disk: Leave the “OS disk size” field as “Image default”. Customize the rest field as you wish.
- Data disks: click “Create and attach a new disk”. You can optionally customize the fields. For the Size field, you may choose “32 GiB” or larger. Click “OK”.
- Click “Next : Networking”

18. Instance Details > Networking:

- Virtual Network: choose the “Virtual network” (VNet) created in step 5. I.e the same VNet as the InControl VM.
- Subnet: select the “Internal” subnet. (Tip: if you don’t see it, you are likely not using a newly created resource group. If so, go back to step 2 and start over again.)
- Public IP: select “None”
- Customize the rest fields optionally.
- Click “Next : Management”.

19. Instance Details > Management, Monitoring, Advanced, and Tags: You can optionally customize the settings. Click “Review + create”.**20. Instance Details > Review + create:**

After reviewing the settings, press “Create” and wait until the Database VM deployment completes. Click “Go to resource”.

21. Ensure the “Private IP address” of the ICVA-Database VM is 192.168.1.4. If not, stop the VM, click the link in the large “Network interface” drop-down menu to enter into the network interface settings screen. In “Settings” > “IP configuration” > “ipconfig1” > “Private IP address settings” > “Allocation”, choose “Static”. Then input “192.168.1.4” as the “Private IP address”. Press “Save”.**22. Navigate back to “Home” and select the ICVA-InControl VM.** On the VM Overview screen, click the Start button on the top bar to start the ICVA-InControl.

After a few minutes, the InControl Virtual Appliance's control panel will be accessible from the Internet. The installation is completed.

1.9 Accessing the Control Panel

After the system is fully started up, which typically takes about two minutes, you can access the Control Panel page on the InControl System via your browser to configure the InControl Virtual Appliance.

Check the InControl IP address from the VM console. You can access the control panel page at `https://\{server_name\}:4443/`. The default username and password are both “**admin**”.

System Control Panel

System Status		
	InControl	Database
Status	Active	DB Online
License	Valid	-
Online Status on Peplink InControl	Online	-
Version	2.9.0.3	N/A
Disk Usage	Total: 19.46 GB Used: 6.55 GB (36%)	Total: 9.99 GB Used: 1.80 GB (19%)

System Settings	
Product	InControl Appliance (Virtual)
Serial Number	[REDACTED]
Server Name	incontrol. [REDACTED]
Company Name	My Company
Service Name	My Company InControl
System Admin E-mail Address	sysadmin@my.domain
Tech Support E-mail Address	support@my.domain
Notification E-mail Sender Name	My Company InControl

After InControl VM is booted up for the first time, please update its firmware immediately. Please refer to [chapter 11.1](#) for the upgrade details. Afterward, input a license key. Then update the server name and other settings.

1.10 IP Address Configuration and Password Reset On the Console

For Hyper-V and VMware installations, you may configure the InControl and Database VM's IP address, and reset the InControl VM's control panel password by logging in to the console. The username and password are "setup" and "setup" respectively. (Note: the console username and password cannot be changed)

InControl VM:

```
InControl 2.8.1
WAN IP address: 10.8.30.104/16

Control panel: https://10.8.30.104:4443/

incontrol login: setup
Password:
Last login: Thu Jun 13 09:25:10 UTC 2019 on tty1

        IP Settings
        =====

[WAN]
Connection Method: Static
    IP Address: 10.8.30.104
    Subnet Mask: 255.255.0.0
    Gateway: 10.8.8.1
    DNS Servers: 10.8.8.1

[Internal]
Connection Method: Static
    IP Address: 192.168.1.1
    Subnet Mask: 255.255.255.0

1: Change IP settings for WAN interface
2: Change IP settings for Internal interface
7: Reset control panel password
9: Abort
Choice:
```

Database VM

```
Ubuntu 14.04.6 LTS DB tty1

DB login: setup
Password:
Last login: Mon Jul 22 03:02:20 UTC 2019 on tty1

        IP Settings
        =====

[Internal]
Connection Method: static
    IP Address: 192.168.1.3
    Subnet Mask: 255.255.255.0

1: Change IP settings for Internal interface
9: Abort/Exit
Choice:
```

1.10.1 How to change the VMs' IP on the Internal network?

By default, the IP addresses of the InControl and database VMs are 192.168.1.1 and 192.168.1.3 respectively. You can change their Internet network IP addresses on the console as described above. But before making the changes, you will have to navigate to the control panel

and update the “Database IP Address” setting first. This settings to tell the InControl VM where the DB VM is.

Database Settings	
Database IP Address	192.168.1.3

1.11 Software License

A software license is required for the InControl virtual appliance to operate. The license ties to the Server Name you use to visit the InControl appliance website. To acquire an evaluation license, please email your Server Name shown on the Control Panel and your order number (if any) to ica@peplink.com. Peplink will send you back a license key. Input it into the License Key field to activate. The device’s serial number will be assigned at the same time.

License	
Server Name	incontrol.my.domain
License Key	<input type="text"/> <input type="button" value="Submit"/>
Max. Allowed Number of Active Devices	50
Expiry Date	n/a

The “Max. Allowed Number of Active Devices” is normally not limited. For legacy licenses, the number is a positive integer.

Managed devices are required to be in-warranty or covered by an InControl subscription in order to appear online and be manageable. If the system is firstly installed or upgraded to 2.9.0 or above, the system will enter into a 7-day grace period. Within the period, device expiry date checks are not enforced. Devices could appear online as soon as they are reporting to the system. After the period, any number of within-warranty devices could be managed so long as the system’s maximum resource capacity has not been reached.

For systems with a legacy license, when the license usage reaches 100%, no more devices could appear online even if they are under warranty or subscription.

1.12 Automatic Synchronization of Service Expiration Records

Since version 2.9.0, the InControl Appliance automatically synchronizes devices' service expiration records with Peplink InControl on the Internet every six hours. This ensures the appliance maintains up-to-date warranty, subscription, and PrimeCare date records.

Additionally, the following data is synchronized at the same time:

- Device Feature Add-on activations
- New product and model definitions
- Firmware releases
- Captive portal default certificates

Device Expiration Date Synchronization

InControl Appliance system regularly attempts to connect to Peplink InControl public cloud and synchronize devices' warranty, subscription, and PrimeCare expiration dates. If this InControl Appliance is not connected to the Internet, or you want to initiate a synchronization manually, you can click the button below.

Synchronize

Last synchronized: 2021-03-04 08:53:11 GMT+0

1.12.1 Synchronization via External Computer with Internet Connectivity

If the system is unable to access the Internet directly, system administrators can synchronize the data via a browser from a computer that has Internet connectivity and is able to reach the InControl Appliance. To do this:

1. Visit the appliance's MSP-level Device Management page at
`https:// {SERVER_NAME} /r/msp/device_management`
2. Click the **Synchronize** button in the "Device Expiration Date Synchronization" section.

When the web browser has Internet access and can reach Peplink InControl, clicking the **Synchronize** button will automatically complete the synchronization process.

1.12.2 Fully Offline Synchronization

If the system is entirely offline and the web browser cannot access the Internet, follow these steps:

1. Visit the appliance's MSP-level Device Management page at
`https:// {ICA_Address} /r/msp/device_management`.
2. The page will display on-screen instructions, prompting you to copy encrypted messages from the ICVA.
3. Paste the copied message into an InControl page (using remote desktop, email, etc.).

4. The InControl page will generate another encrypted message for you to copy.
5. Paste this message back into the ICVA page to complete the synchronization process.

If the system does not have an Internet connectivity to reach the Peplink InControl, whenever any devices' service contract has been renewed in Peplink, system administrators will be required to perform data synchronization manually by visiting the appliance's MSP-level Device Management page (https://{} SERVER_NAME /r/msp/device_management) and clicking the Synchronize button in the "Device Expiration Date Synchronization" section.

2. Input E-mail Delivery Settings


To create new accounts, the system has to be able to send confirmation emails to do account confirmation. So please configure the SMTP server settings, as well as the "Notification E-mail Sender Name" and "Notification Sender E-mail Address" in the System Settings above accordingly.

E-mail Delivery Settings	
SMTP Server	<input type="text" value="smtp.my.domain"/>
SMTP Port	<input type="text" value="587"/>
SMTP Username	<input type="text" value="smtp-user"/>
SMTP Password	<input type="password" value="....."/>
SMTP Authentication	<input type="button" value="Login (default) ▾"/>
SMTP TLS Encryption	<input type="button" value="Enabled (default) ▾"/>
SMTP HELO Domain	<input type="text" value="mydomain.com"/>
Testing E-mail Address	<input type="text"/> <input type="button" value="Test"/>
Testing E-mail Delivery Status	<i>Note: Save E-mail Delivery Settings before testing.</i>

3. Map Settings

Input Google Maps API Key

By default, the maps showing on the system are served by a Peplink managed OpenStreetMaps system. If you want to use Google Maps instead, you are required to apply an API key from Google, add billing information to it, and input the API key to InControl Appliance's control panel page. If a key is not provided, a screen like this may be displayed:

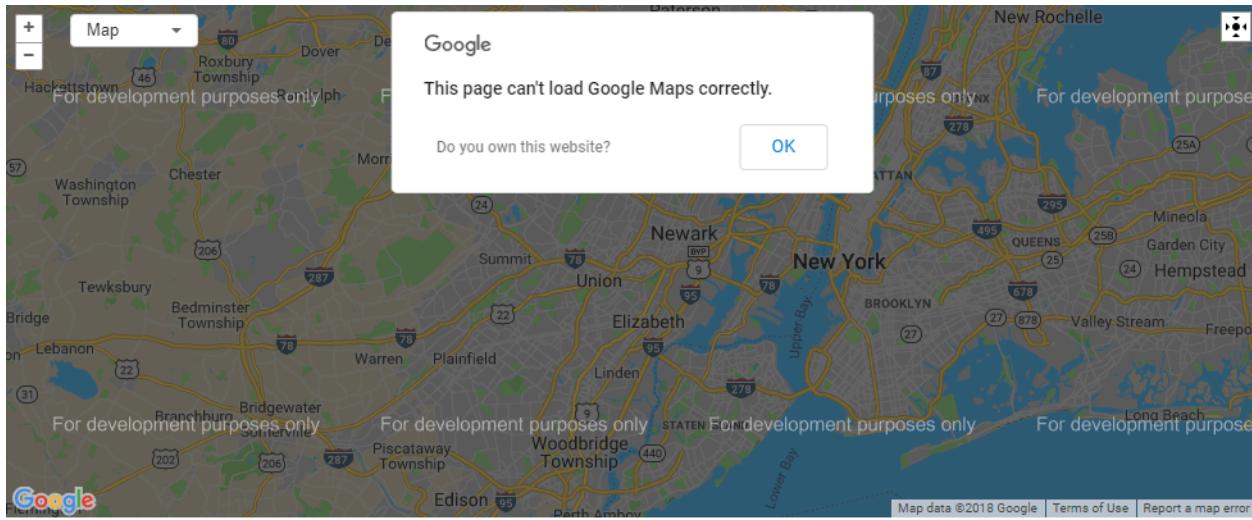

Please follow the instructions shown on the Google Maps API Key Settings panel to apply for an API key.

Maps Settings	
Google Maps API Key	<input type="text"/> Note: To register for a Google Maps API Key: - Sign in Google Cloud Platform , create a new project named "InControl Appliance". - Navigate to APIs & Services > Dashboard . - Click the link ENABLE APIs AND SERVICES at the top of the page. - Choose and enable both Maps JavaScript API and Geocoding API . - Navigate to APIs & Services > Credentials > Create credentials . Choose API key for the Application type . - Finally, add billing information to the project by following the instructions on this site .
OpenStreetMap Tile Server URL Prefix	<input type="text"/> https://osm.peplink.com/tiles /{z}/{x}/{y}.png
OpenStreetMap Nominatim Server URL	<input type="text"/> https://osm.peplink.com/geocode

If you do not want to use Google Maps, you may choose to display maps with the OpenStreetMap. The setting is available at Organization Settings.

OpenStreetMap Settings

When you choose to use OpenStreetMap, the mapping images and geocoding requests will be served by Peplink's OpenStreetMap servers by default. You could change to using your servers by inputting the server URLs to the *OpenStreetMap Tile Server URL Prefix* and *Nominatim Server URL* fields.

4. Input FTP/SFTP Archive Server Settings

As a relational database is not good at storing bulky data, historical event log events, GPS locations, and cellular signal data are only kept in the MySQL database for 5 days. Before they are removed from the database, the system will archive the data to the archive server daily if an FTP or SFTP server is configured.


When the data is requested over the web or API, the system will automatically choose to retrieve the data from the database or the archive server and return it to the user or API client. So you are encouraged to set up an FTP/SFTP archive server for storing those historical data.

Below are data retention periods of various types of data:

Data	Retention period	
	without archive server	with archive server
Per-minute device usage	14 days	
Hourly device usage	2 days	
Hourly client usage	1 month	
Daily client/device usage	60 days	
Monthly device usage	2 years	
Device online/offline history	6 months	
Social network user data	2 years	
Operation log	2 years	
Event log	30 days	1 year
GPS data	5 days	1 year
WAN Quality / Cellular reports	5 days	6 months

5. Setting up Devices to Report to InControl

Unlike SNMP, Peplink devices initiate InControl management communication with the server. The device speaks to InControl at least every 28 secs to maintain a session. With such a design, devices could set up a two-way communication channel with InControl even if they are behind a NAT router. The communications are over UDP port 5246 (for general communication) and TCP port 5246 (for Remote Web Admin only).

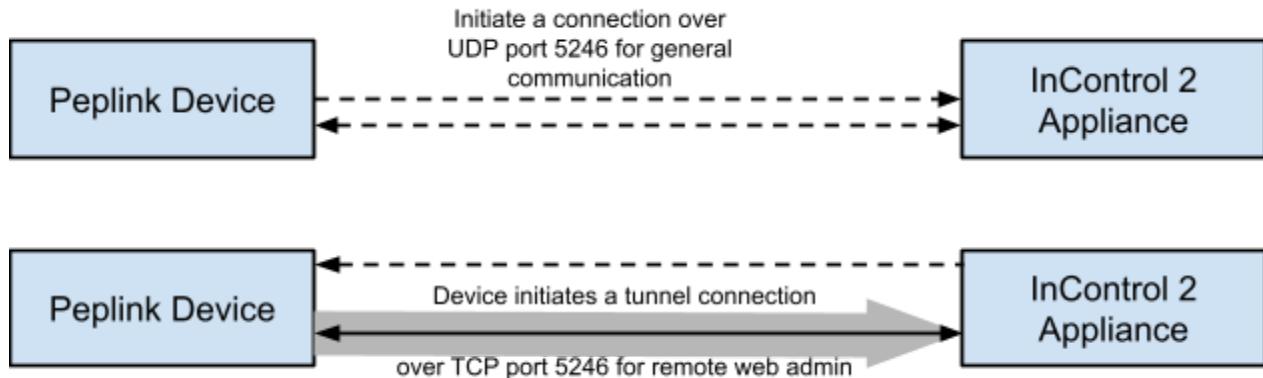


There are two ways to configure your Peplink devices to report to your InControl appliance instead of the Peplink InControl in the public cloud.

Method 1: By Configuring Devices Individually - for Internet Isolated Environments

Log in to the devices' web admin and put your InControl's WAN IP address or hostname to it. If a hostname is used, please make sure a DNS record for it has been created so that devices could resolve the InControl Appliance's IP address from it.

For Balance and MAX devices, they will have to be loaded with firmware 6.1.2 or above. Login to the web admin and navigate to System > InControl.

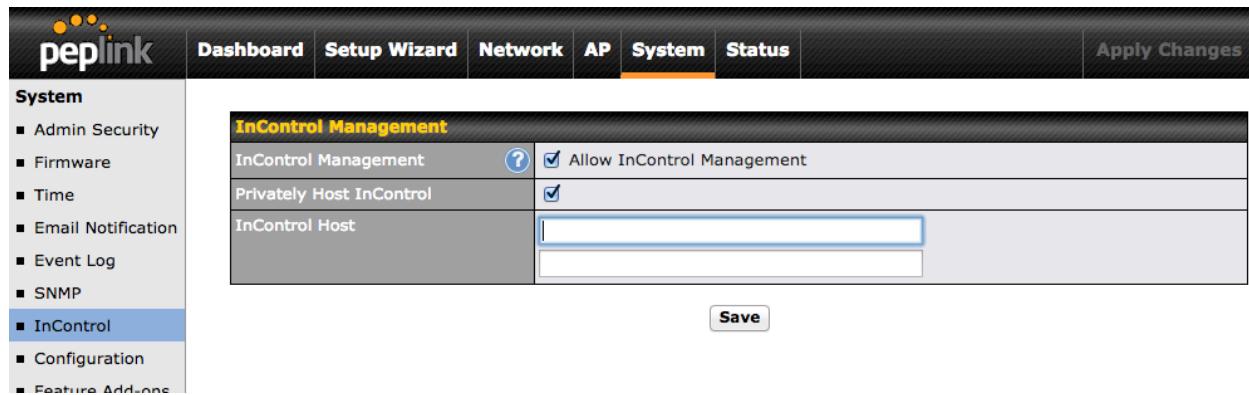


The screenshot shows the Peplink web admin interface with the following details:

- Header:** peplink | Dashboard | Setup Wizard | Network | AP | **System** | Status | Apply Changes
- Left Sidebar (System):**
 - Admin Security
 - Firmware
 - Time
 - Email Notification
 - Event Log
 - SNMP
 - InControl** (selected)
 - Configuration
 - Feature Add-ons
- InControl Management Section:**

InControl Management	
InControl Management	<input checked="" type="checkbox"/> Allow InControl Management
Privately Host InControl	<input checked="" type="checkbox"/>
InControl Host	<input type="text"/>
- Buttons:** Save

For AP One devices, you will need firmware 3.5.0 or above. Please navigate to System > Controller.

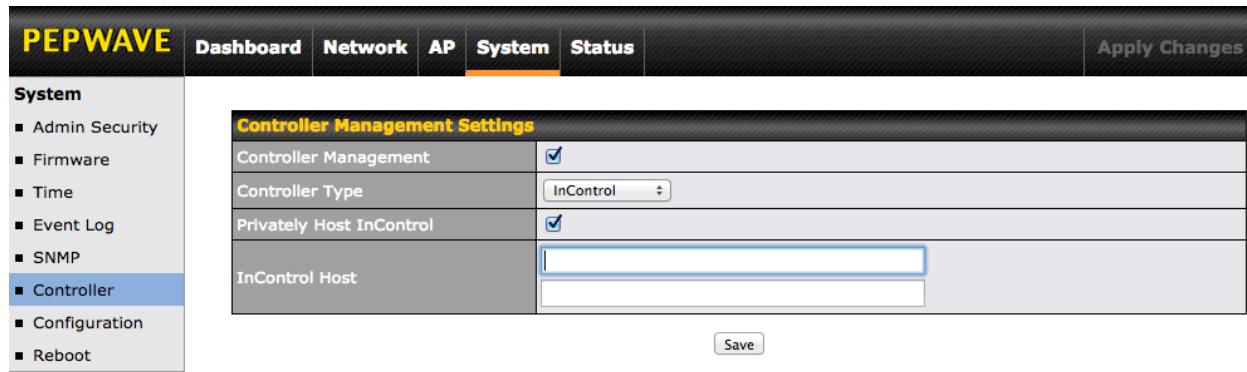

Controller Management Settings

Controller Management	<input checked="" type="checkbox"/>
Controller Type	InControl
Privately Host InControl	<input checked="" type="checkbox"/>
InControl Host	<input type="text"/>


Save

Input your InControl's IP address to the first InControl Host field.

Method 2: By Configuring or Redirecting Devices from the Peplink InControl - for Internet-accessible Environments

If your devices are accessible to both the Internet and your InControl appliance, you can follow this method. First, sign in to <https://incontrol2.peplink.com/>. Create an organization and a group by following the on-screen instructions. Add your devices to the group. Then go to the group-level **Device System Management** page and scroll down to the **External InControl Appliance Settings** section.

You could choose to redirect or configure your devices to connect to your InControl appliance.

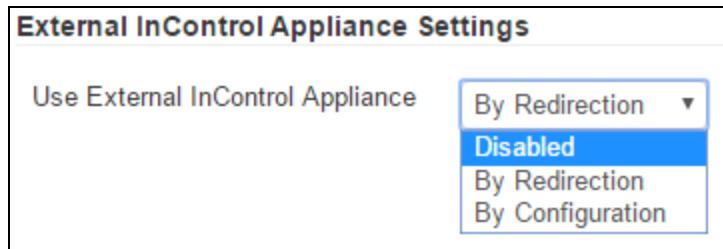

External InControl Appliance Settings

Use External InControl Appliance


By Redirection ▾

Disabled

By Redirection

By Configuration

If you choose **By Redirection**, devices will also connect to Peplink InControl first every time they start up. This option allows you to change your InControl Appliance's address easily in the future.

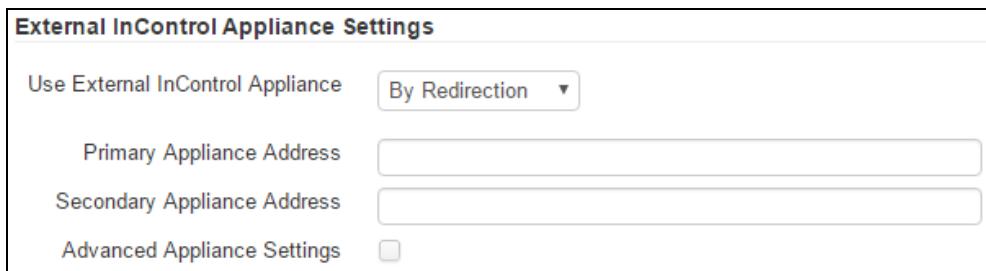

External InControl Appliance Settings

Use External InControl Appliance

By Redirection ▾

Primary Appliance Address

Secondary Appliance Address


Advanced Appliance Settings

If you choose **By Configuration**, your InControl Appliance address(es) will be saved persistently to your devices. After your devices receive the setting, they will connect to your InControl Appliance directly on startup without connecting to Peplink InControl. The appliance address will be lost if a device is reset to factory defaults.

External InControl Appliance Settings	
Use External InControl Appliance	<input type="button" value="By Configuration ▾"/>
Primary Appliance Address	<input type="text"/>
Note: If this field left blank, devices will be configured to connect to Peplink InControl in the public cloud	
Secondary Appliance Address	<input type="text"/>
Fail over to Peplink InControl in Public Cloud	<input type="checkbox"/>
Advanced Appliance Settings	<input type="checkbox"/>

You could configure devices to fail over to connect to Peplink InControl if they failed to connect your InControl Appliance.

6. Logging Into InControl Appliance Website

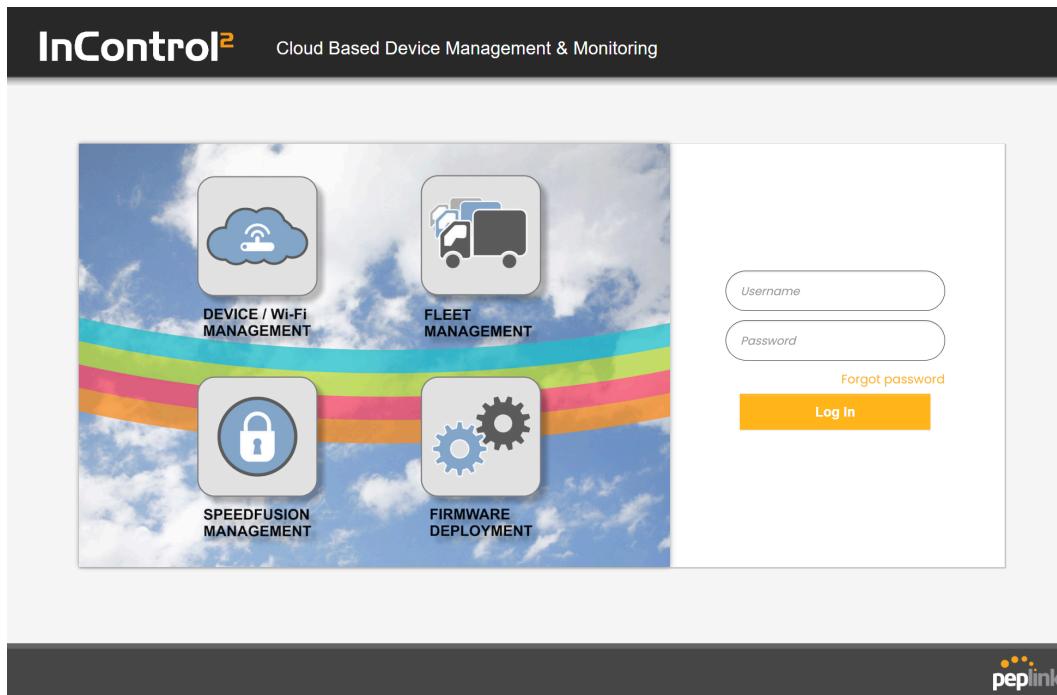


To access the InControl website, you must visit its hostname instead of its IP address. Your PC is required to resolve the hostname into the server IP address. You may add a local DNS record to your PC by editing its “hosts” file. It is “%SystemRoot%\System32\drivers\etc\hosts” for Windows or “/etc/hosts” for Mac and Linux. Let’s say the InControl IP is 10.8.7.6. The “hosts” file shall contain:

```
10.8.7.6 incontrol.my.domain
```

Now, you can access the InControl website from the PC’s web browser. By default, InControl’s URL is <https://incontrol.my.domain/>. The default username is `admin@my.domain` (note: do not replace “my.domain” with anything else) and the password is `12345678`.

After logging into InControl, you will see an MSP (Managed Service Provider) administration page, which is for managing the InControl system. To manage MSP administrator accounts, navigate to Settings > MSP Settings.

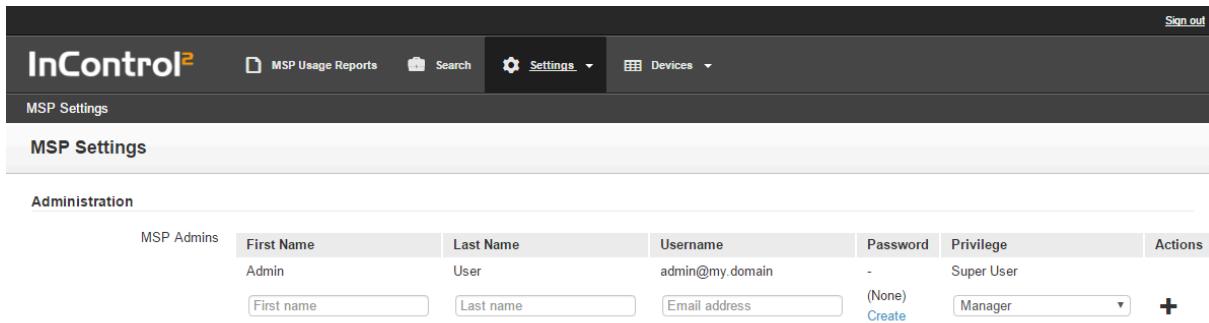


The screenshot shows the InControl 2 MSP Settings page. The top navigation bar includes links for MSP Usage Reports, Search, Settings (selected), and Devices. The main content area is titled "MSP Settings" and "Administration". Below this, a table titled "MSP Admins" lists one user: Admin (First Name: Admin, Last Name: User, Username: admin@my.domain, Password: blank, Privilege: Super User). There are input fields for First name, Last name, Email address, and a dropdown for Privilege (Manager). A "Create" button is also present.

7. Importing Devices

Before organization administrators can add devices to their organizations, the InControl system administrator (in InControl 2, we call the administrator as MSP Administrator) must import the devices’ serial numbers in advance. After an MSP administrator logs into the InControl website, navigate to “Devices” > “Import Devices”.

Input serial numbers in the text area, one serial number per line.

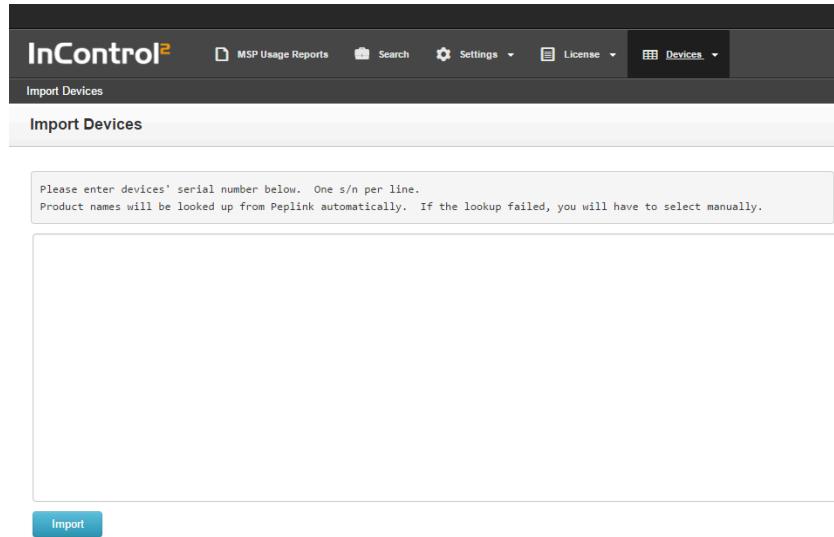


InControl Appliance will attempt to query the Peplink server what products the serial numbers are. If successful, the devices will be imported. If not, you will be prompted to select each device's product name.

Organization administrators (i.e. non-system administrators) can add the devices now.


8. Creating an Organization, Group, and Adding Devices

An organization is pre-created which is called "My Organization". You can find it on the MSP Reports page.

You may create more organizations by entering into an organization (e.g. "My Organization"). Then on the organization menu on the right of the screen, click "Create Organization".

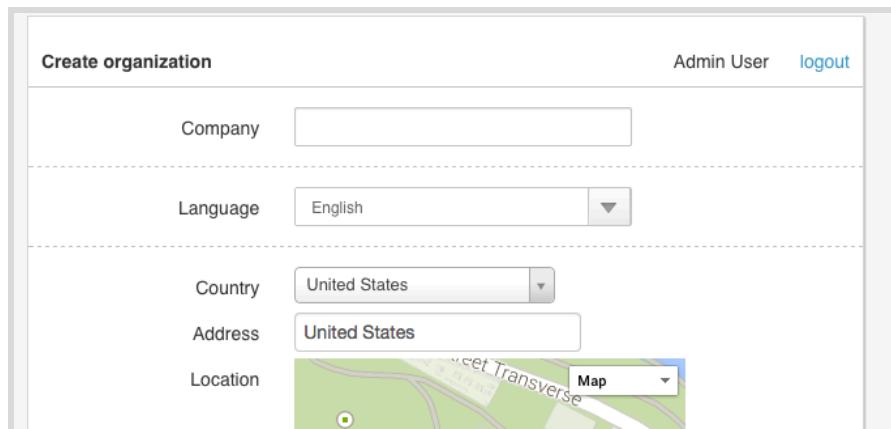

After you created an organization, you will be redirected to a group creation page. Devices are put into a group.

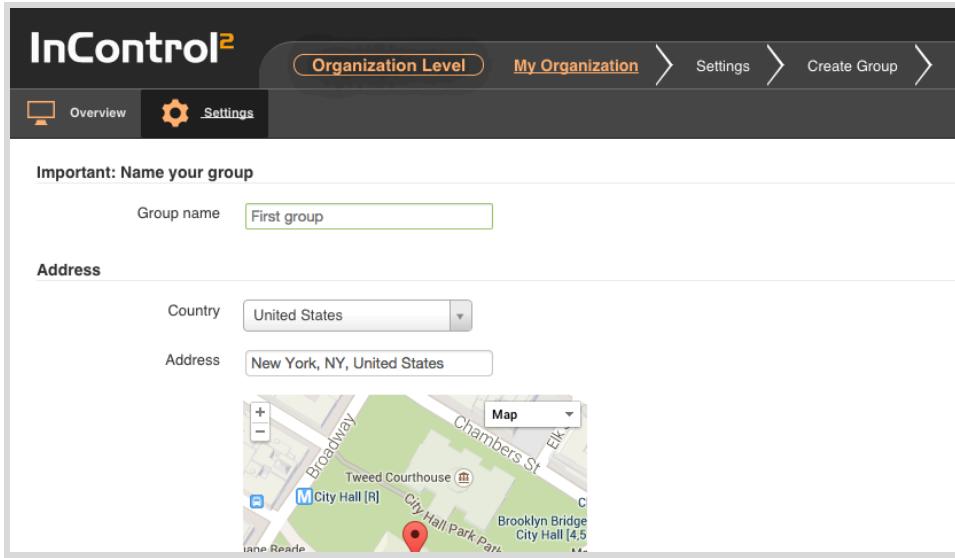

InControl2

Organization Level > My Organization > Settings > Create Group >

Overview Settings

Important: Name your group

Group name: First group


Address

Country: United States

Address: New York, NY, United States

Map

After creating a group, you will be redirected to the “Add Devices Into Groups” page.

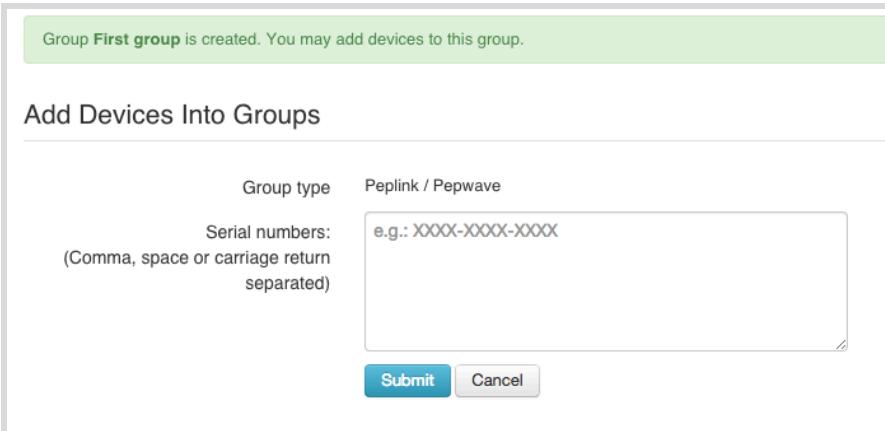

Group First group is created. You may add devices to this group.

Add Devices Into Groups

Group type: Peplink / Pepwave

Serial numbers:
(Comma, space or carriage return separated)

e.g.: XXXX-XXXX-XXXX

Submit Cancel

After the devices are added and the devices are powered up, you should see the devices become online in the InControl.

9. API Access

An API is available for software developers to programmatically retrieve the data as you see on the InControl appliance’s website. You can visit

https://{{ SERVER_NAME }}/api/ic2-api-doc for the API documentation and testing tool.

10. Your Firewall Settings

Please allow the following traffic to pass through if a firewall is set up in front of the appliance.

Direction	Protocol	Purpose
Inbound	UDP 5246	Device communication.
	TCP 5246 (if port 5246 is not reachable, port 1443 will be tried)	Device communication for remote web admin and InTouch.
	TCP 443	Web accesses.
	TCP 80	Automatic acquisition and renewal of SSL certificate for InControl appliance from letsencrypt.org (optional)
	TCP 4443	Web accesses to control panel
	UDP 53	Dynamic DNS service and automatic acquisition and renewal of SSL certificate for devices from letsencrypt.org (optional)
	TCP 2222	Direct remote assistance (optional, needed by Peplink for troubleshooting only when outbound to ra.peplink.com on TCP 443 is not accessible)
Outbound	ra.peplink.com on TCP 443	Remote assistance (optional, recommended)
	api.ic.peplink.com on TCP 443	For lively look up device's model when importing serial numbers (optional, recommended)
	download.peplink.com on TCP 443	Device firmware validation (optional)
	push.ic.peplink.com on TCP 443	Push notifications for the InControl 2 mobile app (optional)
	acme-v02.api.letsencrypt.org on TCP 443	Automatic acquisition and renewal of SSL certificate for InControl appliance from letsencrypt.org (optional)
	.peplink.com on UDP 5246 (details)	For lively device service expiration date synchronization and transferring FusionHub licenses from InControl 2 (public cloud) to FusionHub units connected to the InControl Appliance.

		(recommended)
		* Lively service expiration date sync is required for SaaS and Region Networks identification in outbound policy/firewall rules to work regardless of whether the appliance's license is legacy or modern.
Timeserver on UDP 123		Network time sync
DNS resolver on UDP 53		DNS resolutions

11 Data Backup

InControl Virtual Appliance provides two types of backup: Essential data backup and full database data disk backup.

11.1 Essential Data Backup

The system automatically back up all essential data to ".tgz" files every day. They can be downloaded from the control panel. The files contain the control panel settings, ICVA license, and all user data (e.g. devices, groups, organizations, users, configurations, etc.) in the database except bulky report data. They are essential data for restoring the entire system.


To restore a system from the backups will require Peplink personnel. The system automatically creates daily backups of essential data in ".tgz" format. These files include system settings on the control panel, the license key, and all data in the database (devices, groups, organizations, users, configurations), excluding large report data. This backup allows Peplink personnel to restore a completely functional system.

11.2 Disk Backup of the DB System

ICVA 2.14.0 or newer provides facilities for various virtualization platforms to create a consistent backup on the database VM data disk which stores all the user data. However, system settings and ICVA license are not included. So you are recommended to keep a copy of the essential data backup whenever you make any setting change on the control panel.


11.2.1 VMware

For systems running VMware platforms, you can simply take a snapshot on the DB VM's disk "/mnt".

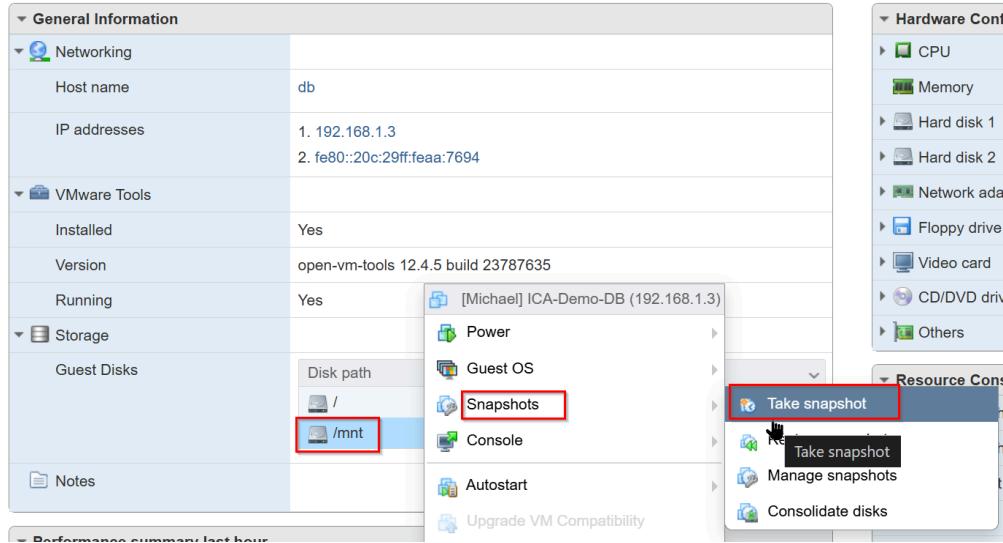

11.2.2 AWS

On AWS, a “Create EBS Snapshot for DB VM Data Disk” button is displayed in the System Commands section of the control panel.

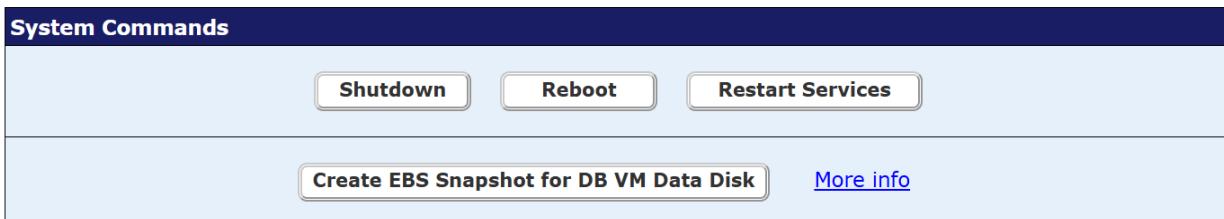


Clicking it will trigger the creation of a snapshot of the DB VM’s data disk volume.

In order to make it work, please ensure the policy **AllowSnapshotCreation** is added to the role **AutoDNSUpdatePeplink** in IAM. Please refer to chapter [1.6.5 Creating a role for Route 53 DNS update and snapshot creation](#) for details.

You might want to write a script to automate the snapshot creation. To do so, you can make an HTTP request to `https:// { SERVER_NAME } : 4443 / create_snapshot_in_aws /` with the username and password passed in (e.g. for the curl command, use the parameter “`--user <username:password>`”).

11.2.3 Hyper-V, GCE, and other virtualization platforms

For VMware, Hyper-V, GCE, and other virtualization platforms, a “Freeze” and “Thaw” buttons are displayed in the System Commands section of the control panel.

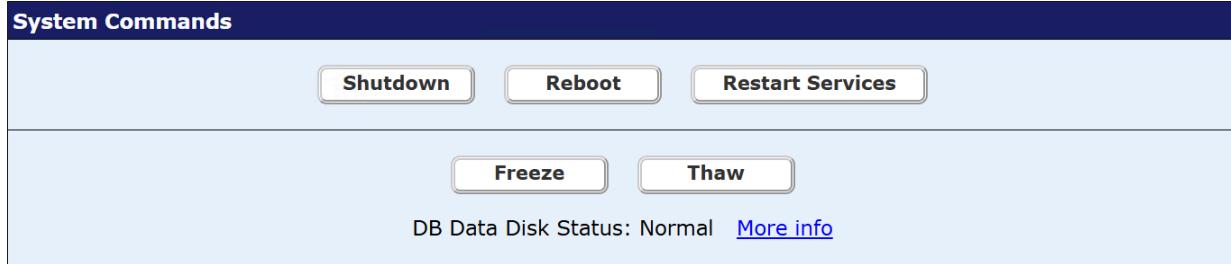

Before you trigger a snapshot or checkpoint (on Hyper-V) creation on the DB VM data disk in the virtualization platform, you may press the Freeze button to flush any data to the disk and free the disk. Note that you will be prompted to sign in again with “Basic Authentication” if you have not.

As freezing the disk will cause service interruption, the disk will automatically be thawed after 10 seconds. Or if you can also manually thaw the disk by pressing the Thaw button after you triggered a snapshot/checkpoint creation.

You may also want to write a script to automate the backup process. You can make an HTTP request to freeze the data disk, trigger a snapshot/checkpoint creation, and make a second HTTP request to thaw the data disk. The URLs for freezing and thawing the DB VM data disk are

```
https://{{SERVER_NAME}}:4443/freeze_dbvm_data/ and  
https://{{SERVER_NAME}}:4443/thaw_dbvm_data/
```

respectively. You are required to pass the username and password in making the requests (e.g. for the curl command, use the parameter “--user <username:password>”).

12. Upgrading InControl Virtual Appliance

12.1 Upgrading a system newer than 2.9.0

Starting from InControl Virtual Appliance version 2.9.0, the system could be upgraded by simply submitting firmware URLs to two fields on the control panel page. One field is for the InControl VM, and one is for the Database VM.

InControl Upgrade		
Firmware URL	<input type="text" value="Example: https://mydomain.com/firmware-1.0.img"/>	<input type="button" value="Upgrade"/>
Firmware Fetching Status		
Firmware Upgrade Status		

Note: After the firmware is downloaded, it will take about 15 minutes to update the system.

Database Upgrade		
Firmware URL	<input type="text" value="Example: https://mydomain.com/firmware-1.0-db.img"/>	<input type="button" value="Upgrade DB"/>
Firmware Fetching Status		
Firmware Upgrade Status		

Note: After the firmware is downloaded, it will take about 15 minutes to update the system. InControl and database VMs will be restarted.

You can find the firmware URLs from

<https://www.peplink.com/support/incontrol-appliance-images-downloads/>

IMPORTANT: Upgrade the DB VM to 20250520 or above before upgrading the IC VM to 2.14.0 or above.

If you are required to upgrade both Database and InControl VMs, you should always upgrade the Database VM first. Upgrade the InControl VM only after the Database VM boots up with the latest firmware completely.

If your system is disconnected from the Internet, you will need to download the firmware files manually and upload them to an internal web server, which is accessible by the InControl VM. Then input the firmware files' internal URLs into the two fields on the control panel page. The system will download the files and upgrade the two VMs.

12.2 Upgrading a system earlier than 2.9.0

To upgrade from any release earlier than 2.9.0, you will need to upgrade to 2.9.0.2 first and then upgrade to the latest release by following the instructions in [chapter 11.1](#) above.

To upgrade to 2.9.0.2, you should upgrade the system by replacing the two VMs' system disks. As long as the InControl VM's data disk and Database VM are kept intact, all old settings (including IP address, admin password, etc.) and devices' data will be seamlessly carried over.

Before performing an upgrade, we encourage you to download the latest backup from the control panel first.

12.2.1 For VMware ESXi

Step 1. Download the latest Virtual Appliance and Database Server Installation Image files in `.tgz` format from
<https://www.peplink.com/support/incontrol-appliance-images-downloads/>

Step 2. Extract `.tgz` files on a PC. `".tgz"` is shorthand of `".tar.gz"`. Extract the files with a file extractor on your PC or Mac. (Note: Do not extract on the ESXi server's command shell, as its `"tar"` command is incompatible with the file.)

The extracted file names and sizes are as follows:

InControl-System-2.9.0.2-vmdk.tgz:


File name	Size (Bytes)
InControl-System-2.9.0.2-vmdk/InControl-System-2.9.0.2-flat.vmdk	25,769,803,776
InControl-System-2.9.0.2-vmdk/InControl-System-2.9.0.2.vmdk	688

DB-System-20210323-vmdk.tgz:

File name	Size (Bytes)
DB-System-20210323-vmdk/DB-System-20210323-flat.vmdk	26,843,545,600
DB-System-20210323-vmdk/DB-System-20210323.vmdk	660


Step 3. Start the Datastore Browser in the vSphere Client. Use it to upload the `InControl-System*.vmdk` and `DB-System-* .vmdk` files to folders, say,

“InControl” and “Database” in the datastore respectively. After finishing uploading the two files, the two files will be shown as one item in the Datastore Browser.

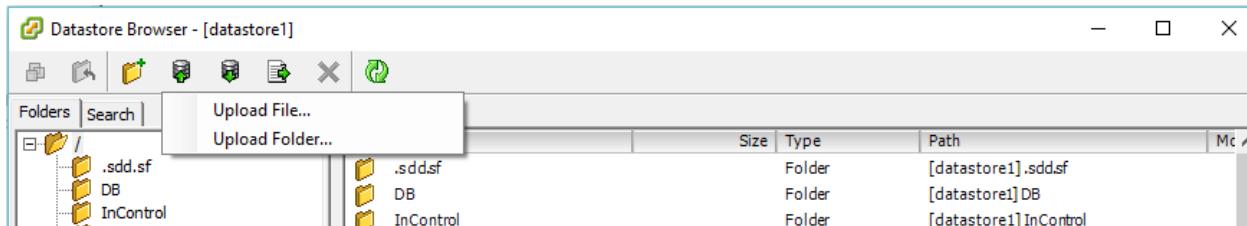


Step 4. Restart VMs in the following order:

1. Stop InControl VM. Wait until fully stopped
2. Stop DB VM. Wait until fully stopped
3. Open DB VM Properties,
 - Identify and select the system hard disk (usually “Hard disk 1”)
 - Select the “Remove from virtual machine” radio button (without deleting it)
 - Press “OK”

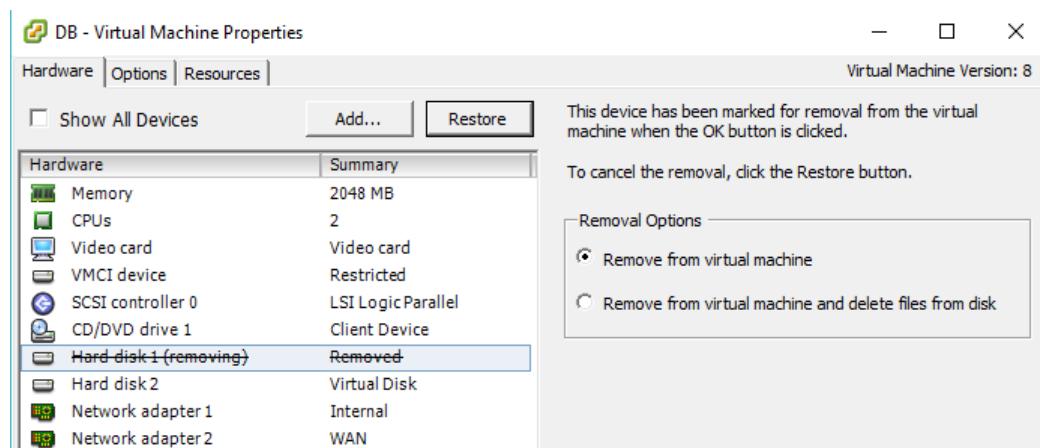

4. Open DB VM Properties again
 - Select 'Add...' > “Existing virtual disk...” > Browse and select the disk file “DB-System-20210323.vmdk”


- Select SCSI 0:0 Hard disk as the Virtual Device Node

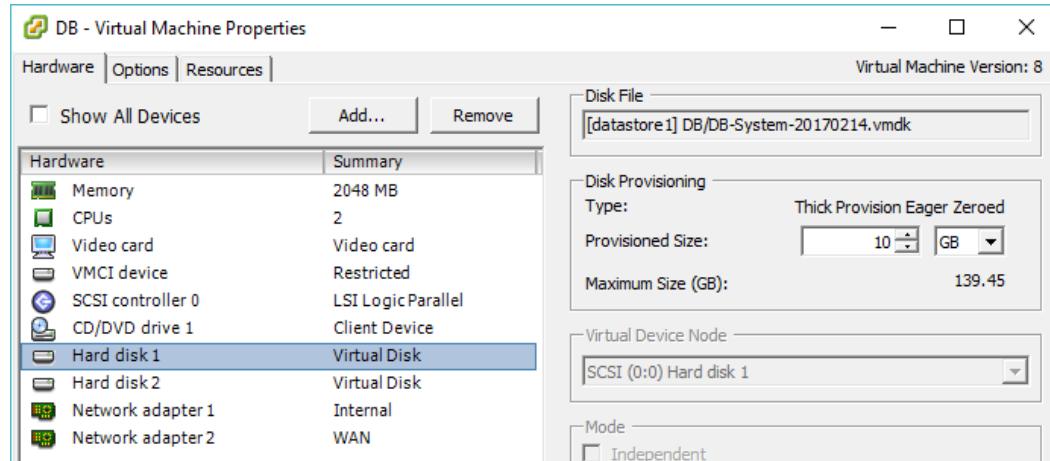

5. Start DB VM

6. Open InControl VM Properties


- Identify and select the system hard disk (usually "Hard disk 1")
- Select the "Remove from virtual machine" radio button (without deleting it)
- Press "OK"

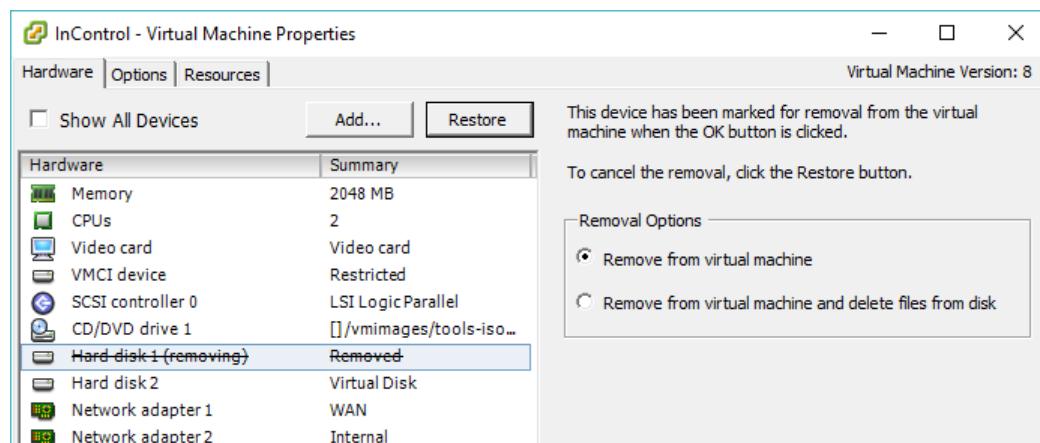

7. Open InControl VM properties again

- Select 'Add...' > "Existing virtual disk..." > Browse and select the disk file "InControl-System-2.9.0.2.vmdk"

- Select SCSI 0:0 Hard disk as the Virtual Device Node

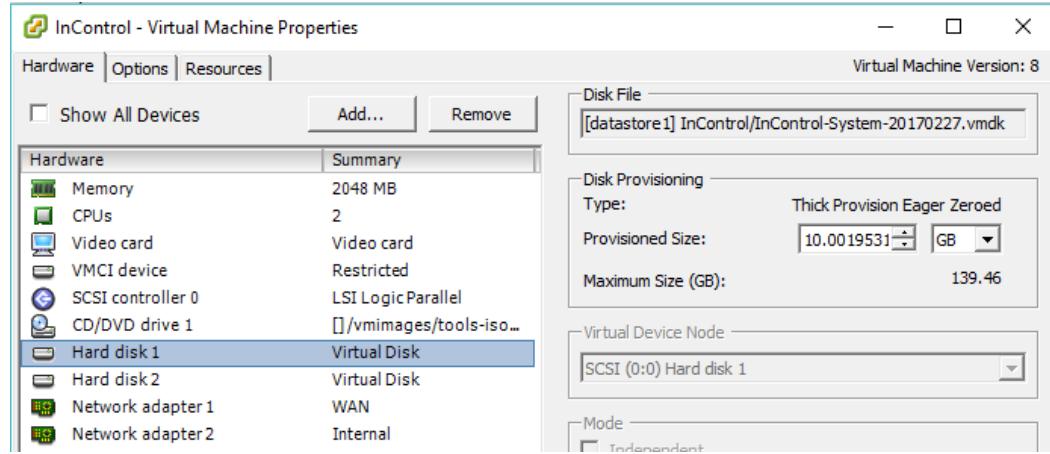

8. Inspect the DB VM's console. When it has booted up completely, start the InControl VM. Finished.

12.2.2 For Microsoft Hyper-V and versions prior to 2.9.0


Step 1. Download the Virtual Appliance 2.9.0.2 and Database Server 202103223 image files in .vhdx format from
<https://www.peplink.com/support/incontrol-appliance-images-downloads/>

Decompress the .vhdx.gz files into .vhdx files. The .vhdx file names and sizes are as follows:


File name	Size (Bytes)
InControl-System-2.9.0.2.vhdx	25,035,800,576
DB-System-20210323.vhdx	25,035,800,576

Step 2. Deployment

1. Stop InControl VM. Wait until fully stopped
2. Stop DB VM. Wait until fully stopped
3. Open DB VM Settings. Identify and select the system hard disk. Replace the virtual hard disk with the newly downloaded DB-System-20210323.vhdx file. The “Location” for IDE Controller should be 0.

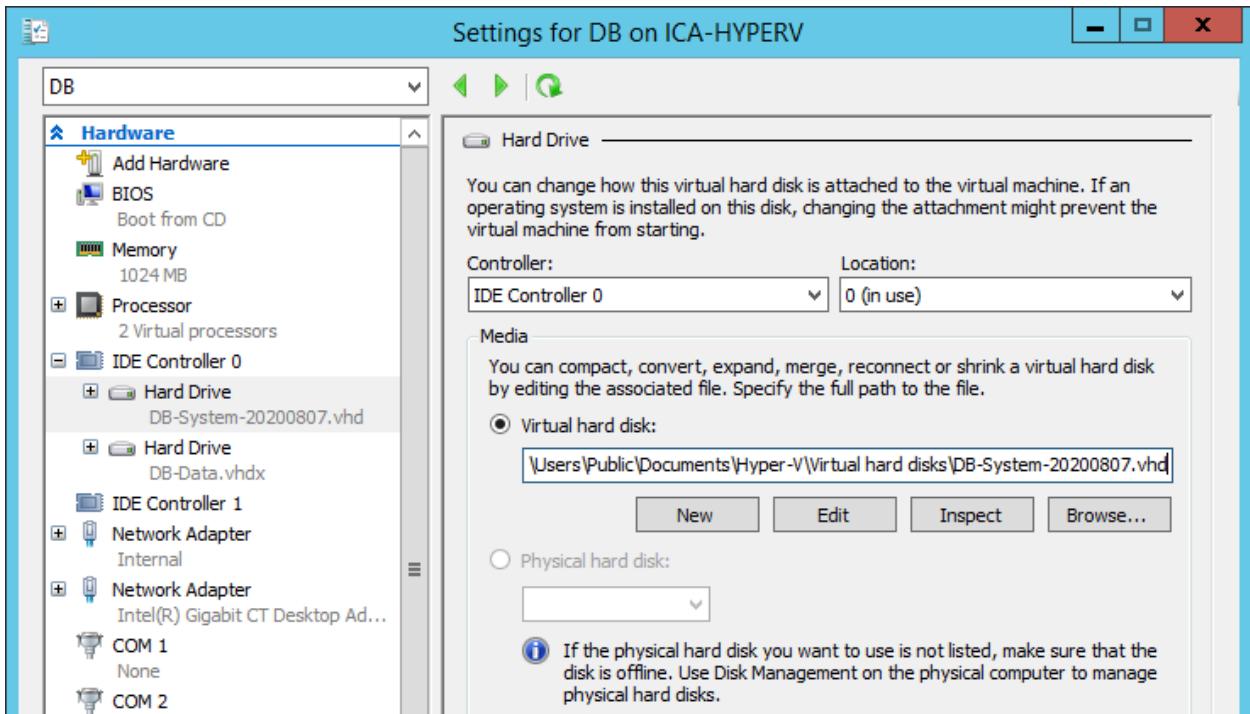

4. Start DB VM.
5. Open InControl VM settings. Identify and select the system hard disk. Replace the virtual hard disk with the newly downloaded InControl-System-2.9.0.2.vhdx file. The “Location” for IDE Controller should be 0.

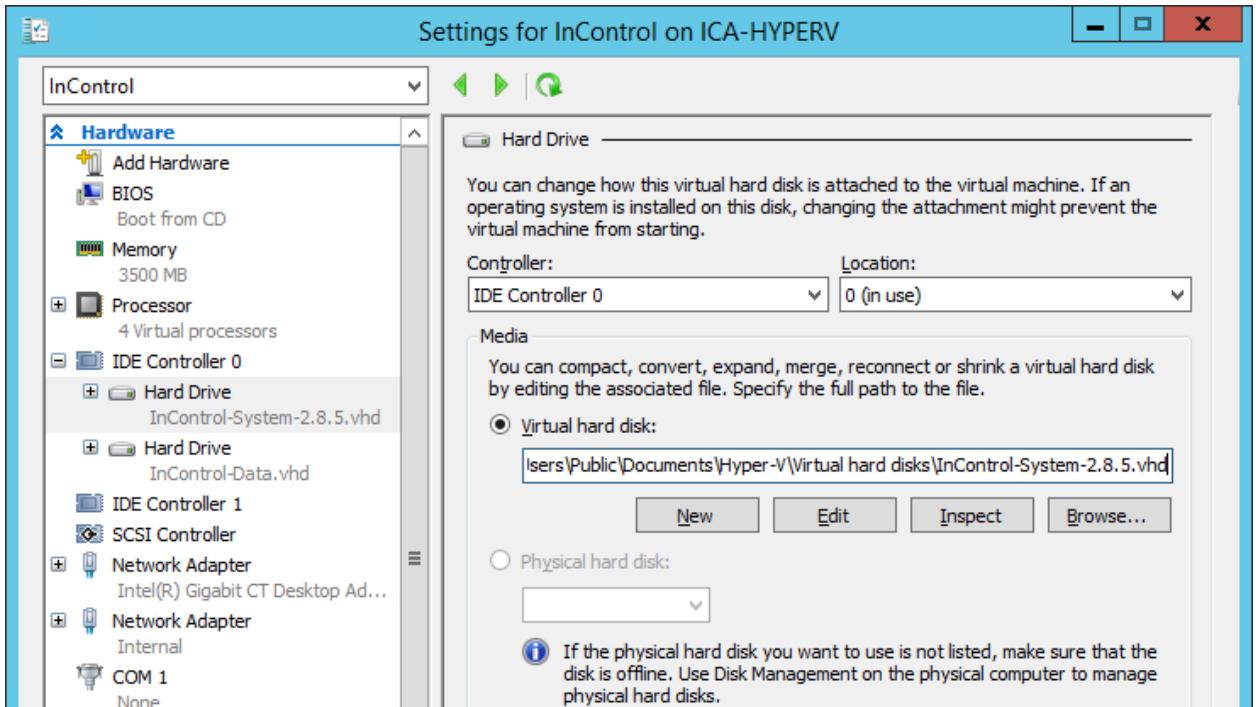

6. Inspect the DB VM's console. When it has booted up completely, start the InControl VM. Finished!

13. Release Notes

Release notes for 2.14.1.2

- A problem that occurred during system startup has been resolved, which previously affected the system if the password for web management, FTP, or SMTP included an ampersand (&).
- Resolved the two-factor authentication email code issue, which began in version 2.14.0.
- On AWS, various metrics are posted to CloudWatch. E.g. CPU Utilization, Swap
- Fixed: the number of SFTP connections to the archive server kept increasing.

Release notes for DB-20251229

Here are the changes since DB-20250520:

- Fixed the MongoBleed (CVE-2025-14847) vulnerability.
- Fixed: failed to create EBS snapshots in AWS.

Release notes for 2.14.1.1

Please read the breaking change in 2.14.1 below.

What's new

- Enhanced memory allocations to the core and API services. Improved system stability.
- Added API for querying a device's details by a serial number.
- Fixed: remote web admin did not work for some devices for ICVA with a legacy license.
- Improved support for the latest Peplink SD Switches.
- Added the data disk's usage information to the SNMP OID .1.3.6.1.4.1.2021.9.

Release notes for 2.14.1

Breaking change

Since InControl 2.14.1, the system utilizes the OpenMapTiles API for map loading, replacing the previously used Google Maps JavaScript API. This change allows map tiles to be sourced from various providers, including Google Maps and HERE Maps.

Consequently, if you are providing a Google Maps API key to display maps, you must now enable the "Map Tiles API" within the Google Cloud Console. This is a mandatory step to ensure Google Maps loads correctly in InControl 2.14.1 and all subsequent versions.

What's new

- Added a token-based API for looking up organization, group, and device ID of a serial number.
- Added HERE Map support. Added option to choose the API service to use for displaying the maps, satellite view, and geocoding.
- Supported WAN configurations on major settings.
- Device System Management: added an option to turn Bluetooth off on all devices.
- Added "All" VLAN selection to trunk ports.
- Dynamic location source is now indicated (e.g. GPS, Starlink, Google Maps Geolocation API, etc.)
- HTTP/S Notifications (Webhook): notification to received can now be selected.
- Outbound Policy > Weighted Balance: added SpeedFusion VPN connection support.
- InTouch Settings can now be copied to another device in the same organization or group.
- MSP, organization, and group-level device list: devices can be selected by providing a serial number list.
- Captive portal: added an option for preventing immediate closure of the captive portal after signing in on Android devices. (34868, 34867)
- User organizations page: search result is now bookmarkable.
- Device Details > Starlink status: an indicator is displayed when the Starlink service quota exceeded.
- Notification settings: added info tip to every notification type.
- In Wi-Fi radio settings, removed the "Auto" channel width selection.
- Added an API endpoint for changing device tags one in one operation.
(`device_hashtag`)
- Site survey: add a Download as CSV link.
- WAN usage data is no longer captured from access points in bridge mode.
- Organization user roles are now hidden from group-level settings.
- Wi-Fi SSID settings: the MFP option is now always enabled in WPA3-Enterprise mode.
- Check cellular module support before downgrading device firmware.
- Captive portals:
 - Guest account mode: expired guest accounts can now be reactivated.
 - Guest account mode: all columns and expired users are now included in the guest account CSV file.
 - Supported right-to-left languages.
- In doing eSIM discovery, the number of profile retrieved and installed are now displayed.

Release notes for 2.14.0.3

What's new

- Fixed an issue with the SpeedFusion usage reports.
- Fixed a potential data synchronization failure error with the public InControl if the system is managing many devices.
- Fixed an hourly report generation error.
- Updated Content Security Policy.

Release notes for 2.14.0.2

What's new

- Fixed: in captive portal profiles, if a landing page is configured to an address outside the InControl, guests will not be able to reach the landing page during sign-ins. They will be stuck on the “signing in” screen.
- TLSv1.3 is enabled for web requests.

Release notes for 2.14.0.1

What's new

- Fixed: boot up process stalls in some situations.
- Fixed: WAN connection history shows up events only.
- InTouch: added support of the HTTP request method “PATCH”.

Release notes for 2.14.0

IMPORTANT: it requires DB VM version DB-20250520 or above. It is preferred to upgrade the DB VM before upgrading the IC VM.

What's new

- The OS is upgraded to Ubuntu 24.04.
- Added support of creating data disk backups for the DB VM data disk. See chapter [11 Data Backup](#) for details.
- Added an MSP-level API to look up the organization ID of multiple serial numbers. See the API documentation at <https://{}{}/api/ic2-api-doc/>.
- Supported sending emails in SMTP TLS mode.

- Send MSP and organization level operation log to a syslog server.
- If IP-based InTouch is enabled, Remote Web Admin URLs will be changed to the format "`https:// {SN}-ic.{SERVER_NAME}/`". This change fixes a compatibility issue with POT Adapter web admin.
- Added Starlink data pools.
- Added bandwidth throttling in SIM pools.
- Added site survey on cellular networks.
- Added a new device online state "Appeared Online Today" for devices without a care plan.
- Added organization-wide grouped networks.
- Device Details:
 - Included any system messages displayed on devices' web admin.
 - When the "Find My Peplink" option is enabled, the device's web admin server SSL will automatically be managed too.
- Device list: added a "Hide expiration notices" checkbox.
- "Grouped MAC Addresses" replaces "Access Control List". Added "Ingress ACL" and "Port-based 802.1x Authentication" configurations.
- SpeedFusion VPN configuration:
 - Added detailed loading status, for organizations with many devices.
 - Greatly reduce saving time when profiles contain large numbers of devices and/or connections.
 - Added "TCP Traffic Optimization" setting.
- SSID profile > "Last 8 octets of LAN MAC as key": added an uppercase option.
- Added "Colombia" to the Operating Country field in Wi-Fi Radio Settings.
- Administrators can temporarily disable a user from accessing their organization or group. MSP Administrators can disable a user from accessing the system.
- Notifications: Added POTS Adapter and DHCP Server events. Added Power Supply Change option to MAX Adapter.
- Web-based InTouch profiles: added Username and Password fields for HTTP Basic authentication.
- WAN Quality Reports: added a "Throughput" option to include per-minute bandwidth figures on the chart.
- Device System Management:
 - A random web admin password can be regenerated automatically every month.
 - Added "Timeout" and "Source Network Address" for RADIUS and TACACS+ settings.
 - Added additional SNMP Trap settings.
- Docker scripts are now run when devices report online.
- Added the Actions menu item "Ignore Starlink Obstruction Outage" on the device management screen.

- FusionHub licenses: the “Auto Renew” buttons’ states will be persistent and not be auto-disabled after the licenses’ hardware identifiers are renewed.
- Firewall rule set > Content Blocking: added a logging option.
- Added an “IGMP Fast Leave” option to the latest SD Switches’ port settings screens.
- Captive portal:
 - E-mail access mode: outgoing emails can optionally be sent to a “cc” address.
 - Supported the latest Google Analytics ID format.
 - Prevented the pop-up browser from closing immediately on Android devices.
- External captive portal: added the “Authentication Protocol”, “Popup Handling”, and “Logout Hostname” settings to profiles.
- Added Japanese localization.
- Fixed: SIM data usage of synergy controllers is now ignored from SIM pools.
- Changed: the "Top Client Device Manufacturers" table in Device/Wi-Fi Reports is only available for the last 31 days

Release notes for DB-20250520

Here are the changes since DB-20240410:

- The OS is upgraded to Ubuntu 24.04.
- Supported freezing and thawing the database VM data disk through the control panel or API. See chapter 11 Data Backup for details.

Release notes for 2.13.4.5

What's new

- Control panel sessions (on TCP port 4443) are now changed to authenticate on-screen (i.e. cookies session based) rather than in a browser pop-up. Auto session timeout and idle timeout are implemented. A “Sign Out” button is also provided.
- Fixed system stability issues due to frequent MySQL database reconnections.
- Fixed: inconsistent device online states were displayed at the organization and group levels.
- Fixed: monthly usage reports were sent at an incorrect time.

Release notes for 2.13.4.3

What's new

- IMDSv2 on AWS is now supported.
- Captive portal: delayed the closing of the pop-up browser on Android devices.

- Fixed: unable to purge some old data from the database
- Fixed the access control applied on the DB VM.
- Fixed: the “Locate Device Position by Cell ID and Signal” feature was enabled on devices with GPS data.
- Fixed bugs in supporting the latest SD Switch models.

Release notes for 2.13.4.1

What's new

- Fixed: failed to upload data to the archive server.
- Fixed: failed to send FTP/SFTP serve down notifications.
- Fixed: failed to reset captive portal guest quota in certain time zones.
- Fixed the event log for any configuration changes made in the Peplink App.

Release notes for 2.13.4

What's new

- Supported running InControl Virtual Appliance on KVM on the Peplink Edge Computing platform.
- Added support of the latest models of SD Switches.
- The Redis and MongoDB services on the DB VM is now restricted to be accessed by the InControl VM **ONLY**. It can no longer be accessible from any other hosts in the same network.
- Added FTP/SFTP archive server down notifications. An email will be sent to the System Administrator.
- Added Client Monitoring. On the Clients pages, a Monitor button is added to all LAN clients. On the Notification Settings screen, you can choose to be notified by e-mail or Pushover upon a client goes offline, online, or the Wi-Fi signal drops below a certain threshold. Note: the monitoring is passive.
- Added domain support in Grouped Networks.
- Added API for creating basic firewall rules and SSIDs.
- Captive portal:
 - Email and SMS access modes: an option is added to display a shortened version of agreements.
 - Token access mode: Data quota can now be enabled along with multiple sessions.
- Added Starlink events to WAN Quality Reports.
- Wi-Fi QR codes are displayed in SSID Settings and Device Details.
- SD Switch port settings are now editable before the switch reports online.

- For SSID profiles configured in WPA3 Personal or Enterprise modes, an option is added to configure them as WPA2 mode on WPA3-unsupported devices.
- InTouch:
 - Added InTouch indicators to clients on device-level Clients pages.
 - Profiles can now be cloned.
- Device Details: the total PoE and PSU power consumptions are now displayed.

Release notes for 2.13.3.2

What's new

- Fixed: device goes online and offline every a few minutes for systems loaded with a legacy license.

Release notes for 2.13.3.1

What's new

- All “secret” fields on the control panel are now masked. E.g. RADIUS server secret.
- Fixed: InTouch was broken in 2.13.3.
- Added an option to configure a WPA3 SSID as WPA2 on WPA3-unsupported devices.
- Fixed: the MongoDB log file were not rotated.

Release notes for 2.13.3

What's new

- Supported signing in with custom OpenID provider (e.g. Okta)
- Added device import and deletion API.
[POST] /rest/msp/devices/import
Data: {"data": {"sns": ["SN1", "SN2"], "ica_offline_mode": true}}
[POST] /rest/msp/devices/remove
Data: {"data": {"sns": ["SN1", "SN2"]}}
- RADIUS authentication settings now applies to both InControl and control panel sign-in.
- Added organization-level SSID settings.
- eSIM
 - Peplink eSIM Data Plan information is displayed on Device Details. Pooled plan information is shown in the Organization Overview.
 - Added eSIM discovery support in eSIM activation.
 - Status is now displayed in downloading an eSIM profile.
- Added Private Pre-shared Key (PPSK) settings to SSID Settings.
- Added notifications for “All devices offline”.

- Added a “By upload” option to “Outbound Policy > Least Used”.
- SD Switch: added PVID per switch port.
- Device list: added “SSIDs” and “First Appeared” columns.
- Added Content and Application Blocking logs.
- Add a geo-fencing action: stow/unstow Starlink.
- Captive portal reports can now be displayed on a per-captive-portal basis.
- Added support for upgrading firmware of devices in synergy mode.
- SpeedFusion VPN:
 - Added adaptive FEC settings.
 - Removed DR hub requirements in Star Topology profiles.
 - Added a warning for changes that will trigger link renegotiation.
- Revamped “Device Details > Edit” screen. Added a Starlink WAN setting.
- The archived events are now also included on the map on the Device Details screen.
- After a device is added to a group, all its supported settings can be displayed before it appears online for the first time.
- Organization-level firmware policy: added an option to follow the groups’ timezones, rather than GMT+0 only, in defining schedules.
- Notifications: supported selecting the individual days of a week in the Silence Period settings.
- When moving devices to another group, options are added to retain their device names and locations.

Release notes for 2.13.2.2

What's new

- Fixed: WAN Quality Reports may show no data if an SFTP or FTP server is configured as the archive server.
- Fixed: WAN Quality Reports may show no SINR values in some situations.
- The user-organizations page
 - supports searching devices by firmware version.
 - A search is triggered only if the search text contains 3 or more characters.
- Fixed Allowed/Denied search options on the Firewall Log page.
- Fixed: captive portal viewers could access the Captive Portals settings screen.
- Fixed a potential system upgrade bug presented in 2.13.2 and 2.13.2.1 when upgrading from a system older than 2.13.0.

Release notes for 2.13.2.1

What's new

- Added support of authenticating users with a RADIUS server (beta).

- Fixed compatibility issues with MySQL 8. It causes configurations not being applied to devices.
- Fixed a false storage warning on the control panel.
- After fresh installing ICVA on AWS or AWS GovCloud, this is the default version.

Release notes for DB-20240711

Here are the changes since DB-20230410:

- Fixed connection limit setting of the MySQL 8 server.
- After fresh installing ICVA on AWS or AWS GovCloud, this is the default version.

Release notes for DB-20240410

Here are the changes since DB-20211215:

- The operating system of both InControl and database virtual machines are upgraded to Ubuntu 22.04.
- MySQL server is upgraded to 8.
IMPORTANT: the database VM must be upgraded to this or newer release before upgrading the InControl VM to 2.13.2.

Release notes for 2.13.2

What's new

- The operating system of both InControl and database virtual machines are upgraded to Ubuntu 22.04.
IMPORTANT: the database VM must be upgraded to 20240410 or above before upgrading the InControl VM.
- Fixed the regreSSHion bug (CVE-2024-6387)
- Fixed the issue in making MySQL connections.
- Supported applying a device configuration to another device of the same or different model. See Device Details > Show All > Configuration Backups. Currently, only Balance and MAX models with no FlexModules slot are supported.
- Supported bulk activating eSIMs on multiple devices. Please see the Actions menu on the Device Management screen.
- eSIM EID is displayed on the device details and device management screens. Devices are searchable by EID on the device management and user organizations screen.
- Cellular module firmware can be upgraded on the next startup if the device is offline.
- Device Details
 - Added support for switching Peplink eSIM, BYO eSIM, remote SIM, and FusionSIM.
 - Indicators are added to device and SIM levels if a SIM pool controls a SIM card or the SIM pool's quota has been exceeded.

- Added a Starlink alert to indicate no location data is received from Starlink and GPS.
- Added a menu for running a connection test available to the device.
- Merged SpeedFusion VPN / SFC Cloud peers' sub-tunnel statuses
- Added Starlink data to WAN Quality Reports.
- Added Remote Web Admin for AP-controller-managed APs.
- User organizations: added more device information fields to device search results.
- Added session lifetime and direct connection options in enabling Remote Assistance.
- FusionHub licenses can optionally be auto-renewed upon any planned hardware ID changes.
- Device-level Bandwidth & Usage Reports: added BYO eSIM to cellular WAN selections.
- SpeedFusion VPN configuration:
 - Added support for static IP selection when L2 bridging is active.
 - Local LAN Settings: added SpeedFusion VPN in Domain Lookup Policy.
 - Added the "Upload Bandwidth Limit" setting to SpeedFusion topology profiles.
- InTouch: Added WebSocket compatibility mode 2.
- Added support for applying SSID settings to AP controllers.
- Added a "Both" option to the frequency setting in Wireless Mesh.
- Added a note field to InTouch profiles.
- In downloading a CSV file of a long device listing, the file will be sent over email to avoid any long wait or timeout.
- Group-level Usage Reports > Monthly: click a month to show per-device per-WAN usage.
- Added device track history to the organization and group-level maps.
- Captive portal:
 - Guest Account mode: added quota reset time to guest accounts.
 - Add a "Cache Website Server Name" setting.
- In rebooting to the last firmware, the firmware's version is now displayed.
- Added Docker management support. Firmware 8.4.2 or above is required.
- Fixed: the "Send All Traffic" option in SpeedFusion profiles was not disabled when the Layer 2 bridge was enabled.

Release notes for 2.13.1.2

What's new

- Added support of AWS S3 as the archiving method in InControl appliance control panel.
- Fixed: devices might falsely appear as offline.
- Fixed: tagging by geo-fencing sometimes did not work.
- Fixed: PrimeCare Plus license was not synced from the public InControl to InControl appliances
- Fixed: Followed-GPS locations are not displayed in WAN quality reports.
- Fixed: error in importing FusionHub license packs.

Release notes for 2.13.1

What's new

- When changing password, users cannot pick the last 10 used passwords.
- InTouch
 - Web-based InTouch: add two compatibility options.
 - InTouch profiles can be accessible by some InTouch users only.
- Reports
 - Wi-Fi Report > SSID Usage: added per-SSID client usage.
 - Group-level Usage Reports > Daily: clicking a date will show per-device per-WAN usage.
 - Daily usage reports: the date range changed from 32 to up to 45 days.
 - Performance Test: location and speed data are now recorded in test results.
- Custom map markers can be uploaded on the Organization and Group Settings screen. They can be chosen for devices' markers in Device Details > Edit screen.
- Added group-level operation log. Available to group administrators too.
- Outbound Firewall Rules: added a checkbox option for including router-generated traffic.
- The organization and group level option "Auto Update Captive Portal SSL Certificate" has been reset to disable. Users will need to manually enable it. Balance and MAX firmware 8.4.1 or above are now required.
- Improved eSIM activation status report.
- Added display of live vehicle status data collected from OBD-II interface on Device Details.
- Added support for multiple subnets in the LAN_NETWORK_LIST field to group-level Device IP Settings.

Release notes for 2.13.0.2

What's new

- Fixed: system could not boot up on NVME-based storage
- Implemented an HTML5 cross-origin resource sharing (CORS) policy that allows accesses from its own server name only.

Release notes for 2.13.0.1

What's new

- Fixed device date synchronization
- Fixed update of web admin SSL certificate
- Fixed Starlink and Wi-Fi mesh event logging

- Fixed outbound policy
- Fixed SSID usage report.
- Updated the diagnostic reports.

Release notes for 2.13.0


What's new

- Supported running on Azure. (Installation guide is to be updated.)
- Auto GPS follow (31138)
- Added Starlink support. For supported models, if Starlink support is enabled on the WAN Settings page on the web admin, the Device Details screen will display any Starlink status and controls.
- Added options to Group and Organization Settings to allow viewers to see all settings.
- If a FusionHub license becomes invalid due to some changes on the virtual machine, administrators are allowed to renew its license without reinstalling the FusionHub.
- Captive portal: added support of bandwidth limit after data quota reached for the remaining time quota.
- When creating a group, group-level settings can be cloned from an existing group.
- When creating an organization, two-factor authentication will be required for all users by default.
- Inbound Firewall rules: added SaaS to the Source drop-down menu.
- Outbound Policy rules: added "Access Control List", "Client Type" and "Client Associated SSID" to the Source drop-down menu.
- On the User Organizations page, users can remove themselves from an organization or group.
- Connection tests: logging and notifications can optionally be enabled when a test fails.
- Added support of applying an eSIM activation code.
- Added support of displaying LoRaWAN status in Device Details.
- Device-level per-minute bandwidth and usage report: added a button to export the report as an image.
- Device Details > Map: supported to "Download as GPX" for a date range.
- AP-controller-managed devices' details screen: added a hyperlink to the controller's Remote Web Admin page.
- Notifications: added Starlink and High System Temperature.
- InTouch SSH profile: a warning is displayed if the key is not passphrase protected.
- SIM pool: added carrier quota settings to "All Carriers".
- Clients: added CSV file download.
- Added advanced group and organization firmware update schedule settings for higher flexibility.
- Added Netflow settings to Device System Management.
- When disabling Email Notifications, subscription settings are now preserved.

- Devices' routes are now shown on Device Details pages and can be searched by IP address on the "User Organizations" page.
- Added custom handshake port option for manually added devices in SpeedFusion configurations.
- If APs are connected to a router that is with GPS location data, the APs will appear at the same location as the router on the map. (Requires Balance/MAX firmware 8.4.1 or above and AP firmware 3.9.4 or above.)

Appendix 1: Procedure for preparing the data for setting up “Sign in with Apple”.

Login to <https://developer.apple.com/account/resources/identifiers/list> with your Apple Developer account.

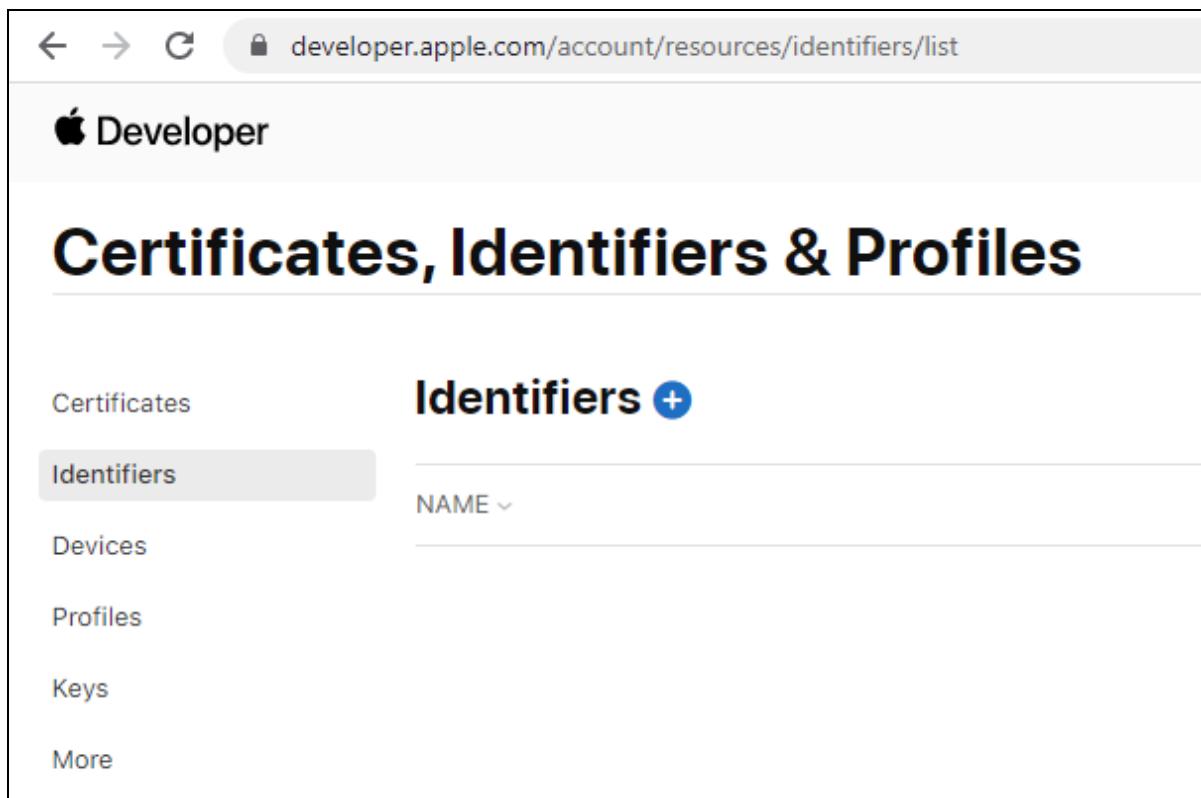

Press the “+” icon.

Apple Developer My Name ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

[All Identifiers](#)

Register a new identifier

Continue

App IDs
Register an App ID to enable your app, app extensions, or App Clip to access available services and identify your app in a provisioning profile. You can enable app services when you create an App ID or modify these settings later.

Services IDs
For each website that uses Sign in with Apple, register a services identifier (Services ID), configure your domain and return URL, and create an associated private key.

Select “App IDs”. Press Continue

Apple Developer My Name ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

[All Identifiers](#)

Register a new identifier

Back Continue

Select a type

App App Clip

Select “App” and press Continue.

Apple Developer

Michael Chan ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

[« All Identifiers](#)

Register an App ID

Platform: iOS, macOS, tvOS, watchOS

App ID Prefix: X34EGC2WXP (Team ID)

Description: ICA Sign in

Bundle ID: Explicit Wildcard
com.mycompany.ica

You cannot use special characters such as @, &, *, :, -, .

We recommend using a reverse-domain name style string (i.e., com.domainname.appname). It cannot contain an asterisk (*).

[Back](#) [Continue](#)

Enter “ICA Sign in” in the Description box. Choose “Explicit” and input a Bundle ID. Replace “com.mycompany.ica” with an identifier you decide.

[« All Identifiers](#)

Register an App ID

 Personal VPN ⓘ


 Push Notifications ⓘ

 Sign In with Apple ⓘ [Edit](#) Enable as a primary App ID

 SiriKit ⓘ

[Back](#) [Continue](#)

Scroll down and select “Sign in with Apple”. Press Continue

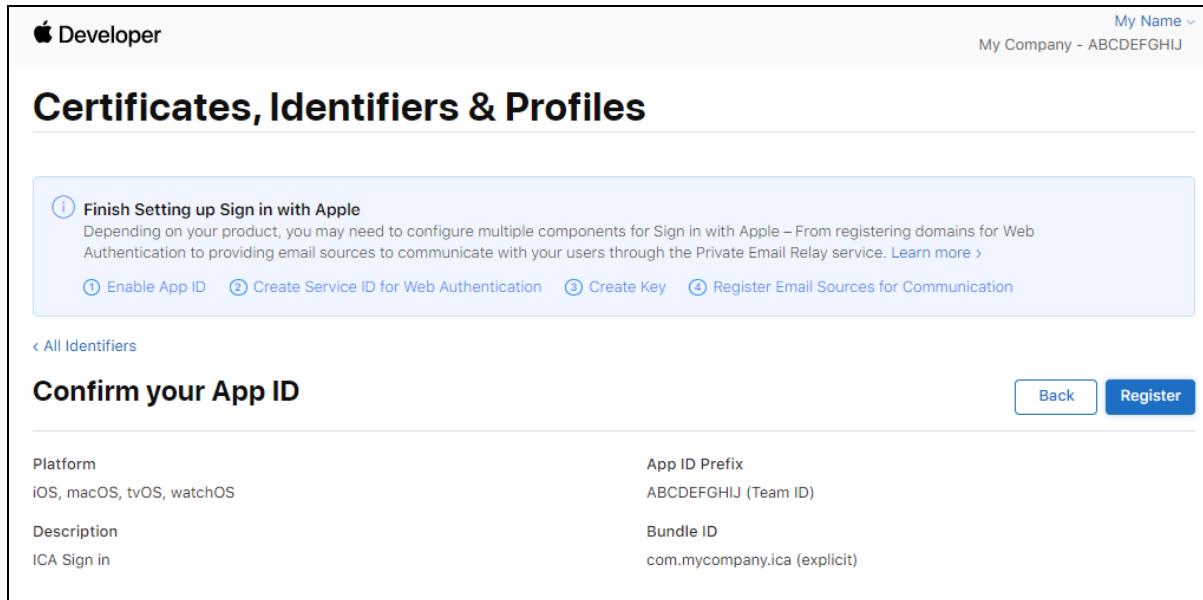

Apple Developer My Name ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

① Finish Setting up Sign in with Apple
Depending on your product, you may need to configure multiple components for Sign in with Apple – From registering domains for Web Authentication to providing email sources to communicate with your users through the Private Email Relay service. [Learn more >](#)

① Enable App ID ② Create Service ID for Web Authentication ③ Create Key ④ Register Email Sources for Communication


« All Identifiers

Confirm your App ID

Back Register

Platform iOS, macOS, tvOS, watchOS	App ID Prefix ABCDEFGH (Team ID)
Description ICA Sign in	Bundle ID com.mycompany.ica (explicit)

Press Register.

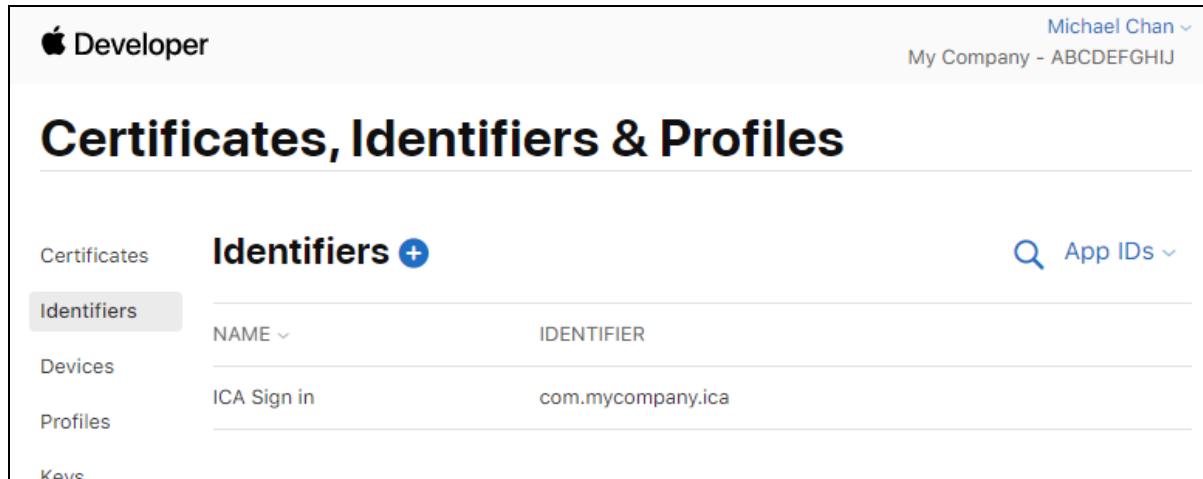

Apple Developer Michael Chan ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

Certificates Identifiers + App IDs ▾

Identifiers

	NAME ▾	IDENTIFIER
Devices	ICA Sign in	com.mycompany.ica
Profiles		
Keys		

Press the “+” icon again.

Apple Developer My Name ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

[All Identifiers](#)

Register a new identifier

[Continue](#)

App IDs
Register an App ID to enable your app, app extensions, or App Clip to access available services and identify your app in a provisioning profile. You can enable app services when you create an App ID or modify these settings later.

Services IDs
For each website that uses Sign in with Apple, register a services identifier (Services ID), configure your domain and return URL, and create an associated private key.

Select “Services IDs” and press Continue.

Apple Developer My Name ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles


[All Identifiers](#)

Register a Services ID

[Back](#) [Continue](#)

<p>Description</p> <input type="text" value="ICA Sign in"/> <p>You cannot use special characters such as @, &, *, +, -, .</p>	<p>Identifier</p> <input type="text" value="com.mycompany.ica-sign-in"/> <p>We recommend using a reverse-domain name style string (i.e., com.domainname.appname). It cannot contain an asterisk (*).</p>
---	--

Replace “com.mycompany.ica-sign-in” with an identifier you decide. This is your “Service ID”. Record this down.

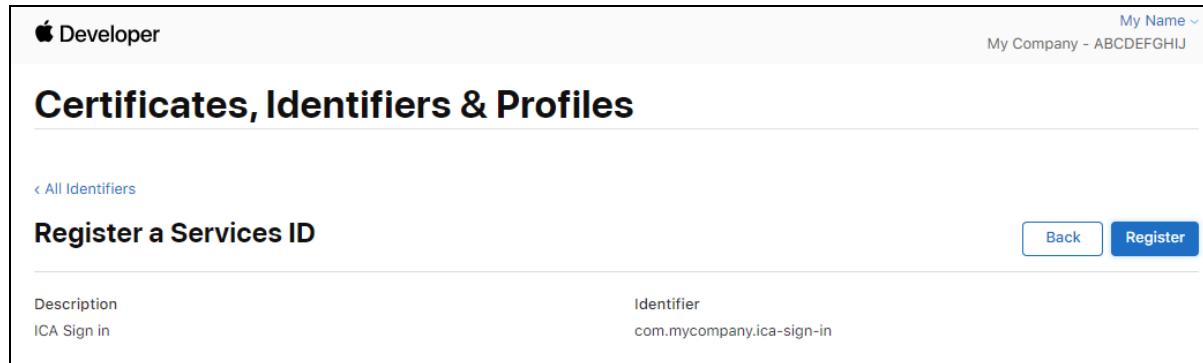

Apple Developer My Name ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles


[« All Identifiers](#)

Register a Services ID

Description: ICA Sign in Identifier: com.mycompany.ica-sign-in

[Back](#) [Register](#)

Press Register.

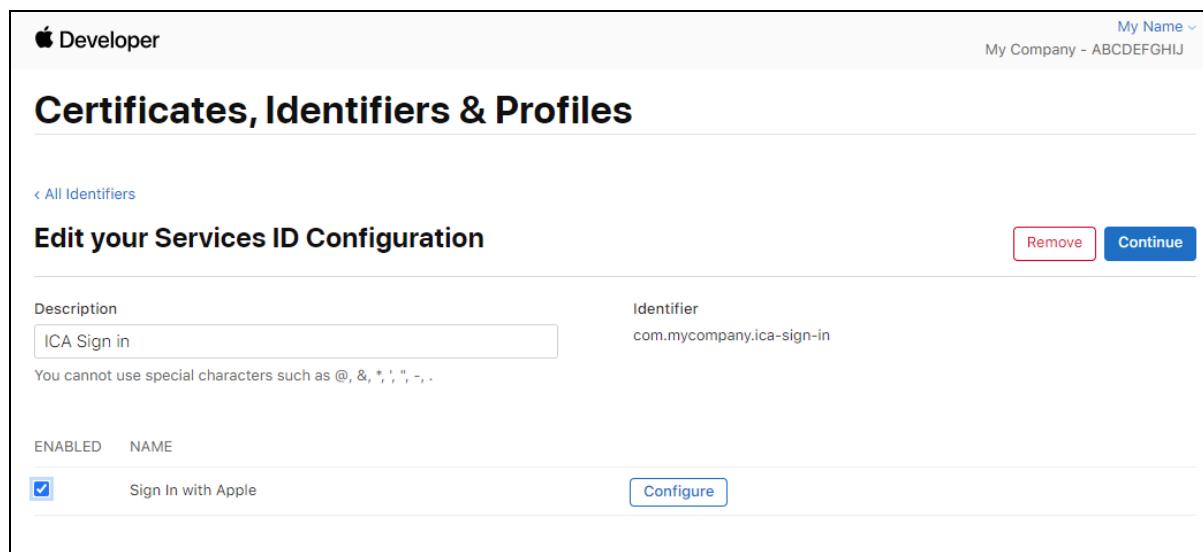

Apple Developer My Name ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

[« All Identifiers](#)

Edit your Services ID Configuration


Description: ICA Sign in Identifier: com.mycompany.ica-sign-in

You cannot use special characters such as @, &, *, :, -, .

ENABLED	NAME
<input checked="" type="checkbox"/>	Sign In with Apple

[Configure](#) [Remove](#) [Continue](#)

Press Configure.

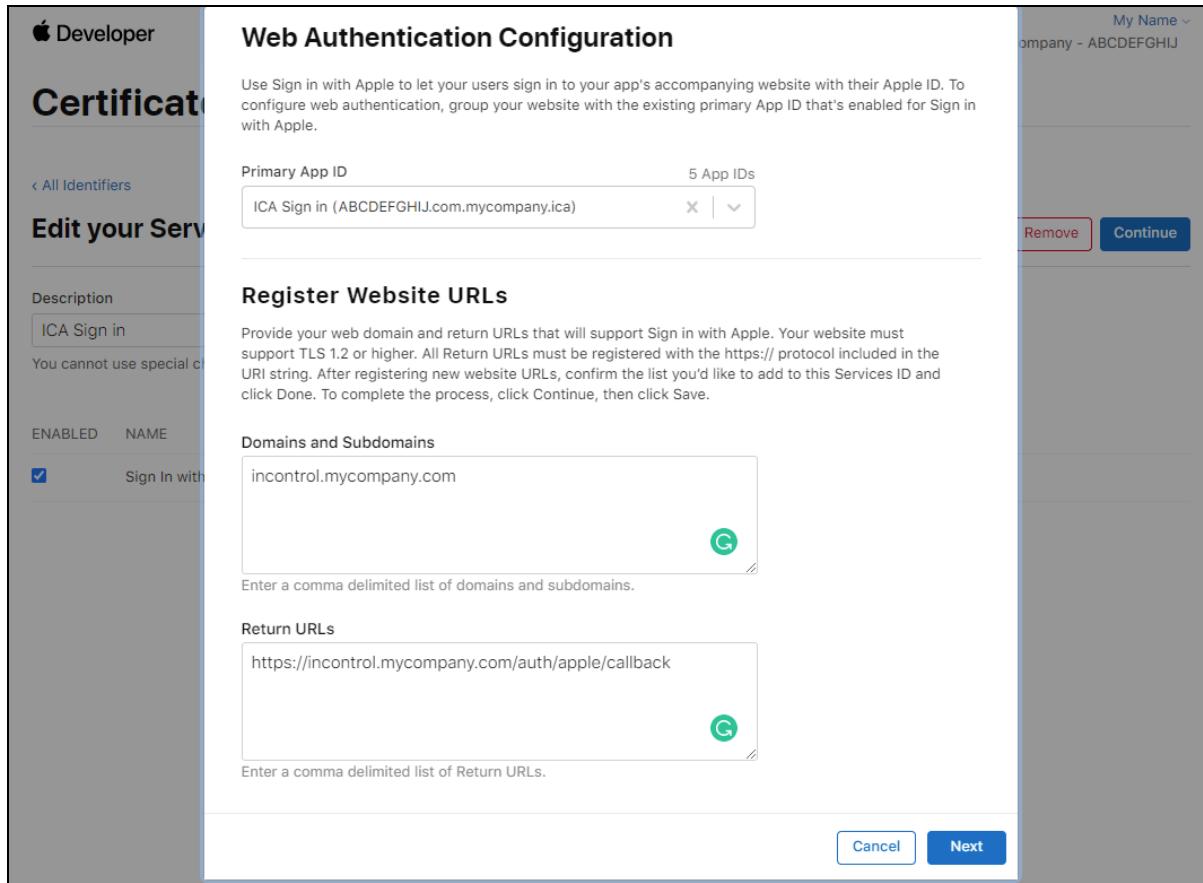

The screenshot shows the Apple Developer portal interface for configuring web authentication. On the left, a sidebar shows 'Certificates' and 'Edit your Services'. The main panel is titled 'Web Authentication Configuration' with the sub-section 'Register Website URLs'. It includes fields for 'Primary App ID' (ICA Sign in (ABCDEGHIJ.com.mycompany.ica)) and '5 App IDs'. Below this, there are sections for 'Domains and Subdomains' (containing 'incontrol.mycompany.com') and 'Return URLs' (containing 'https://incontrol.mycompany.com/auth/apple/callback'). A sidebar on the right shows user information ('My Name: Company - ABCDEFGHIJ') and buttons for 'Remove' and 'Continue'. At the bottom, there are 'Cancel' and 'Next' buttons.

Web Authentication Configuration

Use Sign in with Apple to let your users sign in to your app's accompanying website with their Apple ID. To configure web authentication, group your website with the existing primary App ID that's enabled for Sign in with Apple.

Primary App ID 5 App IDs

ICA Sign in (ABCDEGHIJ.com.mycompany.ica)

Register Website URLs

Provide your web domain and return URLs that will support Sign in with Apple. Your website must support TLS 1.2 or higher. All Return URLs must be registered with the https:// protocol included in the URL string. After registering new website URLs, confirm the list you'd like to add to this Services ID and click Done. To complete the process, click Continue, then click Save.

Domains and Subdomains

incontrol.mycompany.com

Enter a comma delimited list of domains and subdomains.


Return URLs

https://incontrol.mycompany.com/auth/apple/callback

Enter a comma delimited list of Return URLs.

Cancel

Replace "incontrol.mycompany.com" with your InControl's Server Name. The return URLs shall be "https://your_server_name/auth/apple/callback".

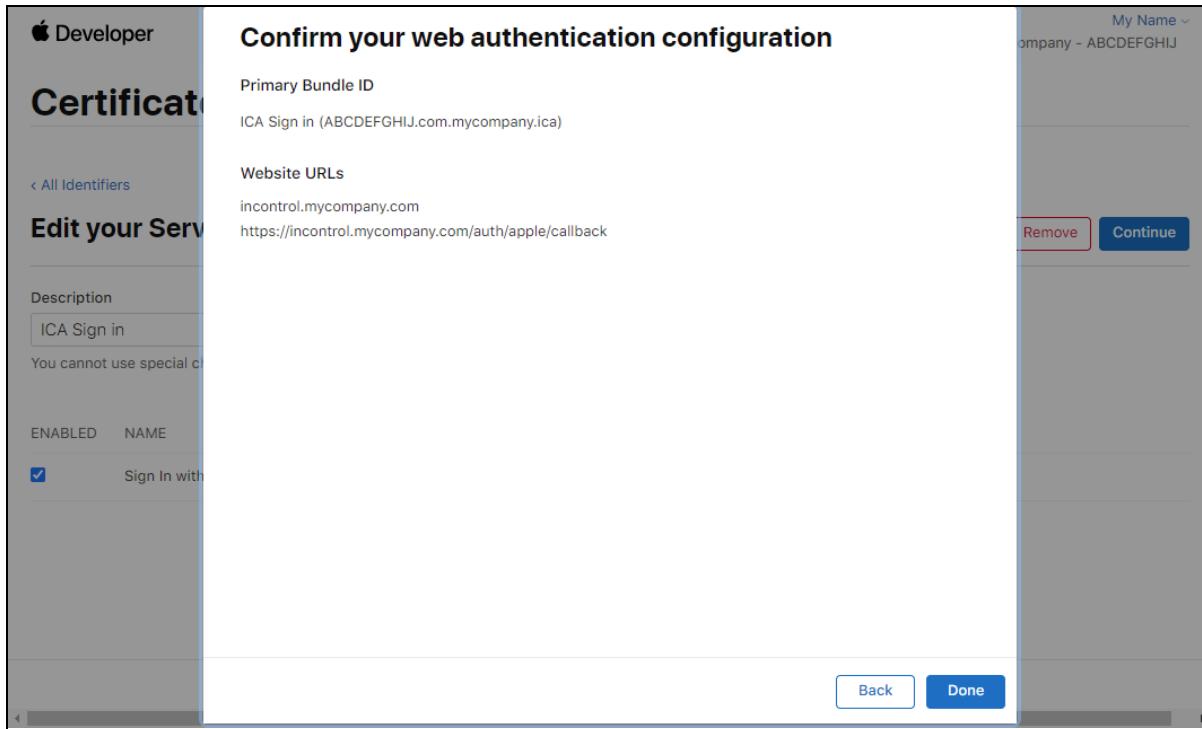

Confirm your web authentication configuration

Primary Bundle ID
ICA Sign in (ABCDEFHGIJ.com.mycompany.ica)

Website URLs
incontrol.mycompany.com
https://incontrol.mycompany.com/auth/apple/callback

Description
ICA Sign in

You cannot use special characters such as @, &, *, :, ", -, .

ENABLED NAME


Sign In with Apple

My Name ▾
Company - ABCDEFHGIJ

Remove Continue

Back Done

Press Done.

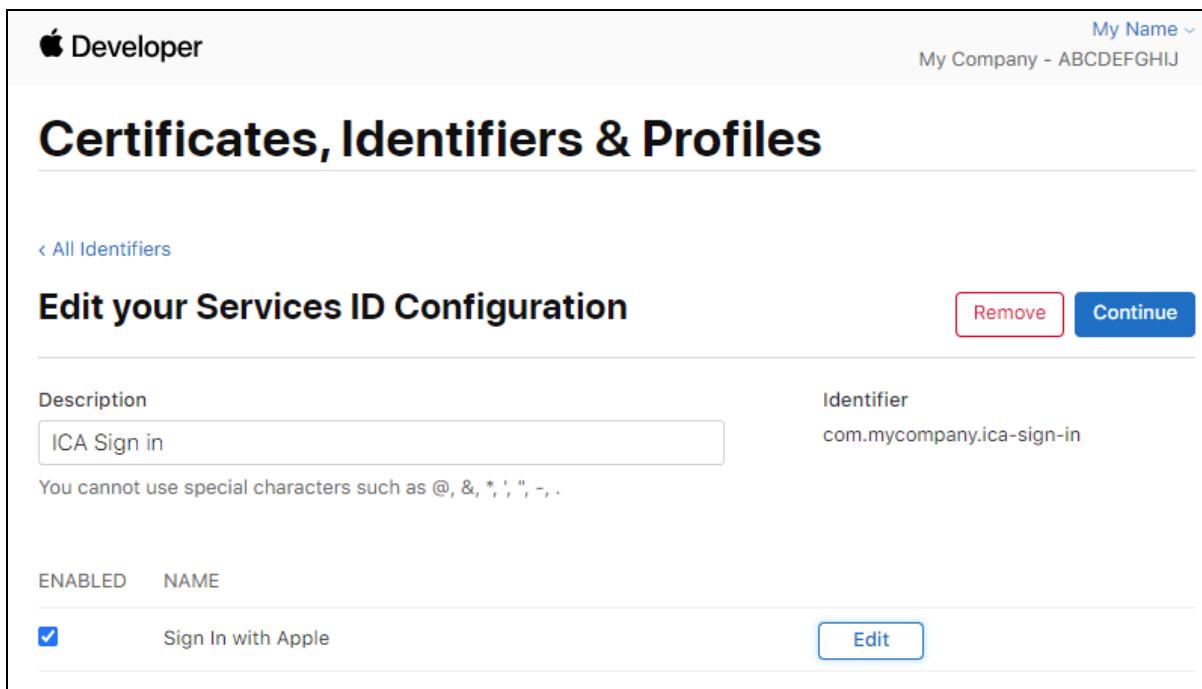

Certificates, Identifiers & Profiles

[All Identifiers](#)

Edit your Services ID Configuration

Description
ICA Sign in

You cannot use special characters such as @, &, *, :, ", -, .

ENABLED NAME

Sign In with Apple


Identifier
com.mycompany.ica-sign-in

My Name ▾
My Company - ABCDEFHGIJ

Remove Continue

Edit

Press Continue.

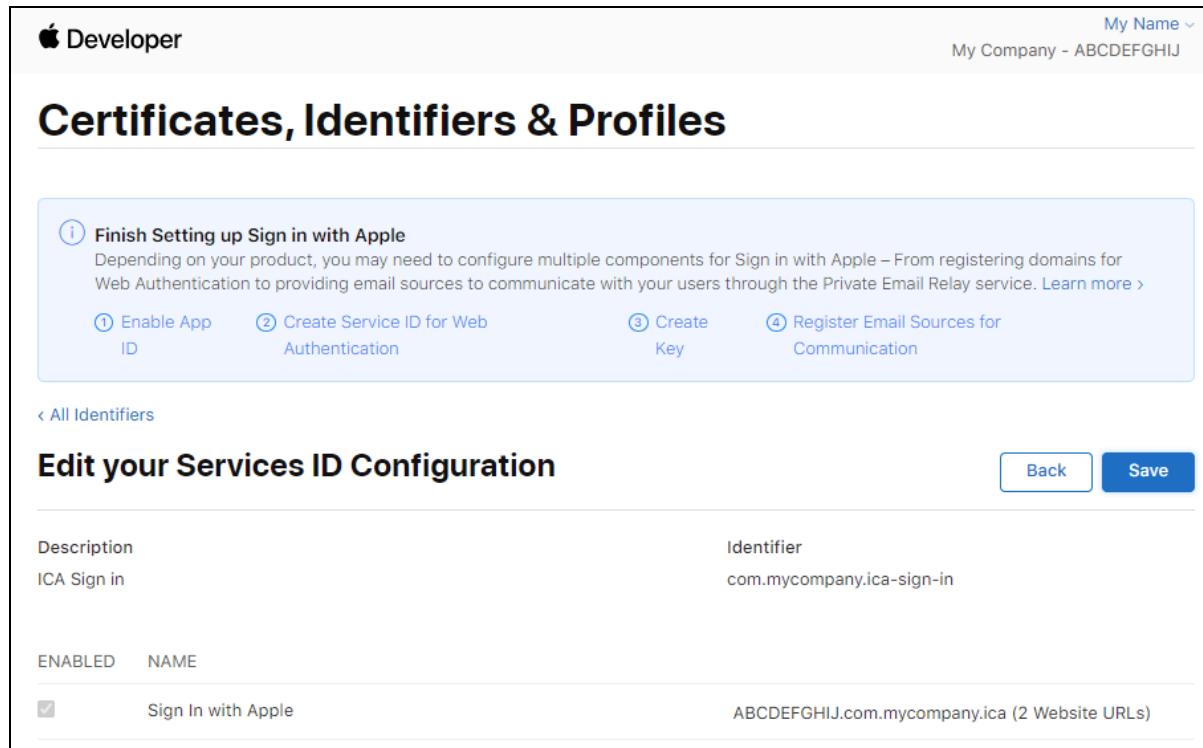

My Name 
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

Finish Setting up Sign in with Apple
Depending on your product, you may need to configure multiple components for Sign in with Apple – From registering domains for Web Authentication to providing email sources to communicate with your users through the Private Email Relay service. [Learn more >](#)

① Enable App ID **② Create Service ID for Web Authentication** **③ Create Key** **④ Register Email Sources for Communication**

< All Identifiers

Edit your Services ID Configuration

Back Save


Description	Identifier
ICA Sign in	com.mycompany.ica-sign-in

ENABLED NAME

<input checked="" type="checkbox"/> Sign In with Apple	ABCDEFGHIJ.com.mycompany.ica (2 Website URLs)
--	---

Press Save to save the Services ID.

Then press the “Keys” item on the right navigation bar.

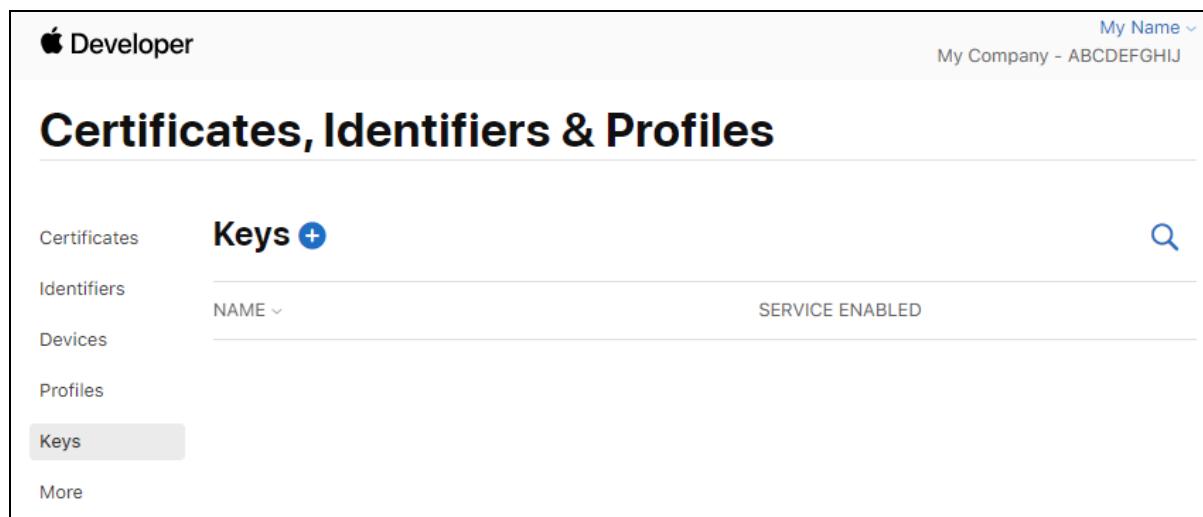

My Name 
My Company - ABCDEFGHIJ


Certificates, Identifiers & Profiles

Certificates **Keys +** 

Identifiers **Devices** **Profiles** **Keys** **More**

NAME	SERVICE ENABLED
	<input type="checkbox"/> SERVICE ENABLED

Press the “+” icon.

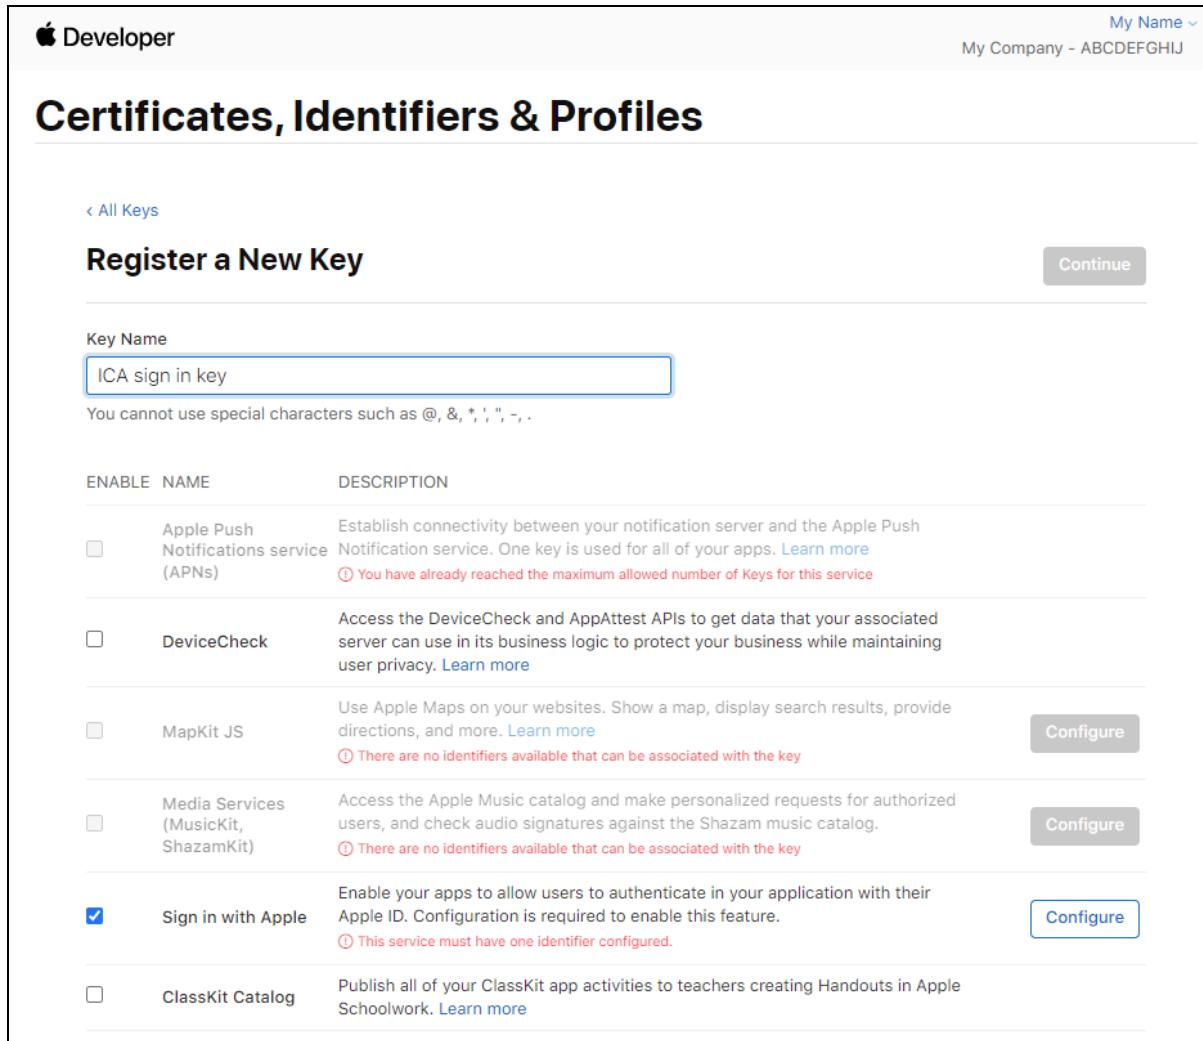

Apple Developer

My Name ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

< All Keys

Register a New Key

Continue

Key Name

ICA sign in key

You cannot use special characters such as @, &, *, ', ", -, .

ENABLE	NAME	DESCRIPTION	
<input type="checkbox"/>	Apple Push Notifications service (APNs)	Establish connectivity between your notification server and the Apple Push Notification service. One key is used for all of your apps. Learn more <small> ⓘ You have already reached the maximum allowed number of Keys for this service</small>	
<input type="checkbox"/>	DeviceCheck	Access the DeviceCheck and AppAttest APIs to get data that your associated server can use in its business logic to protect your business while maintaining user privacy. Learn more	
<input type="checkbox"/>	MapKit JS	Use Apple Maps on your websites. Show a map, display search results, provide directions, and more. Learn more <small> ⓘ There are no identifiers available that can be associated with the key</small>	Configure
<input type="checkbox"/>	Media Services (MusicKit, ShazamKit)	Access the Apple Music catalog and make personalized requests for authorized users, and check audio signatures against the Shazam music catalog. <small> ⓘ There are no identifiers available that can be associated with the key</small>	Configure
<input checked="" type="checkbox"/>	Sign in with Apple	Enable your apps to allow users to authenticate in your application with their Apple ID. Configuration is required to enable this feature. <small> ⓘ This service must have one identifier configured.</small>	Configure
<input type="checkbox"/>	ClassKit Catalog	Publish all of your ClassKit app activities to teachers creating Handouts in Apple Schoolwork. Learn more	

Input "ICA sign in key" in the Key Name field. Select "Sign in with Apple". Press Configure.

Apple Developer My Name ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

[View Key](#)

Configure Key

Back Save

Create a key for each of your primary App IDs in order to implement Sign in with Apple. This key will also be used for any App IDs grouped with the primary. The user will see your primary app's icon at sign in and in their Apple ID account settings.

Primary App ID: 4 App ID s

ICA Sign in (ABCDEFGHIJ.com.mycompany.ica) X | ▾

Grouped App IDs

These App IDs are enabled with Sign in with Apple by being grouped with the primary App ID selected above. Users will see your primary app's icon, terms and conditions, and privacy policy when they first sign in, and in their Apple ID account settings.

ICA Sign in (ABCDEFGHIJ.com.mycompany.ica-sign-in)

Select “ICA Sign in”. Press Save.

Apple Developer My Name ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

Finish Setting up Sign in with Apple

Depending on your product, you may need to configure multiple components for Sign in with Apple – From registering domains for Web Authentication to providing email sources to communicate with your users through the Private Email Relay service. [Learn more >](#)

① Enable App ID ② Create Service ID for Web Authentication ③ Create Key ④ Register Email Sources for Communication

[All Keys](#)

Register a New Key

Back Register

Key Name		
ICA sign in key		
ENABLE	NAME	DESCRIPTION
<input checked="" type="checkbox"/>	Sign in with Apple	Enable your apps to allow users to authenticate in your application with their Apple ID. Configuration is required to enable this feature.

Press Register.

Apple Developer My Name ▾
My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

[« All Keys](#)


Register a New Key

[Continue](#)

Key Name You cannot use special characters such as @, &, *, ', ", -, .

ENABLE	NAME	DESCRIPTION	Actions
<input type="checkbox"/>	Apple Push Notifications service (APNs)	Establish connectivity between your notification server and the Apple Push Notification service. One key is used for all of your apps. Learn more ⓘ You have already reached the maximum allowed number of Keys for this service	
<input type="checkbox"/>	DeviceCheck	Access the DeviceCheck and AppAttest APIs to get data that your associated server can use in its business logic to protect your business while maintaining user privacy. Learn more	
<input type="checkbox"/>	MapKit JS	Use Apple Maps on your websites. Show a map, display search results, provide directions, and more. Learn more ⓘ There are no identifiers available that can be associated with the key	Configure
<input type="checkbox"/>	Media Services (MusicKit, ShazamKit)	Access the Apple Music catalog and make personalized requests for authorized users, and check audio signatures against the Shazam music catalog. ⓘ There are no identifiers available that can be associated with the key	Configure
<input checked="" type="checkbox"/>	Sign in with Apple	Enable your apps to allow users to authenticate in your application with their Apple ID. Configuration is required to enable this feature.	Edit
<input type="checkbox"/>	ClassKit Catalog	Publish all of your ClassKit app activities to teachers creating Handouts in Apple Schoolwork. Learn more	

Press Continue.

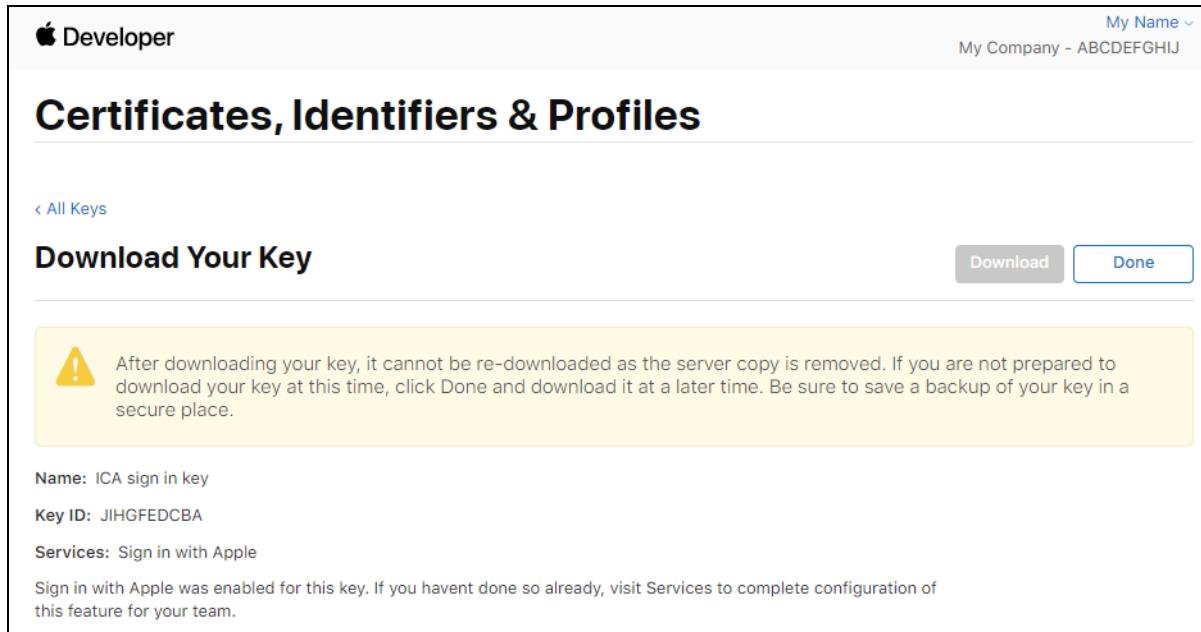

Apple Developer

My Name: My Company - ABCDEFGHIJ

Certificates, Identifiers & Profiles

< All Keys

Download Your Key

Download Done

⚠️ After downloading your key, it cannot be re-downloaded as the server copy is removed. If you are not prepared to download your key at this time, click Done and download it at a later time. Be sure to save a backup of your key in a secure place.

Name: ICA sign in key
Key ID: JIHGFEDCBA
Services: Sign in with Apple
Sign in with Apple was enabled for this key. If you havent done so already, visit Services to complete configuration of this feature for your team.

Download the **key file** (IMPORTANT). Record the **Key ID**.

Press Done only after you have downloaded the key.

Record the **Team ID** showing in the upper-right corner (i.e. "ABCDEFGHIJ" in the above screen.)

Now you can fill in the **Services ID**, **Team ID**, and **Key ID**, and upload the **key file** to the control panel to finish the Sign-in with Apple setup.


Note: when your users sign in to your InControl with Apple for the first time, they will be asked to choose whether to hide their email address from your InControl on Apple's website. It is a privacy feature of the Apple sign-in.

If they are self-signing up for an InControl account (like how Peplink InControl does), it will be up to them to choose to hide their email address or not.

But if you are inviting them to sign in to an organization/group with their email address, then they must choose "Show My Email". Otherwise, InControl will only see them log in as an Apple-generated email address. It will not be their original email address that you have invited. So they will not be able to access the organization/group.

In case they have mistakenly chosen "Hide My Email", you may either add their Apple-generated email address to the organization/group or advise them to follow the following procedure to change their preference:


1. Login to <https://appleid.apple.com>
2. Choose "Sign in with Apple"

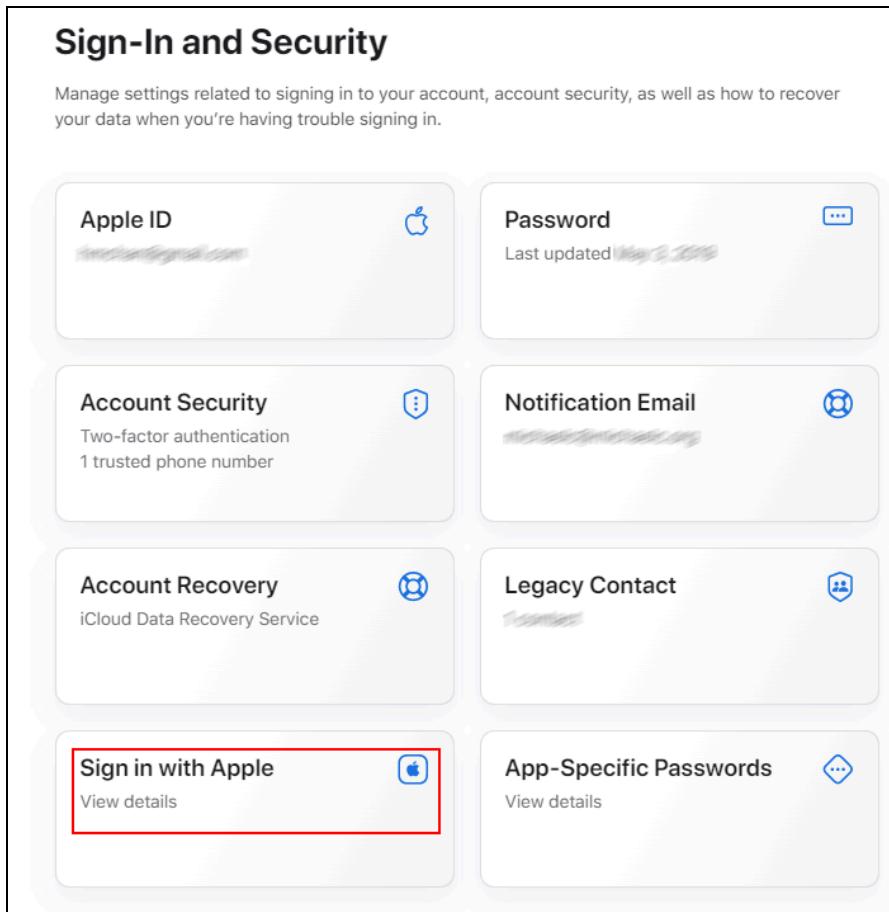

3. Select "ICA Sign in"



4. Click "Stop using Sign in with Apple" and then click "Stop using".

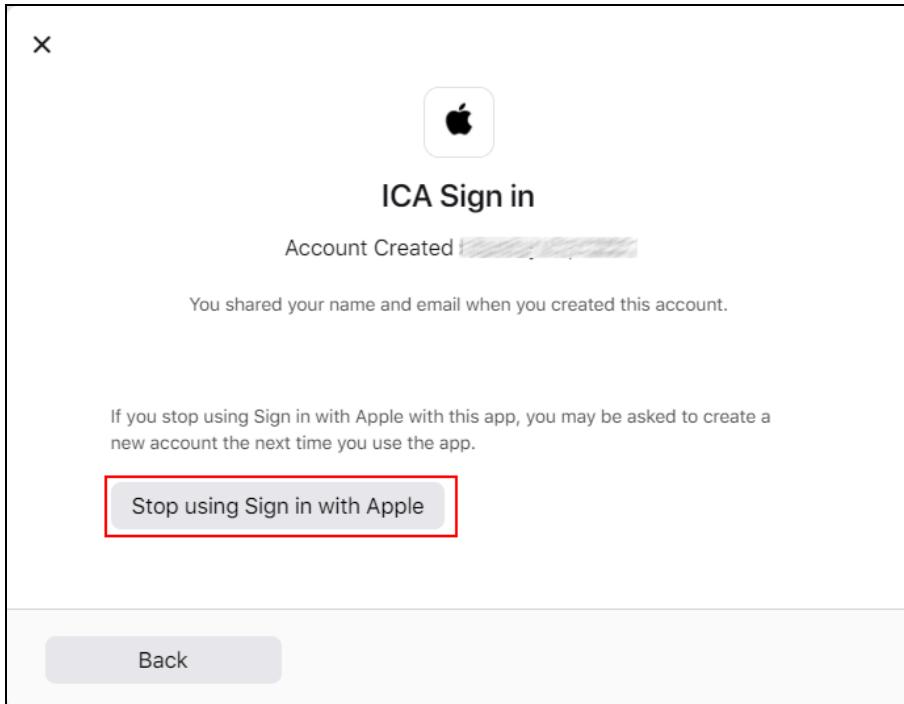

5. Sign out from your InControl. Sign in your InControl with Apple again. Choose "Share My Email" while logging in.

Now their account is well set.

Appendix 2: Procedure for setting up authentication with Okta

Step 1. Visit [Okta signup page](#). Choose the one of the two "Okta Platform" plans and sign up for an account. If you have already got an Okta account, skip this.

Step 2. Follow the instructions in [this article](#) for how to create an OAuth 2.0 app in Okta. The Sign-in redirect URI is `https://{{ICVA_SERVER_NAME}}/auth/openid/callback`

Step 3. Assign users to your Okta OAuth 2.0 app

1. In the Admin Console, go to "Applications" > "Applications"
2. Click your created Okta OAuth 2.0 app
3. Click "Assignments"
4. Click the "Assign" button and select "Assign to People"
5. Select people that allowed to access your Okta OAuth 2.0 app

Step 4: Follow the instructions in this article to get the Okta OpenID Connect Well-Known URL.

Step 5: Visit the ICVA's control panel, scroll down to the "Authentication Settings" section. Enable the "Sign-in with Open ID" option. Fill in the 5 fields accordingly. Fill in the "Okta OpenID Connect Well-Known URL" into the "OpenID Configuration URL" field.