



Built to last

Sturdy industrial-strength designed for continuous high-traffic operation.



Stay Connected

With two SIM slots and an eSIM, the MAX Adapter always has a way to connect.

Compatible with 5G

MAX Adapter now offers a 5G compatible device option. Bringing 5G connectivity to your devices.

MAX ADAPTER
State-of-the-art Cellular Modem at a breakthrough price point




Portable

The light and sleek enclosure offers portability in the palm of your hands.



Connect with

peplink | PEPWAVE

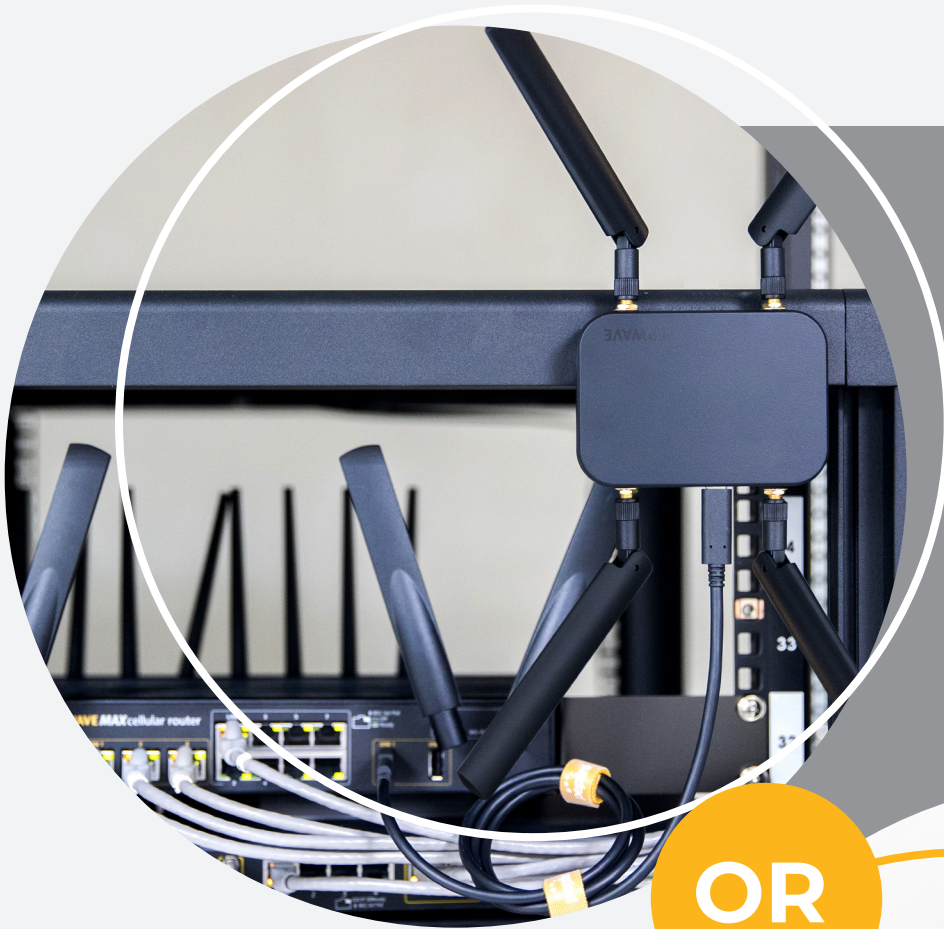

Peplink Products

Protect and reinforce products[^] with a USB port and make it a 5G/LTE WAN.

 [Learn More](#)

OR

Windows & Linux* Devices

Providing 5G/LTE connectivity for Windows and Linux devices on-the-go.



[^] For compatible models, please refer to the MAX Adapter [FAQ](#).

* For users on the Linux, please refer to our MAX Adapter user manual to set up.

peplink | PEPWAVE

www.peplink.com

©Peplink. All rights reserved.



Specifications

| | | | |
|--------------------------|--|---------------------------|--|
| Cellular WAN Interfaces | Single 5G Modem | Operating Temperature | 32° – 104°F / 0° – 40°C |
| Redundant SIM Slot | Yes | Humidity | 15% – 95% (non-condensing) |
| Downlink/Uplink Datarate | 5G: 4 Gbps / 700 Mbps LTE CAT-20: 2 Gbps / 150 Mbps | Warranty | 1-Year Limited Warranty |
| Antenna Connectors | 4x SMA Cellular | Certifications | FCC, CE, IC |
| Power Input | 5V USB-C | Package Content | MAX Adapter 5G, 4x LTE/5G LTE Antennas (ACW-235), USB-C Female to USB-A Male Adapter, USB-C Power Cable |
| Power Consumption | 5W (nominal), 8W (max.) | US Carrier Certifications | AT&T, T-Mobile, US Cellular, Verizon |
| Dimensions | 3.9 x 2.8 x 0.7 inches / 100 x 71 x 18.4 mm | | |
| Weight | 120g | | |

Ordering information

| Product Code | Carrier / Category | 5G Bands | LTE Bands |
|---------------|--------------------|---|---|
| MAX-ADP-5GH-T | Global / 5G | 5G (NSA) Sub 6Ghz: n1, n2, n3, n5, n28, n41, n66, n71, n77, n78, n79 | B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32,B34, B38, B39, B40, B41, B42, B46, B48, B66, B71 |



Specifications

| | | | |
|---------------------------------|--|----------------------------------|--|
| Cellular WAN Interfaces | Single LTE Modem | Weight | 120g |
| Redundant SIM Slot | Yes | Operating Temperature | 32° – 104°F / 0° – 40°C |
| Downlink/Uplink Datarate | CAT-12: 600 Mbps / 150 Mbps CAT-6: 300Mbps / 50Mbps | Humidity | 15% – 95% (non-condensing) |
| Antenna Connectors | 2x SMA Cellular, 1x SMA GPS | Warranty | 1-Year Limited Warranty |
| Power Input | 5V USB-C | Certifications | FCC, CE, IC |
| Power Consumption | 5W (nominal), 8W (max.) | Package Content | MAX Adapter, 2x LTE Antennas (ACW-813), USB-C Female to USB-A Male Adapter, USB-C Power Cable |
| Dimensions | 3.9 x 2.8 x 0.7 inches / 100 x 71 x 18.4 mm | US Carrier Certifications | AT&T, T-Mobile, Verizon |

Ordering information

| Product Code | Carrier / Category | LTE Bands | 3G Bands |
|------------------|--------------------|--|---|
| MAX-ADP-LTEA-K-T | Global CAT-12 | B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66 | HSPA+: B1, B2, B4, B5, B6, B8, B9, B19 |
| MAX-ADP-LTEA-R-T | America CAT-12 | B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B14, B18, B19, B20, B26, B29, B30, B32, B41, B42, B43, B46, B48, B66 | HSPA+: B1, B2, B4, B5, B6, B8, B9, B19 |
| MAX-ADP-LTEA-W-T | Global CAT-6 | B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41 | WCDMA/HSPA+/DC-HSPA+: B1, B2, B3, B4, B5, B8 |

Accessories

| Product Code | Description |
|--------------|-------------|
| ACW-232 | GPS Antenna |