

Balance 20X

Start Now



1

Plug in Power

Plug in the **Power Supply** to the Power Port and install the **antennas** or **cable ends** into the corresponding connectors.

Types of Antenna Connectors :

Wi-Fi



Cellular



GPS



SMA Cellular
Antenna Connector

SMA Cellular
Antenna Connector

Reset
Button

USB WAN
Port*

FlexModule Mini*

* Add a USB WAN, FlexModule Mini, or SIM cards if applicable.

Wi-Fi Antenna
Connector

Power
Port

GPS Antenna
Connector

LAN Ports

WAN Port

Wi-Fi Antenna
Connector

SIM Slot*
(at the bottom of the B20X)





2

Connect to Computer

Use an Ethernet cable* or Wi-Fi to connect to a computer.

* Ethernet cable not included.

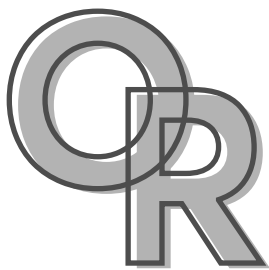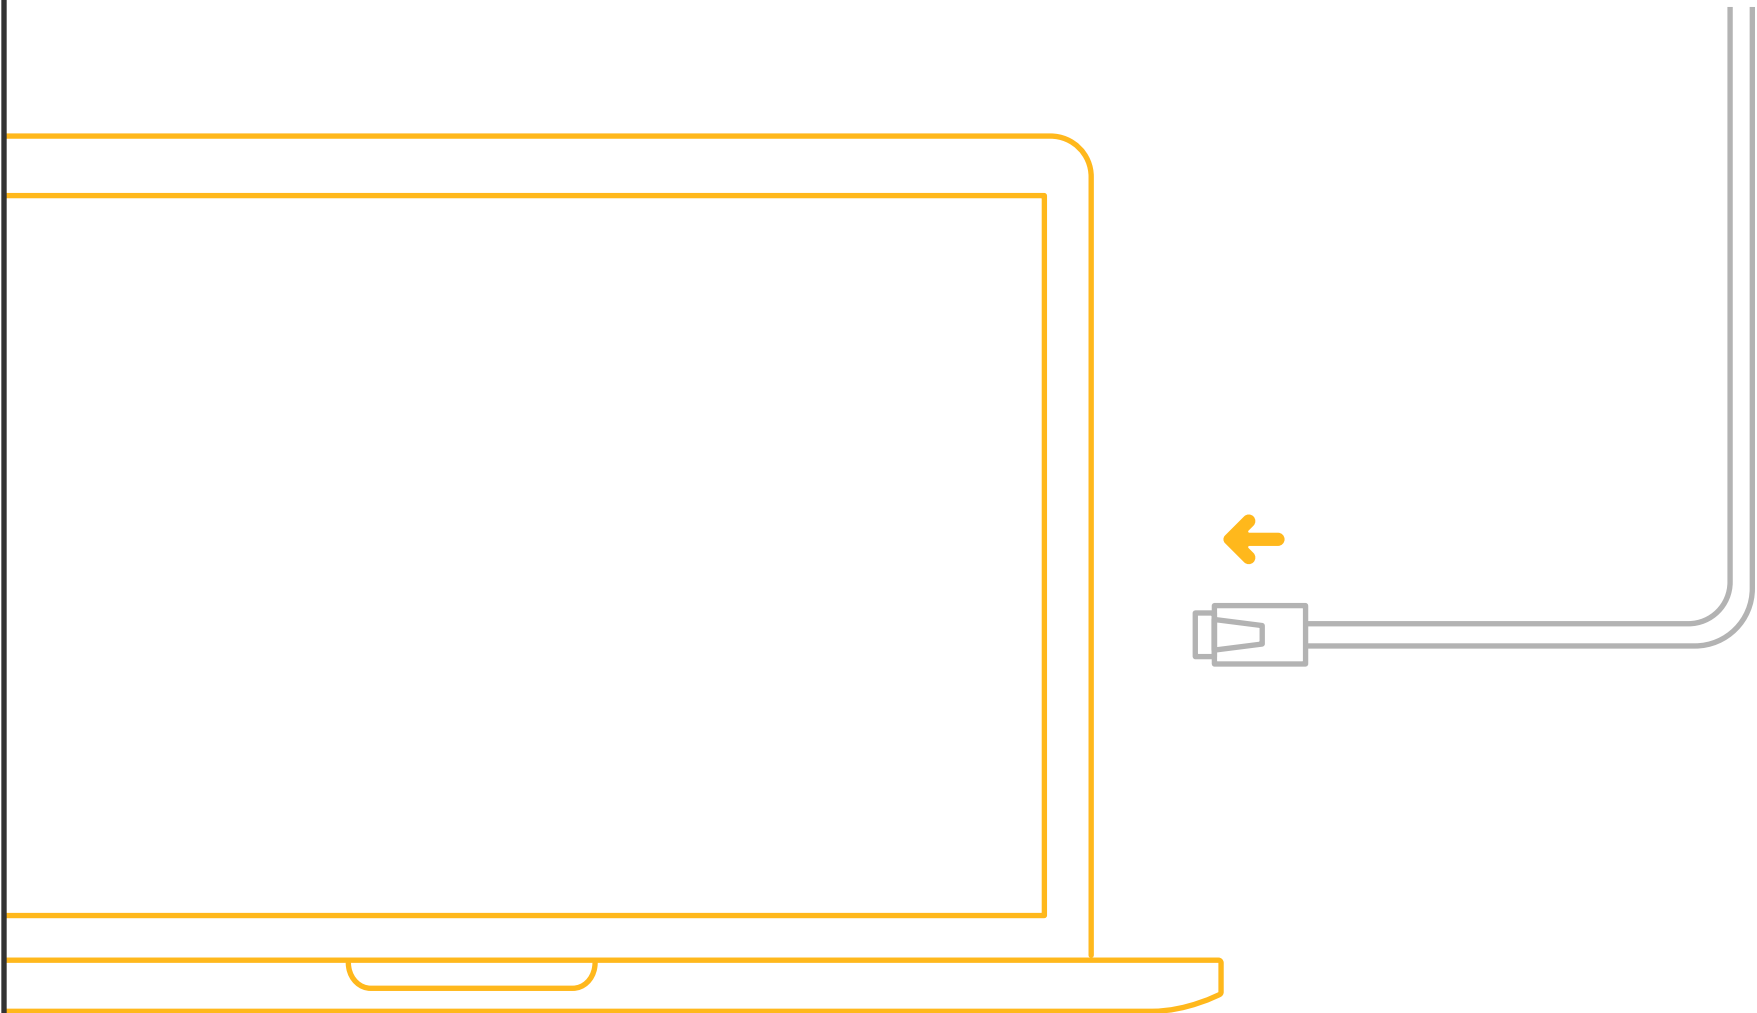

Wi-Fi name (SSID):

PEPLINK_CDEF

Serial No.: 1234-56AB-CDEF#

LAN MAC: A1-B2-C3-D4-E5-F6

Check the label at the bottom of the B20X

Password:

C3D4E5F6

3

WAN Setup

Connect to the WAN using an Ethernet cable, USB or SIM card, then open a web browser to configure the B20X.



USB Modem

OR



Insert SIM

OR



Ethernet



Enter router IP address

https://192.168.1.1

peplink

Username

admin


Password

admin

Login

Enter username and password and click "Login"


Default username and password is "admin"

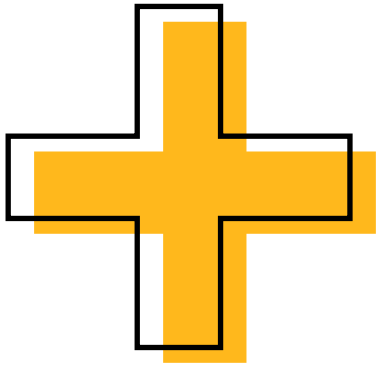

User Manual*

peplink.com/manual [GO](https://peplink.com/manual)

* For access to certification regulations and Directive 2014/35/EU requirements, please download the user manual for your devices.

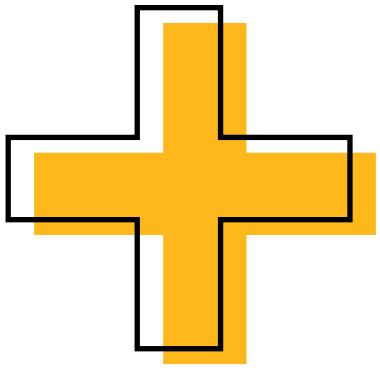


Frequently Asked Questions

peplink.com/faq [GO](https://peplink.com/faq)




Extend Warranty

peplink.com/extend-warranty [GO](https://peplink.com/extend-warranty)

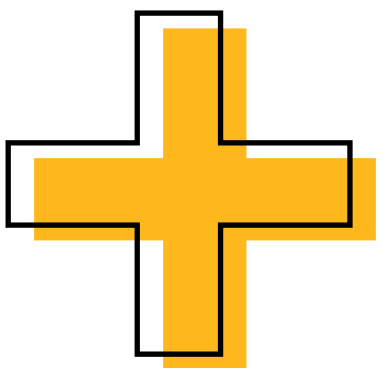

Warranty Options

peplink.com/warranty-options [GO](https://peplink.com/warranty-options)

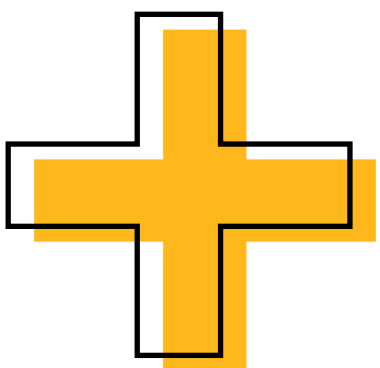

Software Primer

peplink.com/software-primer [GO](https://peplink.com/software-primer)

peplink.com



©Peplink | Pepwave. All rights reserved
Last update: Jan 2023