

MAX BR1 M2M

Specialized Cellular Router for M2M Communications



The MAX BR1 M2M is compact (1.1 x 3.8 x 4.8 inches), and tough enough to be placed anywhere. It features a 9-pin serial connector for easy and durable M2M connectivity. Also, it can be remotely monitored and managed using InControl 2 Cloud management, saving service trips.



InControl²
Setup.Manage.Report.



Remote Device Management

Remotely manage the MAX BR1 M2M by the InControl 2 cloud based management platform. Schedule automated firmware updates for groups of devices, and more.

SpeedFusion Hot Failover

The MAX BR1 M2M automatically re-establishes your IPsec VPN connection on lower priority link when your primary WAN fails. Your VPN stays up, and you stay seamlessly connected.

Din-Rail Mountable



Install your BR1 M2M in minutes with just a screwdriver. It attaches directly to any DIN rail for quick and secure deployment in utility boxes and other locations.

MAX BR1 M2M

Specialized Cellular Router for M2M Communications

Specifications

BR1 M2M	
WAN Interface	1x 10/100M Ethernet Port 1x Embedded 4G Cellular Modem
LAN Interface	1x 10/100M Ethernet Port
Drop-in Mode	●
Antenna Connectors	2x SMA Cellular Antenna Connectors
Power Input	Device: Molex Micro-Fit 10V – 30V DC
Power Consumption	Max.: 10W, Typical: 8.5W, Min.: 6W
Dimensions	4.7 x 3.8 x 1.1 inches 120 x 97 x 26.5 mm (L x W x H)
Weight	0.8 pound 350 grams
Operating Temperature	-40° – 149°F -40° – 65°C
Humidity	15% – 95% (non-condensing)
Warranty	1-Year Limited Warranty
Package Content	MAX BR1 M2M, 12V2A 4-Pin Power Supply (ACW-624), 1x Mounting Kit (ACW-736), 2x LTE Antennas (ACW-813)

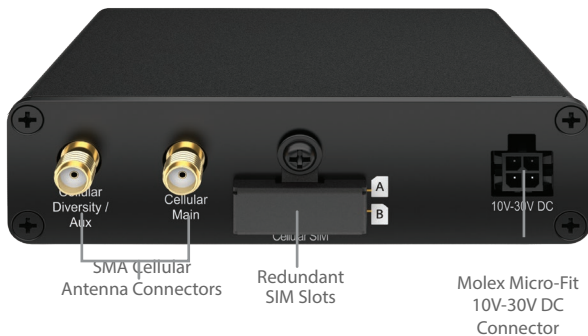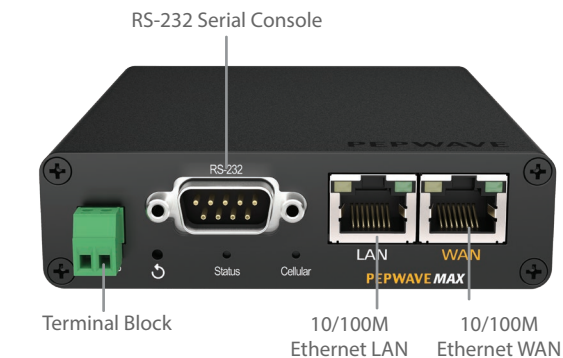

Ordering Information

Product Code	Carrier/Region	Embedded Modem	4G Bands	3G Bands
MAX-BR1-M2M-LTE-E-T	Europe/International	1	4G LTE: B1, B3, B5, B7, B8, B20, B38 (TDD), B40(TDD), B41 (TDD)	WCDMA/HSPA+/DC-HSPA+: B1, B5, B8

Add-on Features

Product Code	Description
PVN-LC-05	Enables up to 5 PepVPN peers
MAX-BR1-ADV	Package includes a software license key for Advanced Car-Fi Roaming; and SpeedFusion and IPsec X.509 Certificate Support